

---

# Lightweight Online Adaption for Time Series Foundation Model Forecasts

---

Thomas L. Lee<sup>\*1,2</sup> William Toner<sup>\*3</sup> Rajkarn Singh<sup>3</sup> Artjom Joosen<sup>3</sup> Martin Asenov<sup>3</sup>

## Abstract


Foundation models (FMs) have emerged as a promising approach for time series forecasting. While effective, FMs typically remain fixed during deployment due to the high computational costs of learning them online. Consequently, deployed FMs fail to adapt their forecasts to current data characteristics, despite the availability of online feedback from newly arriving data. This raises the question of whether FM performance can be enhanced by the *efficient* usage of this feedback. We propose *ELF* to answer this question.

*ELF* is a lightweight mechanism for the online adaption of FM forecasts in response to online feedback, comprising two parts: **a)** the *ELF-Forecaster*, which learns the current data distribution; and **b)** the *ELF-Weighter*, which combines forecasts from the FM and the *ELF-Forecaster*. We evaluate *ELF* with several recent FMs on standard time series datasets and find that it improves performance in *all* cases. This work shows that efficiently leveraging online feedback can enhance FM forecasts.

## 1. Introduction

Foundation models (FMs) (Miller et al., 2024; Ansari et al., 2024; Woo et al., 2024) have emerged as an important new paradigm for zero-shot time series forecasting. While effective FMs remain fixed during deployment, making them non-adaptive to shifts in the underlying distribution. In time series deployment scenarios however, new data arrives continuously, providing feedback on forecast accuracy and changes in the underlying behaviour of the time series (Zhang et al., 2024). This raises the possibility of using online feedback to enhance FM performance. This poses a challenge however,

<sup>\*</sup>Equal contribution <sup>1</sup>School of Informatics, University of Edinburgh, UK <sup>2</sup>Work done while an intern at Huawei <sup>3</sup>Huawei SIR Lab, Edinburgh Research Centre, UK. Correspondence to: Thomas L. Lee <T.L.Lee-1@sms.ed.ac.uk>, William Toner <william.toner2@huawei.com>.

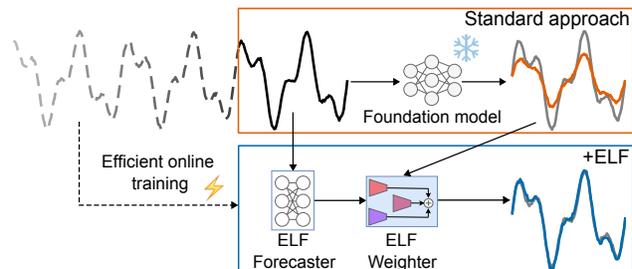

**Figure 1. Exploitation of online information for forecast adaption in deployment:** Time series foundation models (FMs) are typically seen as fixed when deployed. We propose a method, *ELF*, to efficiently improve their forecasts online by leveraging the feedback available in realistic deployment scenarios. *ELF* consists of two components: the *ELF-Forecaster*, a lightweight forecaster, learnt online; and the *ELF-Weighter* a dynamic method to adapt the FM forecasts by combining it with the *ELF-Forecaster*'s forecasts.

as computational efficiency is a critical requirement for any online adaptation mechanism to be practical in real-world time series settings (Joosen et al., 2024). Potential naive approaches to online adaptation, such as regular retraining or continual finetuning on available data, are at present prohibitively expensive. Currently, there is *no general, efficient method for leveraging online feedback in time series FMs at deployment*.

In this work, we propose *ELF* (standing for **E**nsembling with online **L**inear **F**orecaster), an efficient approach for online adaptation for time series FMs at deployment. *ELF* does not alter the parameters of an FM, which remain fixed during deployment, instead adapting the *forecasts* output by the FM. In effect, we take a non-online FM and turn it into an efficient online model, FM+*ELF* (see Figure 1). This approach works by ensembling the FM with a linear forecaster; the ensemble weights and forecaster being learned efficiently online. This approach is lightweight, running on a single CPU, making implementation cheap. A summary of related work and glossary of notation are provided in the Appendices **A,B**.

## 2. ELF: Online Adaption of Forecasts

*ELF* consists of two components:

1. A lightweight linear forecaster applied in the

Fourier domain—the *ELF-Forecaster*—which can be efficiently fit online via the Woodbury matrix identity.

2. A dynamic weighter—the *ELF-Weighter*—to ensemble the ELF-Forecaster and FM forecasts. This is constructed out of fast and slow components to quickly adapt the weighting to shifting data distributions.

## 2.1. ELF-Forecaster

The ELF-Forecaster is a linear forecast model used to provide forecasts based on the data seen online from the time series. We use a linear forecaster for three reasons: **a)** they have good performance in time series forecasting (Zeng et al., 2023); **b)** as required by our setting, they can be efficiently updated online; and **c)** online updating of linear models does not suffer from the same problems of catastrophic forgetting as the online updating neural networks (De Lange et al., 2021).

**Forecasting** The linear ELF-Forecaster forecasts in the Fourier domain, being inspired by the FITS forecaster presented in Xu et al. (2023). To produce a forecast the ELF-Forecaster takes in a context vector  $\mathbf{x} \in \mathbb{R}^L$  and applies the Discrete Fourier Transform (DFT). After this, to improve updating efficiency, the highest frequencies are discarded reducing the input dimensionality from  $L$  to  $2 \lfloor \frac{\alpha L}{2} \rfloor \approx \alpha L$  (where typically  $\alpha = 0.9$ ). We multiply the resulting low-dimensional vector by a complex weight matrix  $W$  of shape  $\alpha L \times \frac{\alpha H}{2}$ . The output of this operation is zero-padded up to dimensionality  $(1 + \frac{H}{2})$  where  $H$  is the desired forecast horizon length. Finally, we apply the inverse Real Fourier Transform (iRFT) to generate the forecast  $\hat{\mathbf{y}} \in \mathbb{R}^H$ .

**Online Fitting** ; The ELF-Forecaster is refit every *update step*  $\tau$  (i.e., every  $M = 200$  time steps) by minimizing mean squared error (MSE) between its forecasts and the ground truth across all past data. As a linear model, it admits a closed-form solution, avoiding gradient-based optimization and the need to store all data (Toner & Darlow, 2024). To further speed up fitting, we: 1) apply the *Woodbury Matrix Identity* (Woodbury, 1950) for efficient updates, and 2) reduce the weight matrix dimensionality by discarding high-frequency components. Full algorithmic details are in Appendix C.2.

## 2.2. ELF-Weighter

The *ELF-Weighter* combines the forecasts of the FM and the ELF-Forecaster; adapting the FM’s forecast by incorporating the knowledge learnt online by the ELF-Forecaster. We combine the forecasts by taking a weighted average of them. Denoting the forecasts of the FM and the ELF-Forecaster at time step  $t$  by  $\hat{\mathbf{y}}_{t,FM}$  and  $\hat{\mathbf{y}}_{t,EF}$ , respectively, the combined forecast is given by

$$\hat{\mathbf{y}}_{t,ELF} = w_\tau \hat{\mathbf{y}}_{t,FM} + (1 - w_\tau) \hat{\mathbf{y}}_{t,EF}. \quad (1)$$

The weight  $w_\tau \in [0, 1]$  is adjusted online by the ELF-Weighter to reflect the changes in the relative performance

between the FM’s and ELF-Forecaster’s forecasts. We use a weighted average to combine forecasts because the general idea has been shown theoretically to improve performance (Cesa-Bianchi & Lugosi, 2006).

The basic building block of the ELF-Weighter is exponential weighting which is a celebrated method from the online learning community (Cesa-Bianchi & Lugosi, 2006; Rakhlin & Kleiner, 2008) and can be used to weight forecasts. However, the standard way to perform exponential weighting has the drawback of being quite slow to adapt to changes in the relative performance differences between the forecasters. To be more adaptive we are inspired by Complementary Learning System theory (McClelland et al., 1995; Kumaran et al., 2016; Ba et al., 2016) to use a combination of a slow exponential weighter, which learns weights based on the *whole* history, and a fast weighter, which only uses the *recent* history.

**Exponential Weighting** is a method for combining  $K$  forecasters by computing a weighted average of their forecasts, where the weights are learned online based on the past losses of each forecaster. We describe first the general case, where for  $K$  forecasters  $\omega_{\tau,k}$  denotes the weight for the  $k^{\text{th}}$  forecaster at update step  $\tau$ . The weights are at update step  $\tau$  are given by

$$\omega_{\tau,k} = \frac{e^{-\eta \sum_{\tau'=1}^{\tau} \text{Loss}_{\tau',k}}}{\sum_{k'=1}^K e^{-\eta \sum_{\tau'=1}^{\tau} \text{Loss}_{\tau',k'}}}. \quad (2)$$

where  $\text{Loss}_{\tau,k}$  denotes the loss incurred by the  $k^{\text{th}}$  forecaster on update step  $\tau$ ,  $\eta$  denotes a predefined learning rate and where we assume  $\omega_{0,k} = 1$  for all  $k$ . Hence the weights learnt by exponential weighting is a softmax of the cumulative losses incurred so far by the forecasters. This update rule has two desirable properties: **a)** the worse a forecaster performs the smaller its weight, and **b)** the weighter is affected less and less by individual updates as time progresses.

**Slow and Fast Weighters** Exponential weighting is effective but adapts slowly to distribution shift (Jadbabaie et al., 2015; Cesa-Bianchi et al., 2012; Zhao et al., 2020), since recent and distant losses are treated equally when forming weights. Hence, it takes several update steps for there to be enough losses from a new data distribution to outweigh older losses to correctly adjust the weights. To address this, we introduce a pair of weighters: **a)** a **slow** weighter which is an exponential weighter, between the FM and ELF-Forecaster (as in Eqn. 2). **b)** A **fast** weighter, identical to the slow weighter but only using losses from the last  $B$  update steps. *The fast weight for the FM forecast*  $w_\tau^{\text{fast}}$  at update step  $\tau$  is

$$w_\tau^{\text{fast}} = \frac{e^{-\eta \sum_{\tau'=\tau-B}^{\tau} \text{Loss}_{\tau',1}}}{\sum_{k'=1}^2 e^{-\eta \sum_{\tau'=\tau-B}^{\tau} \text{Loss}_{\tau',k'}}}.$$

By only using the last  $B$  updates for the fast weighter we aim to make it more adaptive than the slow weighter to the

current relative performance difference between the FM and ELF-Forecaster. Additionally, note that in our setting we always have  $K = 2$ , this means we effectively have a single weight for each weighter where, for instance, *the slow weight for the ELF-Forecaster is  $1 - w_\tau^{slow}$* .

The final part of the ELF-Weighter is a mechanism for synthesising a single weight  $w_\tau$  from the fast and slow weights ( $w_\tau^{fast}, w_\tau^{slow}$  respectively).  $w_\tau$  is used for combining the forecasts of the FM and ELF-Forecaster as in Equation 1. We use an exponential weighter, the **merge** weighter, to produce this final weight. An algorithmic description of all the components of the ELF-Weighter is given in Appendix C.3.

### 3. Experiments

#### 3.1. Experimental Setup

To evaluate the performance of ELF we simulate how it would perform in a deployment scenario. Specifically, we adopt the rolling window setting moving through the time series and producing forecasts one time step at a time. We update ELF every  $M = 200$  time steps using the online feedback provided by the newest 200 data points.

**Foundation Models (FMs)** We evaluate ELF in combination with several time series FMs: Chronos (tiny) (Ansari et al., 2024), TTM (rev. 2) (Ekambaram et al., 2024), TimesFM (Das et al., 2024), Moirai (small) (Woo et al., 2024), and VisionTS (Chen et al., 2024). Each FM is assessed with and without ELF.

**Datasets** We evaluate on ETTh1, ETTh2, ETTm1, ETTm2, Weather, Traffic, ECL, Solar, and US Weather (Zhou et al., 2021; Wu et al., 2021; Liu et al., 2022; Darlow et al., 2024)—standard benchmarks in time series work (Ekambaram et al., 2024). Importantly, none of the FMs were pretrained on these datasets,<sup>1</sup> and we evaluate across three standard forecast horizons:  $H = 30, 96, 336$  (Woo et al., 2024; Ekambaram et al., 2024). All experiments use a context length of  $L = 520$ , as is standard for the FMs considered (Ansari et al., 2024). Further experiment details are in Appendix D.

**Metrics** We evaluate performance using Mean Absolute Scaled Error (MASE) (Hyndman & Koehler, 2006), defined for forecast  $\hat{y}$ , context  $x$ , and target  $y$  as

$$\text{MASE}(\hat{y}, y, x) = \frac{L-S}{H} \frac{\sum_{i=1}^H |\hat{y}_i - y_i|}{\sum_{i=1}^{L-S} |x_i - x_{i+S}|}$$

where  $S$  is the seasonality. MASE measures absolute forecast error, normalised by the error of a naive seasonal forecaster on the context, enabling comparison across time series with different scales.

<sup>1</sup>Except TimesFM, which uses Traffic and ECL for training; we therefore omit its results on these two datasets.

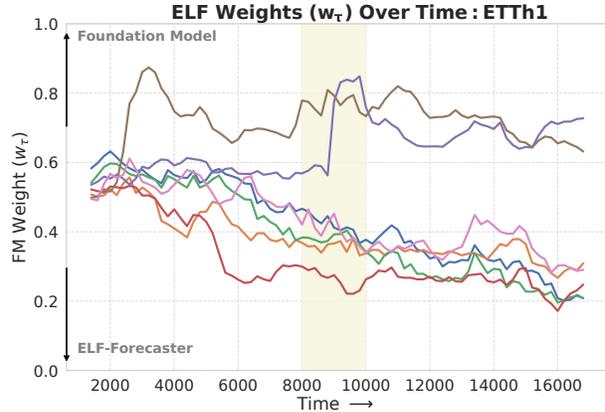


Figure 2. Each line in the plot show the ELF weight ( $w_\tau$ ) over time for the Chronos FM for each channel of the ETTh1 dataset: A weight of 1 means that the ELF-Forecaster has no contribution to the final forecast, similarly, a weight of 0 means that the FM is not contributing to the final forecast. The plot shows that usually the FM weights gradually decrease; this reflects the fact that as the ELF-Forecaster observes more data its performance improves and it is upweighted by the ELF-Weighter. Occasionally, the weights adapt quickly to changes in the underlying time series, for example the purple channel shows a rapid weighting change between steps 8,000-10,000 (shaded in cream).

#### 3.2. Main Results

Table 1 shows the results of applying ELF to FMs. For each FM, we report MASE and the change in MASE when using ELF (the  $+ELF$  columns). A negative value—shown in green—indicates improved performance with ELF. Results are averaged across datasets. As the table shows, ELF improves performance for all FMs. In some cases the gain is substantial—for example, applying ELF to TimesFM yields over a 13% improvement at horizon 336. These results highlight ELF’s ability to leverage online feedback in the rolling window setting to enhance FM forecasts.

**Computational Cost** A core characteristic of ELF is that it is computationally inexpensive. For example, when deploying on two CPUs, ELF adds only an additional 0.38 seconds per update relative to employing the FM without online adaption. This speed is crucial since, during deployment, online updating must occur faster than new data arrives. To contextualise the speed of ELF, we find that ELF is 10x faster than any other online learning method. For example, ELF is 2506x faster than continually finetuning TTM. These results, discussed in detail in Appendix E.5, show the computational efficiency of ELF over other online/continual learning methods.

#### 3.3. Why Does ELF Improve Performance?

While Table 1 demonstrates that ELF improves the performance of FMs, it is important to analyse why this is the case.

Table 1. MASE of time series foundation models with and without using *ELF*: We present results for three forecast horizon lengths denoted as  $H$  in the table, averaging results over numerous datasets. Full table is given in Appendix E

		Time Series FMs									
$H$		TTM	+ELF(↓)	TimesFM	+ELF(↓)	VisionTS	+ELF(↓)	Chronos	+ELF(↓)	Moirai	+ELF(↓)
30		0.974	-0.042	0.970	-0.043	1.099	-0.169	0.962	-0.077	1.094	-0.156
96		1.257	-0.045	1.369	-0.097	1.301	-0.098	1.326	-0.144	1.405	-0.187
336		1.877	-0.045	2.367	-0.311	1.914	-0.084	1.996	-0.182	2.034	-0.195

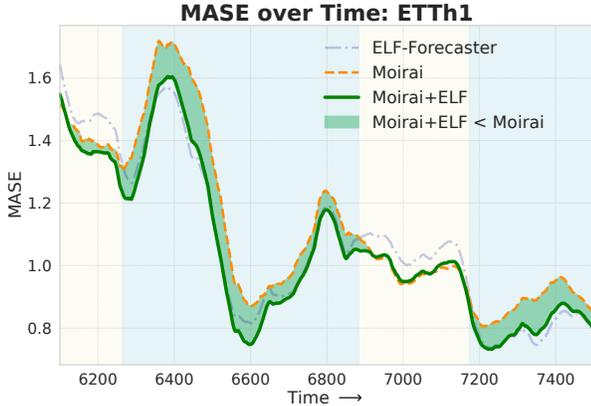


Figure 3. MASEs of the Moirai FM, Moirai+ELF and ELF-Forecaster over time on a snippet from channel 6 of the ETTh1 dataset: The plot shows during certain intervals (shaded in cream) Moirai outperforms the ELF-Forecaster, on other occasions the reverse is true (shaded in light blue). While the ELF-Weighter ensures that the performance of the combined forecast (the green dashed line) generally outperforms either individual forecast. This demonstrates a reason for why using ELF improves performance, where the gain in using it is given by the green shaded region.

We believe that ELF provides a benefit in two main ways: **a)** the ELF-Weighter can identify shifts in data distribution, ensuring that the combined forecast is well suited to the current features of the time series. **b)** By leveraging online feedback the ELF-Forecaster fits to the specific dynamic features of the time series, enabling the combined forecast to more accurately model these features. We evidence both points below.

The ELF-Weighter makes ELF sensitive to the changing data distribution of the time series. This is achieved by the ELF-Weighter quickly adjusting the weighting between the ELF-Forecaster and FM when distribution shifts occur. An example of the weights adjusting to a shift in distribution is shown in Figure 2, which depicts the evolution of the FM weights ( $w_\tau$ ) for Chronos on ETTh1. Specifically, the weight given to the FM for the purple channel rapidly increases in the cream shaded region. Additionally, in Figure 3 we plot a moving average of the MASEs over time of the Moirai FM, the ELF-

Forecaster and the combined Moirai+ELF during a snippet of the ETTh1 dataset. The Figure shows how the ELF-Weighter dynamically weights the forecasts of the ELF-forecaster and the FM based on their performance on the local data distribution. This allows ELF to generate forecasts which are generally superior to either forecaster individually. Notably, Figure 3 also shows that utilising the ELF usually provides a benefit regardless of whether, for the current data distribution, the FM outperforms the ELF-Forecaster (cream shaded regions) or vice versa (light-blue shaded regions). This all provides evidence to the fact that ELF both adjusts to shifts in the data distribution and by doing so increases the accuracy of forecasts.

Figure 2 also shows that for most channels, the FM weight tends to decrease over time. This phenomenon suggests that as the ELF-Forecaster observes more dataset-specific data it generally becomes better fitted to the given time series and is consequently up-weighted. This has the follow-on effect that the FM’s forecast can be increasingly adapted to the characteristics of the time series it has been deployed on.

Additional experiments, ablations and comparisons of ELF with relevant baselines may be found in the Appendix E.

### 4. Conclusions

In this work we look at how to efficiently improve the forecasts of a deployed time series foundation model (FM). We propose *ELF*, a method which exploits the fact in deployment there is online feedback on previous forecasts as new data arrives. ELF leverages this feedback in two ways: **a)** to train a lightweight linear forecaster (ELF-Forecaster) on the newly arriving data to learn the up-to-date data distribution; and **b)** to adapt the FMs forecasts by combining them with the forecasts generated by the ELF-Forecaster using a learnt weighting mechanism—the ELF-Weighter. We demonstrate experimentally that by using *ELF* we improve performance consistently across all datasets and FMs looked at. This indicates that exploiting the online feedback given in deployment is an effective way to boost the performance of FMs. Crucially, this online adaption of forecasts is achieved in a FM-agnostic manner and with a small enough overhead (e.g., see Section 3.2) that it can be widely used in the real world.

## Impact Statement

This paper looks at the general area of time series forecasting. While there are many potential societal consequences of work in time series forecasting, due to the general scope of our work we do not feel there are any specific societal consequences to note here.

## References

- Aljundi, R., Kelchtermans, K., and Tuytelaars, T. Task-free Continual Learning. In *Proceedings of the IEEE/CVF Conference On Computer Vision and Pattern Recognition*, pp. 11254–11263, 2019.
- Ansari, A. F., Stella, L., Turkmen, C., Zhang, X., Mercado, P., Shen, H., Shchur, O., Rangapuram, S., Arango, S. P., Kapoor, S., Zschiegner, J., Robinson, D. M., Wang, H., Mahoney, M., Torkkola, K., Wilson, A., Bohlke-Schneider, M., and Wang, Y. B. Chronos: Learning the Language of Time Series. *Transactions of Machine Learning Research*, 2024.
- Ao, S.-I. and Fayek, H. Continual Deep Learning for Time Series Modeling. *Sensors*, 23(16):7167, 2023.
- Ba, J., Hinton, G. E., Mnih, V., Leibo, J. Z., and Ionescu, C. Using Fast Weights to Attend to the Recent Past. *Proceedings of the Twenty-Ninth Conference on the Advances in Neural Information Processing Systems*, 29, 2016.
- Bai, S., Kolter, J. Z., and Koltun, V. An Empirical Evaluation of Generic Convolutional and Recurrent Networks for Sequence Modeling. *arXiv preprint arXiv:1803.01271*, 2018.
- Besnard, Q. and Ragot, N. Continual Learning for Time Series Forecasting: a First Survey. *Engineering Proceedings*, 68(1):49, 2024.
- Bottou, L. and Cun, Y. Large Scale Online Learning. *Proceedings of the 16th Conference on the Advances in Neural Information Processing Systems*, 2003.
- Cesa-Bianchi, N. and Lugosi, G. *Prediction, Learning, and Games*. Cambridge university press, 2006.
- Cesa-Bianchi, N., Gaillard, P., Lugosi, G., and Stoltz, G. A New Look At Shifting Regret. *arXiv preprint arXiv:1202.3323*, 2012.
- Chaudhry, A., Rohrbach, M., Elhoseiny, M., Ajanthan, T., Dokania, P. K., Torr, P. H., and Ranzato, M. On Tiny Episodic Memories in Continual Learning. *arXiv preprint arXiv:1902.10486*, 2019.
- Chen, M., Pennington, J., and Schoenholz, S. Dynamical Isometry and a Mean Field Theory of RNNs: Gating Enables Signal Propagation in Recurrent Neural Networks. In *Proceedings of the 35th International Conference on Machine Learning*, 2018.
- Chen, M., Shen, L., Li, Z., Wang, X. J., Sun, J., and Liu, C. Visionts: Visual Masked Autoencoders Are Free-lunch Zero-shot Time Series Forecasters. *arXiv preprint arXiv:2408.17253*, 2024.
- Darlow, L., Deng, Q., Hassan, A., Asenov, M., Singh, R., Joosen, A., Barker, A., and Storkey, A. Dam: Towards a Foundation Model for Time Series Forecasting. In *Proceeding of the Twelfth International Conference on Learning Representations*, 2024.
- Das, A., Kong, W., Sen, R., and Zhou, Y. A Decoder-only Foundation Model for Time-series Forecasting. In *Proceedings of the Forty-first International Conference On Machine Learning*, 2024.
- De Lange, M., Aljundi, R., Masana, M., Parisot, S., Jia, X., Leonardis, A., Slabaugh, G., and Tuytelaars, T. A Continual Learning Survey: Defying Forgetting in Classification Tasks. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(7):3366–3385, 2021.
- Diao, Y., Horn, D., Kipf, A., Shchur, O., Benito, I., Dong, W., Pagano, D., Pfeil, P., Nathan, V., Narayanaswamy, B., et al. Forecasting Algorithms for Intelligent Resource Scaling: an Experimental Analysis. In *Proceedings of the 2024 ACM Symposium On Cloud Computing*, pp. 126–143, 2024.
- Dohare, S., Hernandez-Garcia, J. F., Rahman, P., Mahmood, A. R., and Sutton, R. S. Maintaining Plasticity in Deep Continual Learning. *arXiv preprint arXiv:2306.13812*, 2023.
- Ekambaram, V., Jati, A., Nguyen, N., Sinthong, P., and Kalagnanam, J. Tsmixer: Lightweight Mlp-mixer Model for Multivariate Time Series Forecasting. In *Proceedings of the 29th ACM Sigkdd Conference On Knowledge Discovery and Data Mining*, pp. 459–469, 2023.
- Ekambaram, V., Jati, A., Dayama, P., Mukherjee, S., Nguyen, N. H., Gifford, W. M., Reddy, C., and Kalagnanam, J. Tiny Time Mixers (TTMs): Fast Pre-trained Models for Enhanced Zero/few-shot Forecasting of Multivariate Time Series. *CoRR*, 2024.
- Godahewa, R. W., Bergmeir, C., Webb, G. I., Hyndman, R., and Montero-Manso, P. Monash time series forecasting archive. In *Proceedings of the Thirty-fifth Conference on the Advances in Neural Information Processing Systems, Datasets and Benchmarks Track*, 2021.

- He, K., Chen, X., Xie, S., Li, Y., Dollár, P., and Girshick, R. Masked Autoencoders are Scalable Vision Learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 16000–16009, 2022.
- Hoi, S. C., Sahoo, D., Lu, J., and Zhao, P. Online Learning: a Comprehensive Survey. *Neurocomputing*, 459:249–289, 2021.
- Hyndman, R. J. and Koehler, A. B. Another Look At Measures of Forecast Accuracy. *International Journal of Forecasting*, 22(4):679–688, 2006.
- Jadbabaie, A., Rakhlin, A., Shahrampour, S., and Sridharan, K. Online Optimization: Competing with Dynamic Comparators. In *Proceedings of the Eighteenth Conference on Artificial Intelligence and Statistics*, pp. 398–406, 2015.
- Joosen, A., Hassan, A., Asenov, M., Singh, R., Darlow, L., Wang, J., and Barker, A. How Does It Function? Characterizing Long-term Trends in Production Serverless Workloads. In *Proceedings of the 2023 ACM Symposium On Cloud Computing*, pp. 443–458, 2023.
- Joosen, A., Hassan, A., Asenov, M., Singh, R., Darlow, L., Wang, J., Deng, Q., and Barker, A. Serverless Cold Starts and Where to Find Them. *arXiv preprint arXiv:2410.06145*, 2024.
- Kim, H., Kim, S., Mok, J., and Yoon, S. Battling the Non-Stationarity in Time Series Forecasting via Test-Time Adaptation. In *Proceedings of the 39th Annual AAAI Conference on Artificial Intelligence*, 2025.
- Kim, T., Kim, J., Tae, Y., Park, C., Choi, J.-H., and Choo, J. Reversible Instance Normalization for Accurate Time-Series Forecasting Against Distribution Shift. In *Proceedings of The Ninth International conference on learning representations*, 2021.
- Kirkpatrick, J., Pascanu, R., Rabinowitz, N., Veness, J., Desjardins, G., Rusu, A. A., Milan, K., Quan, J., Ramalho, T., Grabska-Barwinska, A., et al. Overcoming Catastrophic Forgetting in Neural Networks. *Proceedings of the National Academy of Sciences*, 114(13):3521–3526, 2017.
- Kumaran, D., Hassabis, D., and McClelland, J. L. What Learning Systems Do Intelligent Agents Need? Complementary Learning Systems Theory Updated. *Trends in Cognitive Sciences*, 20(7):512–534, 2016.
- Lee, T. L. and Storkey, A. Approximate Bayesian Class-conditional Models Under Continuous Representation Shift. In *Proceeding of the Twenty-Second International Conference On Artificial Intelligence and Statistics*, pp. 3628–3636, 2024a.
- Lee, T. L. and Storkey, A. Chunking: Continual Learning Is Not Just About Distribution Shift. In *Proceedings of the Third Conference On Lifelong Learning Agents*, 2024b.
- Liang, Y., Wen, H., Nie, Y., Jiang, Y., Jin, M., Song, D., Pan, S., and Wen, Q. Foundation Models for Time Series Analysis: a Tutorial and Survey. In *Proceedings of the 30th ACM Sigkdd Conference On Knowledge Discovery and Data Mining*, pp. 6555–6565, 2024.
- Liu, S., Yu, H., Liao, C., Li, J., Lin, W., Liu, A. X., and Dustdar, S. Pyraformer: Low-complexity Pyramidal Attention for Long-range Time Series Modeling and Forecasting. In *Proceedings of the Tenth International Conference On Learning Representations*, 2022.
- McClelland, J. L., McNaughton, B. L., and O’Reilly, R. C. Why There Are Complementary Learning Systems in the Hippocampus and Neocortex: Insights From the Successes and Failures of Connectionist Models of Learning and Memory. *Psychological review*, 102(3):419, 1995.
- Miller, J. A., Aldosari, M., Saeed, F., Barna, N. H., Rana, S., Arpinar, I. B., and Liu, N. A Survey of Deep Learning and Foundation Models for Time Series Forecasting. *arXiv preprint arXiv:2401.13912*, 2024.
- Nie, Y., Nguyen, N. H., Sinthong, P., and Kalagnanam, J. A Time Series Is Worth 64 Words: Long-term Forecasting with Transformers. In *The Eleventh International Conference on Learning Representations*, 2022.
- Ostapenko, O., Lesort, T., Rodriguez, P., Arefin, M. R., Douillard, A., Rish, I., and Charlin, L. Continual Learning with Foundation Models: an Empirical Study of Latent Replay. In *Proceedings of the First Conference On Lifelong Learning Agents*, pp. 60–91. PMLR, 2022.
- Pham, Q., Liu, C., Sahoo, D., and Hoi, S. C. Learning Fast and Slow for Online Time Series Forecasting. *arXiv preprint arXiv:2202.11672*, 2022.
- Pham, Q., Liu, C., Sahoo, D., and Hoi, S. Learning Fast and Slow for Online Time Series Forecasting. In *Proceedings of The Eleventh International Conference on Learning Representations*, 2023.
- Polikar, R., Upda, L., Upda, S. S., and Honavar, V. Learn++: an Incremental Learning Algorithm for Supervised Neural Networks. *IEEE transactions on Systems, Man, and Cybernetics, part C (applications and reviews)*, 31(4): 497–508, 2001.
- Qu, H., Rahmani, H., Xu, L., Williams, B., and Liu, J. Recent Advances of Continual Learning in Computer Vision: An Overview. *arXiv preprint arXiv:2109.11369*, 2021.

- Rakhlín, S. and Kleiner, A. Online Learning: Halving Algorithm and Exponential Weights. *UC Berkeley, CS281B/Stat241B (Spring 2008) Statistical Learning Theory Lecture Notes*, 2008.
- Rasul, K., Ashok, A., Williams, A. R., Khorasani, A., Adamopoulos, G., Bhagwatkar, R., Biloš, M., Ghonia, H., Hassen, N., Schneider, A., et al. Lag-llama: Towards Foundation Models for Time Series Forecasting. In *R0-fomo: Robustness of Few-shot and Zero-shot Learning in Large Foundation Models*, 2023.
- Roberts, A., Raffel, C., Lee, K., Matena, M., Shazeer, N., Liu, P. J., Narang, S., Li, W., and Zhou, Y. Exploring the Limits of Transfer Learning with a Unified Text-to-text Transformer. *Google, Tech. Rep.*, 2019.
- Toner, W. and Darlow, L. N. An Analysis of Linear Time Series Forecasting Models. In *Proceeding of the Forty-first International Conference On Machine Learning*, 2024.
- Wang, L., Zhang, X., Su, H., and Zhu, J. A Comprehensive Survey of Continual Learning: Theory, Method and Application. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- Welford, B. P. Note On a Method for Calculating Corrected Sums of Squares and Products. *Technometrics*, 4(3): 419–420, 1962.
- Woo, G., Liu, C., Kumar, A., Xiong, C., Savarese, S., and Sahoo, D. Unified Training of Universal Time Series Forecasting Transformers. In *Proceedings of The Forty-First International Conference On Machine Learning*, 2024.
- Woodbury, M. A. *Inverting Modified Matrices*. Department of Statistics, Princeton University, 1950.
- Wu, H., Xu, J., Wang, J., and Long, M. Autoformer: Decomposition Transformers with Auto-correlation for Long-term Series Forecasting. *Proceedings of the Thirty-Fourth Conference on the Advances in Neural Information Processing Systems*, pp. 22419–22430, 2021.
- Wu, T., Luo, L., Li, Y.-F., Pan, S., Vu, T.-T., and Haffari, G. Continual Learning for Large Language Models: a Survey. *arXiv preprint arXiv:2402.01364*, 2024.
- Xu, Z., Zeng, A., and Xu, Q. FITS: Modeling Time Series with 10k Parameters. In *Proceeding of the Twelfth International Conference On Learning Representations*, 2023.
- Yang, Y., Zhou, J., Ding, X., Huai, T., Liu, S., Chen, Q., Xie, Y., and He, L. Recent Advances of Foundation Language Models-based Continual Learning: a Survey. *ACM Computing Surveys*, 2024.
- Zeng, A., Chen, M., Zhang, L., and Xu, Q. Are Transformers Effective for Time Series Forecasting? In *Proceedings of the Thirty-Seventh AAAI conference on artificial intelligence*, pp. 11121–11128, 2023.
- Zhang, Y., Wen, Q., wang, x., Chen, W., Sun, L., Zhang, Z., Wang, L., Jin, R., and Tan, T. OneNet: Enhancing Time Series Forecasting Models Under Concept Drift by Online Ensembling. In *Proceedings of the Thirty-Seventh Conference on the Advances in Neural Information Processing Systems*, 2023.
- Zhang, Y., Chen, W., Zhu, Z., Qin, D., Sun, L., Wang, X., Wen, Q., Zhang, Z., Wang, L., and Jin, R. Addressing Concept Shift in Online Time Series Forecasting: Detect-then-adapt. *arXiv preprint arXiv:2403.14949*, 2024.
- Zhao, P., Zhang, Y.-J., Zhang, L., and Zhou, Z.-H. Dynamic Regret of Convex and Smooth Functions. *Proceedings of the Thirty-Third Conference on the Advances in Neural Information Processing Systems*, pp. 12510–12520, 2020.
- Zhou, H., Zhang, S., Peng, J., Zhang, S., Li, J., Xiong, H., and Zhang, W. Informer: Beyond Efficient Transformer for Long Sequence Time-series Forecasting. In *Proceedings of the Thirty-Fifth AAAI Conference On Artificial Intelligence*, pp. 11106–11115, 2021.

## A. Notation

We list the notation used in this paper below. For notational simplicity, *we only describe the univariate case*. This is when each value in the time series is a scalar. This simplification is without loss of generality, as ELF forecasts each dimension of the time series, called *channels*, separately—i.e. it is channel independent.

- $L$ : Context length (number of time steps in the input sequence).
- $H$ : Forecast horizon (number of future time steps to predict).
- $c$ : Number of channels (distinct time series).
- $\mathbf{x}$ : Context window,  $\mathbf{x} \in \mathbb{R}^L$ .
- $M$ : The number of time steps between subsequent updating of ELF.
- $t$ : Current time step.
- $\tau$ : Update Step, number of times forecaster has been updated using online feedback. Given by  $\lfloor \frac{t}{M} \rfloor$ .
- $\mathbf{y}, \hat{\mathbf{y}}$ : Target and forecast respectively,  $\mathbf{y}, \hat{\mathbf{y}} \in \mathbb{R}^H$ .
- $X, Y$ : *Design* matrices containing all observed context and target vectors respectively up to the current time step.  $\tilde{X}, \tilde{Y}$  Fourier domain representations of the design matrices.
- $\text{DFT}, \text{RFT}$ : Discrete Fourier Transform and Real Fourier Transform respectively where

$$\text{DFT}(\mathbf{x})_k := \frac{1}{\sqrt{L}} \sum_{n=0}^{L-1} x_n e^{-\frac{2i\pi kn}{L}}.$$

The RFT is defined by taking the first  $\frac{L}{2} + 1$  components of the DFT.

## B. Related Work

Currently, the main paradigm to construct (zero-shot) time series FMs is to collect a large pretraining set of time series data and then use it to learn an LLM-like transformer model (Rasul et al., 2023; Chen et al., 2024; Liang et al., 2024). For example, *Chronos* (Ansari et al., 2024), *Moirai* (Woo et al., 2024) and *TimesFM* (Das et al., 2024) are all time series FMs which are trained on large curated pretraining sets of time series, consisting of billions of training points, and whose backbones consist of LLM-based transformer architectures—such as Chronos, which uses the T5 architecture (Roberts et al., 2019). Also, recently there have been new time series FMs which have gone against this trend by not using LLM architectures as their backbones. For instance, *TTM* (Ekambaram et al., 2024) uses the TSMixer architecture (Ekambaram et al., 2023) as its backbone, which is specific to time series, resulting in a much smaller model size when compared to methods using LLM backbones. While, *VisionTS* (Chen et al., 2024) uses a masked autoencoder (He et al., 2022) as its backbone and does not use time series data for pretraining, instead using images from the ImageNet dataset.

A major focus of this work is the exploitation of online feedback available at the deployment stage of a time series forecaster. The idea of leveraging online feedback in deployment to improve performance of an ML system has a long history (Hoi et al., 2021; Polikar et al., 2001; Bottou & Cun, 2003). Currently, this concept falls within the domain of continual or lifelong learning for deep learning methods (De Lange et al., 2021; Wang et al., 2024). Some of these works, for instance, investigate how to update a model online given the newly available data, which is either from the same distribution or from a shifting distribution (Aljundi et al., 2019; Lee & Storkey, 2024b). Importantly, much of the research on continual learning has focused on vision or text tasks (Qu et al., 2021; Wu et al., 2024), with comparatively little attention given to the time series domain (Besnard & Ragot, 2024). The studies that have explored continual learning for time series forecasting concentrate on methods for updating the weights of deep learning models (Ao & Fayek, 2023; Pham et al., 2022; Zhang et al., 2024). This has two problems in the context of time series: **a**) updating the weights of a deep learning model, especially of the size of a FM, at the frequency often required for time series data and with the resources usually available (e.g. CPUs) can often make such methods infeasible to use in practice (Diao et al., 2024; Ekambaram et al., 2024). And **b**) online updating of deep models suffers from the problems of catastrophic forgetting and plasticity loss (Kirkpatrick et al., 2017; Dohare et al., 2023; De Lange et al., 2021). Solutions to this currently require re-training on large amounts of historic data and complex, model-specific learning routines (Yang et al., 2024). This is in contrast to the focus of our work, which looks at the efficient online adaption of FM forecasts, so that it can be widely used in the real world.

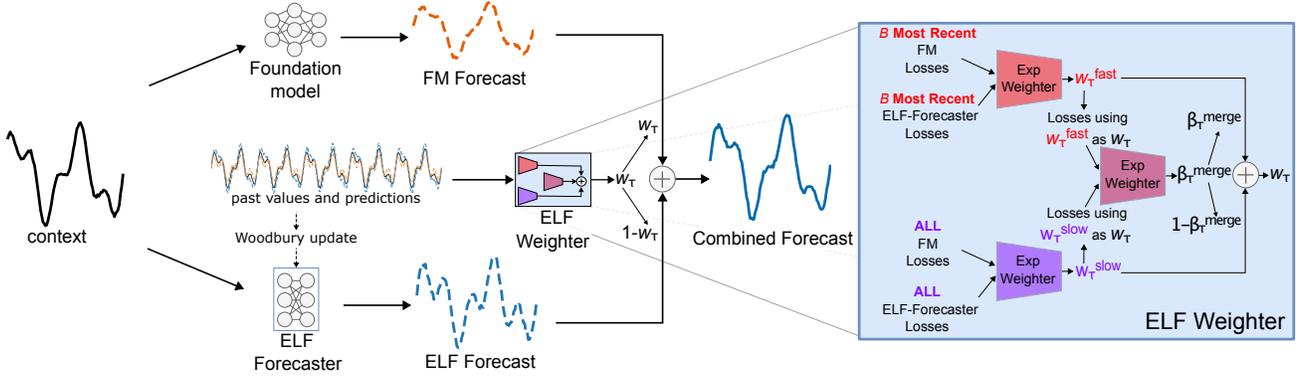


Figure 4. **Forecast construction for FM+ELF**: The left side of the figure shows how ELF adjusts the forecast of the FM. This is achieved by combining the FM forecast with the forecasts of the online (Woodbury) updated ELF-Forecaster using a weighted average. The weights  $w_T$  in the weighted average are determined by the ELF-Weighter based on previous performance of the FM and ELF-Forecaster. The schematic in the blue box to the right, zooms into the components of the ELF-Weighter: the fast, slow and merge weighters. Where the fast weighter gives a weighting based on recent performance; the slow weighter gives a weighting based on performance across the whole history. The merge weighter is used to combine the weights given by the fast and slow weighters. Each weighter uses exponential weighting to construct their weights; the difference being the losses used as input. While the slow weighter can be seen as using all previous losses to compute its weight, we note that only the last  $B$  losses need to be stored by ELF.

## C. Additional Methodological Details for ELF

### C.1. Implementation Details of the ELF-Forecaster

**Initialisation** Initially there is no data to fit ELF-Forecaster since we assume that we are deploying zero-shot without access to a training dataset. Consequently, we are required to wait a small amount of time before the ELF-Forecaster can first be fit to data. To handle this period we initialise the linear model to the naive seasonal forecaster.

**Instance Norm** The ELF-Forecaster utilises a variant of instance norm at inference time. Given a context vector  $\mathbf{x}$  and a target vector  $\mathbf{y}$ , and a forecast model  $f$ , this involves normalising  $\mathbf{x}$  by its mean  $\mu(\mathbf{x})$  applying a model  $f$  on the normalised  $\mathbf{x}'$ , and adding this mean back onto the prediction  $\hat{\mathbf{y}}$ . Formally;

$$\begin{aligned}\mathbf{x}' &= \mathbf{x} - \mu(\mathbf{x}), \\ \hat{\mathbf{y}} &= f(\mathbf{x}'), \\ \hat{\mathbf{y}}_{\text{out}} &= \hat{\mathbf{y}} + \mu(\mathbf{x}).\end{aligned}$$

#### C.1.1. NUMERICAL ISSUES AND RESOLUTIONS

The naive approach for handling the repeated refitting of the ELF-Forecaster is to store  $X^T X$  and  $X^T Y$ . As one observes new contexts and targets these quantities can be updated via;

$$\begin{aligned}X^T X &\mapsto X^T X + X_M^T X_M, \\ X^T Y &\mapsto X^T Y + X_M^T Y_M.\end{aligned}$$

After which one may recompute  $(X^T X + \lambda I)^{-1} X^T Y$  to produce the updated weight matrix. While this approach is effective and requires only the storage of  $L \times L$  and  $L \times H$  matrices, one must take care that the cumulative sums  $X^T X, X^T Y$  don't grow too large. For example, in the context of serverless computing practitioners are often interested in predicting function requests. The number of these requests can sometimes be in the millions per hour (Joosen et al., 2023; Diao et al., 2024). Consequently, in this setting, over the course of a year the values of  $X^T X$  will grow to be in the order of  $10^{17}$ . Using, say, 32-bit float the large growth in the magnitude of the elements of  $X^T X$  can result in a loss of numerical precision. To address this issue we adopt a subtly different approach, instead storing  $\frac{X^T X}{N}, \frac{X^T Y}{N}$  where  $N$  is the number of data instances which have been observed thus far. This ensures that the magnitude of the values in these matrices remains approximately constant.

Specifically, given  $M$  new data instances  $X_M, Y_M$  one updates  $\frac{X^T X}{N}$  in the following way:

$$\frac{X^T X}{N} \mapsto \frac{N}{N+M} \left( \frac{X^T X}{N} \right) + \frac{X_M^T X_M}{N+M}.$$

The update is similar for  $\frac{X^T Y}{N}$ .

We then observe that

$$(X^T X + \lambda I)^{-1} X^T Y = \left( \frac{X^T X}{N} + \frac{\lambda}{N} I \right)^{-1} \frac{X^T Y}{N}.$$

Thus, we can compute the OLS solution using the scaled quantities  $\frac{X^T X}{N}, \frac{X^T Y}{N}$ , annealing the regularisation parameter  $\lambda$  by scaling by  $\frac{1}{N}$  as we see more data.

**Data Scaling** Typically, when training deep models on time series, practitioners adopt the approach of normalising the data. The standard approach is to compute the mean and the standard deviation of each series on some training set and then scale so that the data is zero mean and unit variance (Nie et al., 2022). The validation and test data are scaled using these same parameters derived from the training set. This technique handles the radically different scales between different time series, and mirrors data standardisation practices in other areas of machine learning such as computer vision. In an online setting however we assume that there is no training dataset from which these metrics can be computed. Thus we cannot adopt this approach. We resolve this by computing a running standard deviation for each channel which are updated online as more data is observed using Welford’s online algorithm (Welford, 1962). These values are used to scale the data before fitting the linear model. Note that, at inference time, no data scaling is needed before applying the linear model since  $\alpha A \left( \frac{x}{\alpha} \right) = Ax$  for any  $\alpha$ .

### C.1.2. HOW DOES THE ELF-FORECASTER DIFFER FROM FITS?

Our ELF-Forecaster architecture is inspired by the FITS linear forecast model; an effective lightweight approach for time series forecasting (Xu et al., 2023). FITS applies the Real Fourier Transform (RFT) to a context vector, removes high frequency components using a low-pass filter (LPF) and then takes the inverse RFT to map back into the time domain. This structure is similar to that of the ELF-Forecaster, however there are some important differences between our ELF-Forecaster and FITS, some of which we summarise below:

1. **Model Fitting:** While FITS is fit using gradient descent, ELF uses a closed-form solution to find the complex weight matrix.
2. **Model Output:** FITS outputs a forecast of the target and a reconstruction of the context vector, whereas ELF only generates a target.
3. **Loss Function:** FITS is trained to minimise both the reconstruction error and forecast error where we only consider forecast error.
4. **Target Compression:** FITS uses a low-pass filter to compress the context vector. ELF applies an LPF to the context and target.
5. **Online Learning:** Our method is designed for online learning whereas FITS considers exclusively the non-online setting.

**Relation To Standard Linear Regression** When FITS does not use a LPF and the context length exceeds the prediction horizon length, it is known that it is equivalent to ordinary least-squares linear regression (Toner & Darlow, 2024). Similarly, in the case where our model applies no compression to the target or the context it will also be equivalent to ordinary least-squares linear regression.

### C.2. Fitting and Forecasting Algorithms

We present here the algorithms which form the ELF-Forecaster. Algorithm 1 describes how the ELF-Forecaster generates a forecast given an input context vector  $x \in \mathbb{R}^L$ . Algorithm 2 describes how the ELF-Forecaster is refit at update step  $\tau$  (i.e. after  $\tau M$  time steps). We note that fitting cannot begin until at least  $L + H$  time steps have elapsed giving us at least one training example upon which to fit. In some cases  $L + H$  may exceed  $M$ . In these settings we set the ELF-Forecaster to be the naive seasonal forecaster until  $\tau M > L + H$ .

**Algorithm 1** Predicting with ELF-Forecaster

---

**Input:** Context vector  $\mathbf{x} = (x_1, x_2, \dots, x_L)$ , forecast horizon  $H$ , frequency retention proportion  $\alpha \in [0, 1]$ , complex weight matrix  $W \in \mathbb{C}^{\tilde{L} \times \tilde{H}}$ , where  $\tilde{L} := \lfloor \alpha L \rfloor$  and  $\tilde{H} := \lfloor \alpha H / 2 \rfloor$ .

Compute mean of input:  $\mu := \frac{1}{L} \sum_{i=0}^{L-1} x_i$

Normalise data:  $\mathbf{x} \leftarrow \mathbf{x} - \mu$

Apply discrete Fourier transform (DFT):  $\mathbf{x} \leftarrow \text{DFT}(\mathbf{x})$

Discard high-frequency components by removing the central portion of  $\mathbf{x}$ :

$$\mathbf{x} \leftarrow (x_1, x_2, \dots, \underbrace{x_{\frac{\alpha L}{2}}, \dots, x_{L - \frac{\alpha L}{2}}}_{\text{Remove } L - \lfloor \alpha L \rfloor \text{ components}}, \dots, x_L)$$

Apply linear map:  $\hat{\mathbf{y}} \leftarrow \mathbf{x}^T W$

Pad forecast with zeros to length  $H/2 + 1$ :

$$\hat{\mathbf{y}} \leftarrow (\hat{y}_1, \dots, \hat{y}_{\tilde{H}}, 0, \dots, 0) \in \mathbb{C}^{H/2+1}$$

Apply inverse real Fourier transform (iRFT):  $\hat{\mathbf{y}} \leftarrow \text{iRFT}(\hat{\mathbf{y}})$

Restore mean:  $\hat{\mathbf{y}} \leftarrow \hat{\mathbf{y}} + \mu$

**Return** Forecast vector  $\hat{\mathbf{y}} \in \mathbb{R}^H$

---

### C.3. ELF-Weighter Algorithms

We present here the two algorithms which form the ELF-Weighter. Algorithm 4, shows how ELF-Weighter ELF the FM forecast by combining it with the ELF-Forecaster forecast using a weighted average. While Algorithm 5 shows how the ELF-Weighter uses exponential weighting to update the weights of the fast, slow and merge weighters which construct the weights  $w_\tau$  used to combine the FM and ELF-Forecaster forecasts.

**Algorithm 2** Fitting of ELF-Forecaster

**Input:** Update step  $\tau$ , refit interval  $M = 200$ ; context length  $L$ ; forecast horizon  $H$ ; the last  $M + L + H$  time steps of a time series  $\{x_i\}_{i=(\tau-1)M-L-H}^{\tau M-1}$ ; frequency retention proportion  $\alpha \in [0, 1]$ ; regularisation parameter  $\lambda = 20$ ; number of datapoints observed so far NumSeen; boolean flag FIRSTFIT (TRUE if the model has not yet been fit)

Denote

$$\mathbf{x}_s := (x_s, x_{s+1}, \dots, x_{s+L-1}) \quad \mathbf{y}_s := (x_{s+L}, x_{s+L+1}, \dots, x_{s+L+H-1})$$

Gather the last  $M$  context and target vectors  $\mathcal{D} := \{\mathbf{x}_s, \mathbf{y}_s\}_{s=\tau M-L-H}^{\tau M-L-H}$ .

Form matrices  $X \in \mathbb{R}^{M \times L}$  and  $Y \in \mathbb{R}^{M \times H}$  from  $\mathcal{D}$ .

Normalise  $X \leftarrow X - \text{mean}(X, \text{axis} = 1)$

// Normalise rows to have zero mean

**if** FIRSTFIT **then**

$\sigma \leftarrow \text{stdev}(X, \text{dim} = 1)$

// Calculate initial standard deviation per feature

**else**

$\sigma \leftarrow \text{WELFORD}(X, \sigma)$

// Update standard deviation online

**end if**

$X \leftarrow X / \sigma$

// Scale data using standard deviation for numerical stability

// Transform to frequency domain

$\tilde{X} \leftarrow \text{DFT}(X)$

// Apply row-wise discrete Fourier transform

$\tilde{Y} \leftarrow \text{RFT}(Y)$

// Apply row-wise real Fourier transform

// Reduce dimensionality of  $\tilde{X}, \tilde{Y}$

Remove the last  $\frac{H}{2} - \lfloor \frac{\alpha H}{2} \rfloor$  columns of  $\tilde{Y}$

// Low-pass on RFT output (ordered low-to-high)

Remove the *middle*  $L - \lfloor \alpha L \rfloor$  columns of  $\tilde{X}$

// Low-pass on DFT output (high freqs in middle)

**if** FIRSTFIT **then**

$$A^{-1} \leftarrow \left( \frac{\tilde{X}^* \tilde{X} + \lambda I}{M} \right)^{-1}$$

$$B \leftarrow \frac{1}{M} \tilde{X}^* \tilde{Y}$$

FIRSTFIT  $\leftarrow$  FALSE

**else**

// Apply complex-valued Woodbury update rule

$$A^{-1} \leftarrow \text{WOODBURYUPDATE} \left( \frac{A^{-1}}{\text{NumSeen}}, \tilde{X} \right)$$

// Update  $A^{-1}$  efficiently; see Alg. 3

$$A^{-1} \leftarrow A^{-1} \cdot (\text{NumSeen} + M)$$

// Rescale updated  $A^{-1}$

$$B \leftarrow \frac{1}{\text{NumSeen} + M} (\text{NumSeen} \cdot B + \tilde{X}^* \tilde{Y})$$

// Update  $B$  via weighted average

**end if**

Update counter: NumSeen  $\leftarrow$  NumSeen +  $M$

Set the complex weight matrix  $W \leftarrow A^{-1} B$

**Algorithm 3** Complex-Valued Woodbury Update (Woodbury, 1950)

**Function:** WOODBURYUPDATE( $A^{-1}, X$ )

**Input:**  $A^{-1} \in \mathbb{C}^{d \times d}$  (inverse of a  $d \times d$  matrix),  $X \in \mathbb{C}^{M \times d}$

Compute the intermediate matrix:

$$B \leftarrow A^{-1} X^* (I + X A^{-1} X^*)^{-1} X A^{-1}$$

Update inverse:

$$A^{-1} \leftarrow A^{-1} - B$$

**Return** updated inverse matrix  $A^{-1}$

---

**Algorithm 4** ELF-Weighter Combined Forecasts at Update Step  $\tau$

---

**Input:**  $\hat{\mathbf{y}}_{t,FM}$  and  $\hat{\mathbf{y}}_{t,EF}$ , which are the forecasts of the FM and ELF-Forecaster for time  $t$ , respectively, and let the last update step be update step  $\tau$

Compute weight:

$$w_\tau = \beta_\tau^{merge} w_\tau^{fast} + (1 - \beta_\tau^{merge}) w_\tau^{slow}$$

Compute and return ELF's forecasts:

**Return**  $w_\tau \hat{\mathbf{y}}_{t,FM} + (1 - w_\tau) \hat{\mathbf{y}}_{t,EF}$

---



---

**Algorithm 5** ELF-Weighter Update at Update Step  $\tau$

---

**Input:**  $\hat{Y}_{\tau,FM}$  and  $\hat{Y}_{\tau,EF}$ ; the  $M \times H$  matrices containing as rows the  $M$  rolling forecasts of the FM and ELF-Forecaster for update step  $\tau$ , respectively; and,  $X_\tau, Y_\tau$  the  $M \times L$  and  $M \times H$  matrices containing the true values for the contexts and forecasts for update step  $\tau$ , respectively.

Compute losses for update step  $\tau$  (we use average MASE over the last  $M$  time steps for the loss function):

$$\text{Loss}_{\tau,1} = \text{Compute\_Average\_MASE}(\hat{Y}_{\tau,FM}, Y_\tau, X_\tau)$$

$$\text{Loss}_{\tau,2} = \text{Compute\_Average\_MASE}(\hat{Y}_{\tau,EF}, Y_\tau, X_\tau)$$

$$\text{Loss}_{\tau,s} = \text{Compute\_Average\_MASE}(w_{\tau-1}^{slow} \hat{Y}_{\tau,FM} + (1 - w_{\tau-1}^{slow}) \hat{Y}_{\tau,EF}, Y_\tau, X_\tau)$$

$$\text{Loss}_{\tau,f} = \text{Compute\_Average\_MASE}(w_{\tau-1}^{fast} \hat{Y}_{\tau,FM} + (1 - w_{\tau-1}^{fast}) \hat{Y}_{\tau,EF}, Y_\tau, X_\tau)$$

Update slow weighter:

$$w_\tau^{slow} = \frac{w_{\tau-1}^{slow} e^{-\eta \text{Loss}_{\tau,1}}}{w_{\tau-1}^{slow} e^{-\eta \text{Loss}_{\tau,1}} + (1 - w_{\tau-1}^{slow}) e^{-\eta \text{Loss}_{\tau,2}}}$$

Update fast weighter:

$$w_\tau^{fast} = \frac{e^{-\eta \sum_{\tau'=\tau-B}^{\tau} \text{Loss}_{\tau',1}}}{\sum_{j=1}^2 e^{-\eta \sum_{\tau'=\tau-B}^{\tau} \text{Loss}_{\tau',j}}}$$

Update merge weighter:

$$\beta_\tau^{merge} = \frac{\beta_{\tau-1}^{merge} e^{-\eta \text{Loss}_{\tau,f}}}{\beta_{\tau-1}^{merge} e^{-\eta \text{Loss}_{\tau,f}} + (1 - \beta_{\tau-1}^{merge}) e^{-\eta \text{Loss}_{\tau,s}}}$$


---

## D. Hyperparameters and Additional Experiment Details

There are a few additional details to mention about our experiments. First, there are the hyperparameter values used for ELF. These are chosen *a priori* and are the same across all of our experiments. This is due to the fact in the rolling window setting it is not possible to fix hyperparameters before evaluating/deploying the forecaster. For the ELF-Forecaster the parameter values are  $\lambda = 20$  and  $\alpha = 0.9$ . For the ELF-Weighter the hyperparameters are  $\eta = 0.5$  for all weighters and  $B = 5$  update steps. Second, at the start of deployment the ELF-Forecaster has insufficient data to give accurate forecasts therefore we have a warm-up period of 5 update steps where it is not used in the combined forecast. Last, in Table 2 we present the seasonalities used to calculate the MASE and RMSSE scores for each dataset along with some general dataset statistics—number of channels and time steps.

Table 2. Dataset statistics and the seasonalities used for each dataset in the computation of MASE

Dataset	Seasonality	#Channels	#Time Steps
ETTh1	24	7	17420
ETTh2	24	7	17420
ETTm1	96	7	69680
ETTm2	96	7	69680
US Weather	24	12	35064
Weather	144	21	52696
Solar	24	88	12840
ECL	24	321	26304
Traffic	24	862	17544
Wind-PerSec	60	1	86400
Solar-PerSec	60	1	86400
Cloud-PerSec	240	11	86400

**Details of FMs** For each of the FMs looked at, we have aimed to use the same configurations as in the original works. However, there are some necessary changes we needed to make. First, both TTM and TimesFM are trained using a context length of 512 and so in our experiments we remove the first 8 values of each 520-long context before giving it to TTM or TimesFM. Also, the currently released models for TTM only predict to a maximum horizon length of 96. Hence to forecast with TTM using a horizon length of 336 we auto-regressively feed-in the constructed forecast back into TTM to generate longer forecasts. This is the same technique as done in the paper proposing TTM (Ekambaram et al., 2024).

**Details of Online Adaption Methods, TAFAS, OneNet and FSNet** As for the FMs, for the online adaption methods we look at, we have aimed to keep their configuration the same as in the original works. Specifically, this means that for each method we have a training step, unlike ELF, which happens after seeing 2000 time steps. Before this training step each method is uninitialised, so we use the naive seasonal forecaster to give forecasts for each method before the training step. Then at the training step we do batch training with the on the first 2000 time steps of the dataset to initialise the methods. After this the methods are trained online like ELF, where for TAFAS we set  $M = 200$  to make it as comparable to ELF as possible. While, given how different OneNet, OneNet-TTM and FSNet are to ELF we set  $M = 1$  for these three methods as in the original work to maximise their performance (Zhang et al., 2023; Pham et al., 2023). Additionally, as we are in the rolling window setting we cannot normalise the data head of time as in the original works proposing TAFAS, OneNet and FSNet, instead we use RevIn (Kim et al., 2021) with each method to standardise the data in our experiments. Additionally, there are a few more details for TAFAS. One being that we do not use *Prediction Adjustment*. This is because in our setting we assume the forecasts cannot be modified after they have been given, as in the real-world they are often used immediately for decision making. While the other is that for TTM we use the both gated calibration modules for all datasets bar Solar and Traffic, while for the other FMs and for Solar and Traffic for TTM we only use the output gated calibration module due to GPU Memory constraints we had while performing the experiments.

Table 3. MASE of time series foundation models with and without using *ELF*: A lower MASE is better and we present results for each dataset over multiple forecast horizon lengths denoted as  $H$  in the table. The results show that by using *ELF* we improve performance across all datasets and forecast lengths tested.

Dataset	$H$	Time Series FMs									
		TTM	$+ELF(\downarrow)$	TimesFM	$+ELF(\downarrow)$	VisionTS	$+ELF(\downarrow)$	Chronos	$+ELF(\downarrow)$	Moirai	$+ELF(\downarrow)$
ETTh1	30	0.930	-0.019	0.913	-0.022	0.967	-0.063	0.936	-0.047	1.010	-0.089
	96	1.081	-0.014	1.107	-0.049	1.084	-0.028	1.120	-0.063	1.168	-0.086
	336	1.286	-0.006	1.350	-0.062	1.306	-0.022	1.361	-0.074	1.417	-0.101
ETTh2	30	1.472	-0.018	1.470	-0.024	1.542	-0.071	1.455	-0.021	1.536	-0.058
	96	2.786	-0.016	2.799	-0.040	2.787	-0.029	2.801	-0.047	2.863	-0.062
	336	6.802	-0.011	6.816	-0.040	6.763	-0.008	6.850	-0.092	6.913	-0.105
ETThm1	30	0.802	-0.048	0.833	-0.079	1.021	-0.252	0.891	-0.139	1.078	-0.311
	96	0.973	-0.053	1.016	-0.097	1.050	-0.130	1.164	-0.243	1.239	-0.310
	336	1.205	-0.063	1.276	-0.131	1.216	-0.077	1.489	-0.341	1.479	-0.327
ETThm2	30	0.799	-0.036	0.814	-0.057	1.040	-0.251	0.843	-0.085	0.946	-0.164
	96	0.991	-0.038	1.029	-0.077	1.088	-0.124	1.107	-0.150	1.151	-0.180
	336	1.320	-0.040	1.429	-0.128	1.351	-0.072	1.478	-0.193	1.522	-0.219
US Weather	30	0.893	-0.036	0.868	-0.041	1.027	-0.172	0.939	-0.091	0.896	-0.068
	96	1.123	-0.040	1.164	-0.102	1.155	-0.085	1.204	-0.121	1.143	-0.088
	336	1.296	-0.044	1.364	-0.123	1.286	-0.048	1.423	-0.163	1.334	-0.111
Weather	30	0.887	-0.033	0.798	-0.020	1.342	-0.449	1.077	-0.230	1.161	-0.261
	96	1.205	-0.043	1.269	-0.220	1.436	-0.253	1.697	-0.538	1.720	-0.503
	336	1.576	-0.040	3.084	-1.591	1.691	-0.140	2.099	-0.571	2.073	-0.494
Solar	30	1.091	-0.031	1.097	-0.058	1.004	-0.020	0.984	-0.030	1.222	-0.132
	96	1.129	-0.031	1.201	-0.097	1.079	-0.021	1.080	-0.046	1.308	-0.164
	336	1.166	-0.033	1.248	-0.100	1.236	-0.087	1.107	-0.028	1.292	-0.119
ECL	30	1.003	-0.086	—	—	0.982	-0.107	0.874	-0.034	1.225	-0.288
	96	1.106	-0.094	—	—	1.090	-0.104	1.015	-0.054	1.303	-0.275
	336	1.279	-0.086	—	—	1.368	-0.177	1.236	-0.079	1.476	-0.264
Traffic	30	0.887	-0.067	—	—	0.962	-0.140	0.659	-0.015	0.770	-0.029
	96	0.920	-0.077	—	—	0.943	-0.112	0.746	-0.033	0.752	-0.017
	336	0.965	-0.084	—	—	1.012	-0.127	0.923	-0.100	0.801	-0.019

## E. Additional Experiment Results and Ablations

### E.1. Full Experiment Table

In Section 3 we presented the results of using *ELF* to adapt the forecasts of an FM. To save space we averaged results across datasets. Table 1 provides the full results for each dataset. The table shows that *ELF* provides a performance benefit for all combinations of FM, dataset and forecast horizon.

### E.2. Results on Per-Second Datasets

In the main text we look at standard times series datasets used frequently in the literature (Darlow et al., 2024), here we look additionally at datasets which have a per-second frequency. The reason we do this is to explore settings where speed of updating and computing forecast is critical and so where there is the most use for the compute efficiency of *ELF* to improve forecasts. We perform experiments with three per second datasets: Wind-PerSec (Godaheewa et al., 2021), Solar-PerSec (Godaheewa et al., 2021) and Cloud-PerSec (Joosen et al., 2023). The rest of the experimental setup is the same as for the

Table 4. MASE of time series foundation models with and without using *ELF* on per-second time series: A lower MASE is better and we present results for each dataset over multiple forecast horizon lengths denoted as  $H$  in the table. The results show that by using *ELF* we improve performance across all per-second datasets and forecast lengths tested.

Dataset	$H$	Time Series FMs									
		TTM <sub>+ELF(↓)</sub>	TimesFM <sub>+ELF(↓)</sub>	VisionTS <sub>+ELF(↓)</sub>	Chronos <sub>+ELF(↓)</sub>	Moirai <sub>+ELF(↓)</sub>					
Wind-PerSec	30	0.728	-0.041	0.774	-0.089	1.492	-0.794	1.096	-0.398	0.757	-0.070
	96	1.770	-0.036	1.851	-0.111	2.299	-0.552	2.136	-0.386	1.821	-0.082
	336	4.759	-0.058	4.923	-0.208	4.975	-0.260	5.219	-0.482	4.786	-0.079
Solar-PerSec	30	0.286	-0.050	0.246	-0.016	0.738	-0.499	0.275	-0.041	0.346	-0.109
	96	0.581	-0.103	0.508	-0.030	0.907	-0.417	0.536	-0.051	0.666	-0.183
	336	1.543	-0.165	1.528	-0.165	1.647	-0.236	1.429	-0.045	1.684	-0.229
Cloud-PerSec	30	0.940	-0.128	0.879	-0.079	0.980	-0.161	0.920	-0.110	0.947	-0.132
	96	1.060	-0.119	1.010	-0.085	1.075	-0.026	1.067	-0.127	1.082	-0.137
	336	1.285	-0.126	1.234	-0.094	1.240	-0.082	1.334	-0.172	1.379	-0.212

experiments in the main text. Results for these experiments are presented in Table 4 and show that for all the per-second datasets using *ELF* improves performance. Hence, on high-frequency datasets where computational efficiency is a major factor, we find that the lightweight *ELF* is beneficial.

### E.3. Comparison to Online Learning Methods

While we have shown that *ELF* improves the performance of FMs, it is also important to see how well it compares to other methods which use online feedback to improve forecasting performance. To do this, we benchmark *ELF* against four different online learning/adaption methods: **a)** TAFAS (Kim et al., 2025), which, like *ELF*, is a method to adapt the forecasts of an FM using online feedback. TAFAS differs to *ELF* in the fact that it adjusts the context not only the forecast, its module to adjust forecasts is conditioned on the FM forecasts not context and it uses gating (Chen et al., 2018) not exponential weighting to adjust the strength of the forecast adaption. **b)** FSNet (Pham et al., 2023), which is a modified temporal convolutional network (Bai et al., 2018), such that it has improved performance when trained continually. **c)** OneNet (Zhang et al., 2023), which is an ensemble of two forecasters fit online, where one forecaster leverages cross-channel information and the other cross-time information. The ensembled forecasters used are typically FSNet models, to reduce the problems of continual learning. However, here we also look at using TTM as the cross-time model (OneNet-TTM) to explore a variant that is more like *ELF*. We note that all of these methods are fit with gradient decent which can be computationally costly and often leads to continual learning problems (De Lange et al., 2021). Additionally, they require a offline training set to initialise their parameters, unlike *ELF*. Further details of these methods are presented in Appendix D. The results of using these methods in the rolling window setting are presented in Table 5, where we use TTM as the FM for TAFAS and compare to TTM+*ELF*, as TTM is the best performing FM in our experiments. The results show that TTM+*ELF* performs better than all of the online learning methods across all datasets tested. This shows the effectiveness of how *ELF* uses online feedback to adjust forecasts compared to these other methods.

### E.4. Comparison of *ELF* to TAFAS

In Section E.3 we compare *ELF* with TAFAS using TTM as the FM. Here, we also compare *ELF* with TAFAS using all the FMs used in our experiments. The results are presented in Table 6 and show that as with TTM *ELF* performs better than TAFAS on all the other FMs for all datasets look at. This demonstrates the benefit of using *ELF* over TAFAS for the online adaptation of FM forecasts. However, we note that given the computational efficiency of both methods, it maybe more beneficial to use both methods at the same time to improve FM performance, which we leave to future work to explore.

### E.5. Comparison of *ELF* to Continual Finetuning

An alternative method to *ELF* for using online feedback in the rolling window setting is finetuning the FM at each update step. As explained in Section B this has three main problems: **a)** there is no default model-agnostic way to repeatedly finetune

**Table 5. Results of time series online adaption methods:** We report for each method the rel. MASE w.r.t the naive seasonal forecaster, averaged over the forecast horizon lengths  $\{30,96,336\}$  and the seconds per update step, measured for the ETTh1 dataset with a prediction length of 96. We compute seconds per update step using 2 Intel(R) Xeon(R) Platinum 8168 CPUs and put in brackets the proportional speedup of updating using ELF versus the other online adaption methods. The results show that *ELF* performs the best in terms of both forecast accuracy (MASE) and compute efficiency (sec. per update step).

Dataset	TTM+ <i>ELF</i>	TTM+ <i>TAFAS</i>	OneNet-TTM	OneNet	FSNet
ETTh1	<b>0.882</b>	0.893	1.084	1.123	1.204
ETTh2	<b>0.947</b>	0.954	1.183	1.334	1.130
ETTh1	<b>0.810</b>	0.843	1.177	1.146	1.235
ETTh2	<b>0.814</b>	0.834	1.213	1.373	1.363
US-Weather	<b>0.817</b>	0.838	1.109	1.105	1.198
Weather	<b>0.770</b>	0.790	3.551	2.043	2.510
Solar	<b>0.936</b>	0.962	1.250	1.300	1.810
ECL	<b>0.831</b>	0.897	1.278	1.299	3.916
Traffic	<b>0.676</b>	0.737	0.756	0.803	1.124
Sec. Per Update Step ( <i>ELF</i> Speedup)	<b>0.38</b>	3.76 ( <b>10x</b> )	30.66 ( <b>81x</b> )	43.12 ( <b>113x</b> )	23.69 ( <b>62x</b> )

time series FMs; **b**) continually finetuning FMs lead to problems found in continual learning like catastrophic forgetting which are hard to deal with (De Lange et al., 2021; Lee & Storkey, 2024a); and **c**) finetuning large FMs is computationally expensive and so cannot be done in many real world deployment settings (Ekambaram et al., 2024). These reasons are why we do not compare the efficient, model-agnostic and unforgetting *ELF* to finetuning in the main text. However, it is still useful to see how well *ELF* compares to finetuning approaches.

To look at the performance of finetuning in the rolling window setting we perform an experiment where we finetune TTM at each update step. We use TTM as it is the only time series FM which we know of that proposes an efficient finetuning scheme but we note that this scheme is specific to TTM and cannot be used for other FMs, unlike *ELF* (Ekambaram et al., 2024). To address the continual learning problems encountered by incrementally finetuning TTM at each update step, we finetune using experience replay, a well known and well performing continual learning method (Ostapenko et al., 2022; Chaudhry et al., 2019; Wang et al., 2024). More specifically, we set  $M = 200$  as in our main experiments, maintain a memory buffer of 400 previously-seen instances—uniformly sampled from seen instances—and allow the method to see the last 400 time series instances. Then we finetune using TTMs scheme where the data in the memory buffer and the first 200 of the last 400 time series instances as training data and the last 200 being used as validation data for early stopping. We run the experiment on 2 Intel(R) Xeon(R) Platinum 8168 CPUs, to model a realistic deployment scenario, and measure both the MASE forecasting performance and the mean time taken to perform an update step for finetuning TTM and for *ELF*. The results of the experiments for the ETT datasets are presented in Table 7. The table shows that using *ELF* improves both forecasting accuracy and computational efficiency. For example, *ELF* has a 5.89% better forecasting performance and is 2506x faster. This means that while finetuning may not be able to be used in a real-world deployment setting due to computational expense (Joosen et al., 2023; Diao et al., 2024), *ELF* very likely can be as it incurs only a very small computational overhead.

## E.6. Comparison of *ELF* to a Single Finetuning Step

In the previous section we explored how well *ELF* compared to finetuning TTM at every update step. In this section we explore how well it compares to finetuning TTM once, a commonly explored setup in previous work (Ekambaram et al., 2024; Ansari et al., 2024). More specifically, we use TTM zero-shot for 2000 time steps and then use the data seen to finetune TTM. For the ETTh datasets this corresponds to finetuning on  $\approx 10\%$  of the data. We use the same method as in Appendix E.5 to perform the finetuning with the newest 400 data points used for validation and the rest for training. After this we use the finetuned TTM to forecast the rest of the time series. The results of these experiments for the ETT datasets are presented in Table 8. The table shows that by only finetuning once we perform worse than using TTM zero-shot and additionally worse than using TTM with *ELF*. This indicates that while a single finetuning step might help to improve forecasts in the short term, in the long term it can damage TTMs ability to generalise to the changing data distribution of the time series. Therefore, these results suggest the need for online updating to improve forecasts of FMs at deployment.

Table 6. MASE of time series foundation models using *ELF* or *TAFAS*: A lower MASE is better and we present results for each dataset over multiple forecast horizon lengths denoted as  $H$  in the table. The results show that *ELF* performs better than *TAFAS* across all datasets and forecast lengths tested.

Dataset	$H$	Time Series FMs									
		TTM		TimesFM		VisionTS		Chronos		Moirai	
		+ <i>ELF</i>	+ <i>TAFAS</i>	+ <i>ELF</i>	+ <i>TAFAS</i>	+ <i>ELF</i>	+ <i>TAFAS</i>	+ <i>ELF</i>	+ <i>TAFAS</i>	+ <i>ELF</i>	+ <i>TAFAS</i>
ETTh1	30	<b>0.911</b>	0.927	<b>0.891</b>	0.910	<b>0.904</b>	0.960	<b>0.889</b>		<b>0.922</b>	1.009
	96	<b>1.067</b>	1.080	<b>1.058</b>	1.090	<b>1.055</b>	1.078	<b>1.057</b>		<b>1.082</b>	1.166
	336	<b>1.280</b>	1.289	<b>1.288</b>	1.317	<b>1.283</b>	1.300	<b>1.287</b>		<b>1.316</b>	1.418
ETTh2	30	<b>1.455</b>	1.469	<b>1.447</b>	1.466	<b>1.471</b>	1.538	<b>1.434</b>		<b>1.477</b>	1.540
	96	<b>2.770</b>	2.788	<b>2.759</b>	2.789	<b>2.759</b>	2.786	<b>2.754</b>		<b>2.801</b>	2.872
	336	<b>6.791</b>	6.825	<b>6.776</b>	6.797	<b>6.755</b>	6.767	<b>6.758</b>		<b>6.808</b>	6.924
ETTh1	30	<b>0.753</b>	0.781	<b>0.754</b>	0.828	<b>0.768</b>	1.008	<b>0.752</b>		<b>0.767</b>	1.072
	96	<b>0.919</b>	0.957	<b>0.920</b>	1.000	<b>0.919</b>	1.021	<b>0.921</b>		<b>0.929</b>	1.225
	336	<b>1.143</b>	1.193	<b>1.145</b>	1.230	<b>1.139</b>	1.199	<b>1.149</b>		<b>1.152</b>	1.459
ETTh2	30	<b>0.763</b>	0.784	<b>0.757</b>	0.812	<b>0.789</b>	1.031	<b>0.758</b>		<b>0.782</b>	0.946
	96	<b>0.953</b>	0.979	<b>0.951</b>	1.015	<b>0.964</b>	1.065	<b>0.957</b>		<b>0.971</b>	1.151
	336	<b>1.279</b>	1.306	<b>1.301</b>	1.348	<b>1.278</b>	1.335	<b>1.285</b>		<b>1.303</b>	1.521
US Weather	30	<b>0.857</b>	0.893	<b>0.827</b>	0.857	<b>0.855</b>	1.008	<b>0.848</b>		<b>0.828</b>	0.896
	96	<b>1.083</b>	1.107	<b>1.061</b>	1.115	<b>1.070</b>	1.139	<b>1.083</b>		<b>1.055</b>	1.144
	336	<b>1.252</b>	1.269	<b>1.241</b>	1.303	<b>1.238</b>	1.274	<b>1.260</b>		<b>1.224</b>	1.336
Weather	30	<b>0.855</b>	0.880	<b>0.777</b>	0.795	<b>0.893</b>	1.322	<b>0.847</b>		<b>0.900</b>	1.138
	96	<b>1.162</b>	1.197	<b>1.049</b>	1.051	<b>1.183</b>	1.414	<b>1.159</b>		<b>1.217</b>	1.652
	336	<b>1.536</b>	1.567	<b>1.493</b>	1.613	<b>1.550</b>	1.643	<b>1.528</b>		<b>1.579</b>	2.021
Solar	30	<b>1.060</b>	1.091	<b>1.038</b>	1.096	<b>0.984</b>	1.004	<b>0.954</b>		<b>1.091</b>	1.222
	96	<b>1.098</b>	1.129	<b>1.103</b>	1.200	<b>1.058</b>	1.079	<b>1.035</b>		<b>1.144</b>	1.308
	336	<b>1.134</b>	1.166	<b>1.149</b>	1.248	<b>1.149</b>	1.236	<b>1.079</b>		<b>1.173</b>	1.292
ELC	30	<b>0.917</b>	1.000	—	—	<b>0.875</b>	0.977	<b>0.840</b>		<b>0.937</b>	1.223
	96	<b>1.012</b>	1.100	—	—	<b>0.987</b>	1.077	<b>0.961</b>		<b>1.028</b>	1.301
	336	<b>1.193</b>	1.267	—	—	<b>1.191</b>	1.298	<b>1.157</b>		<b>1.212</b>	1.474
Traffic	30	<b>0.820</b>	0.887	—	—	<b>0.822</b>	0.962	<b>0.644</b>		<b>0.741</b>	0.770
	96	<b>0.843</b>	0.921	—	—	<b>0.832</b>	0.943	<b>0.713</b>		<b>0.735</b>	0.752
	336	<b>0.881</b>	0.965	—	—	<b>0.885</b>	1.011	<b>0.822</b>		<b>0.782</b>	0.801

### E.7. Continually Finetuning TTM with ELF

Up to this point we have assumed that we keep the FM fixed while using ELF. This is mainly due to the fact, as discussed before, that it is computationally expensive to continually finetune an FM. Additionally, the continual finetuning of FMs is not straightforward, coming with numerous complications as demonstrated by work in continual learning (CL) (De Lange et al., 2021). However, it is still interesting to explore the performance of using ELF while continuing finetuning the FM. To do this we perform an experiment where we continually finetune TTM (the only FM, to our knowledge, with an efficient finetuning scheme) and use ELF (TTM-Finetune+*ELF*) on the ETT datasets. The results of this experiment are presented in Table 9 and show that keeping TTM fixed performs best in most cases. However, for a few dataset and forecast horizon combinations finetuning TTM alongside ELF helps, though it is more computationally costly. Therefore, this experiment shows that keeping the FM fixed is a sensible design decision, performing in general better. But, there may be cases where computational cost and continual learning are not as big issues where it is beneficial to finetune the FM as well.

Table 7. **Computational and forecasting performance of using ELF with TTM compared to incrementally finetuning TTM (TTM-Finetune):** In the table we present the average results for all the ETT datasets over the forecast horizons of  $\{30,96,336\}$ . The results show that using ELF improves both the forecasting performance and computational efficiency when compared to finetuning.

Method	Seconds-Per-Update (CPU)	MASE
<b>TTM-Finetune</b>	911.52	1.746
<b>TTM+ELF</b>	0.38	1.673
Avg. <i>ELF</i> improvement	<b>2506x</b> ( $\uparrow$ )	<b>5.89%</b> ( $\uparrow$ )

Table 8. **MASE results of finetuning TTM once on the ETT datasets (TTM-Single-Finetune):** For each dataset and forecast horizon, we finetune TTM on the first 2000 time steps and the use it to forecast the rest of the time series. We compare this method to (zero-shot) TTM and when using TTM with ELF (TTM+ELF). Furthermore, we bold methods which perform the best for each dataset and forecast horizon combination. The table shows that finetuning TTM once damages its performance, as this performs worse than TTM without finetuning.

Dataset	$H$	TTM	TTM-Single-Finetune	TTM+ELF
ETTh1	30	0.930	0.965	<b>0.911</b>
	96	1.081	1.172	<b>1.067</b>
	336	1.286	1.537	<b>1.280</b>
ETTh2	30	1.472	1.579	<b>1.455</b>
	96	2.786	2.927	<b>2.770</b>
	336	6.802	7.044	<b>6.791</b>
ETTh1	30	0.802	0.856	<b>0.753</b>
	96	0.973	1.055	<b>0.919</b>
	336	1.205	1.346	<b>1.143</b>
ETTh2	30	0.799	0.885	<b>0.763</b>
	96	0.991	1.116	<b>0.953</b>
	336	1.320	1.564	<b>1.279</b>

### E.8. ELF Performance versus Update Frequency

In our experiments we refit the ELF-Forecaster every  $M = 200$  time steps. This number is fixed across our experiments and has not been tuned. In this section we look at how performance is impacted by varying this update parameter. Figure 5 plots the MASE of our approach as we increase the update frequency of ELF. The results shown are for the ETTh2 (right) and ETTm1 (left) datasets for the TTM FM (the FM attaining the best results on this dataset). These graphs demonstrate how more regular updating generally improves performance of our approach. This supports our core hypothesis that for time series it is crucial to utilise the most up-to-date data.

### E.9. ELF-Forecaster Computational Efficiency Ablation

When training online in real-time is it vital that model fitting be fast and computationally low-cost. This necessity motivates our decision to use a linear model which can be fit in closed-form for the ELF-Forecaster. Additionally, as discussed previously, we take advantage of two ways to speed up our method: **1)** we use the Woodbury matrix identity and **2)** we discard high frequency components when fitting the ELF-Forecaster. In this section we evaluate how these techniques impact the amount fitting time on a CPU. This ablation complements Section E.10 which explores how removing high frequencies impacts the performance of ELF, demonstrating that the decline in performance is slight. Thus together this section and Section E.10 validate our decision to remove high frequencies to improve speed.

Table 9. MASE results of finetuning TTM and using ELF (TTM-Finetune+ELF) on the ETT datasets : We report results where we continually finetune TTM alongside using ELF to adapt its forecasts. We bold methods which perform the best for each dataset and forecast horizon combination. The table shows that finetuning TTM with ELF in general performs worse than keeping TTM frozen.

Dataset	H	TTM+ELF	TTM-Finetune+ELF
ETTh1	30	<b>0.911</b>	0.940
	96	<b>1.067</b>	1.081
	336	<b>1.280</b>	1.300
ETTh2	30	<b>1.455</b>	1.595
	96	<b>2.770</b>	2.784
	336	6.791	<b>6.784</b>
ETTh1	30	<b>0.753</b>	0.784
	96	0.919	<b>0.918</b>
	336	1.143	<b>1.140</b>
ETTh2	30	<b>0.763</b>	0.799
	96	<b>0.953</b>	0.959
	336	<b>1.279</b>	1.282

E.9.1. IMPACT OF % OF DISCARDED FREQUENCIES ON EXECUTION SPEED

As detailed in Section 2 the ELF includes a feature allowing the model to discard a percentage of the high frequencies of the context and targets when fitting in order to improve inference and fitting time. In this section we explore how varying the percentage of high frequencies which are discarded impacts the total execution time for fitting and inference. Specifically, we vary the proportion of frequencies discarded in steps of 5% and record the time taken by ELF, for fitting and inference on a single data batch of size 200. For these experiments we do not use the Woodbury identity to investigate the role of frequencies on execution time in isolation. To ensure consistent resource allocation, we bound the execution to two CPU cores. This allowed us to isolate the computation to specific cores, mitigating potential variability caused by the operating system’s task scheduler.

Figure 6 shows the results of these experiments, plotting fitting + inference time against percentage of discarded frequencies. The plot suggest that execution speed improves by discarding a higher proportion of frequency components. For example, discarding 40% of components results in a 25% speed-up compared to using 100% of the components.



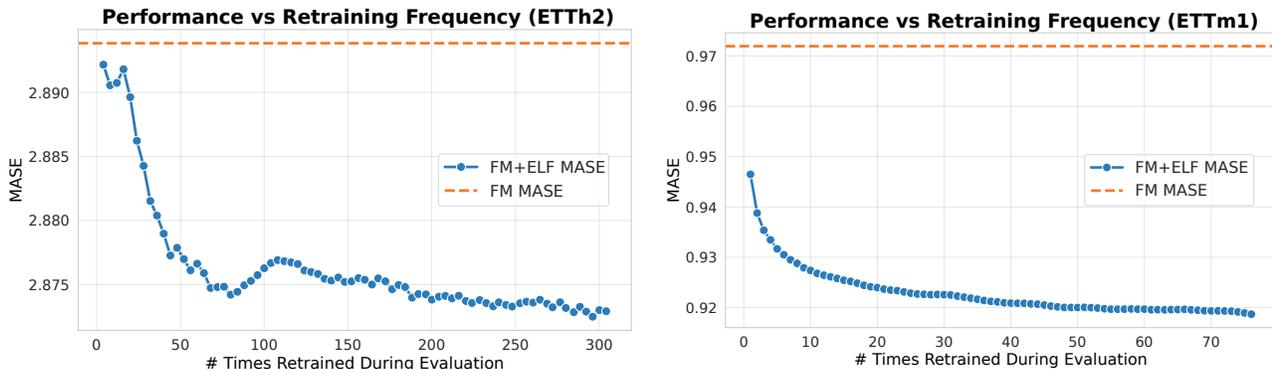


Figure 5. ELF performance as a function of the update frequency used during online evaluation, indicating that more frequent updating boosts performance: The left figure shows results for the ETTh2 dataset, while the right figure shows results for the ETTm1 dataset.

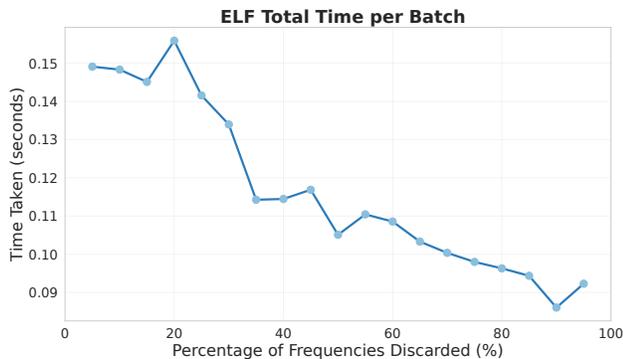

**Figure 6. The impact on time taken for fitting and inference as a function of percentage of frequencies discarded by ELF:** We measure the time ELF takes for fitting and inference on a batch size of 200 as the percentage of discarded frequency components increases. As more frequencies are discarded, the total time decreases. Fitting and inference are performed using two CPU cores. Due to the presence of noise, the curve is not perfectly monotonic, as might be expected.

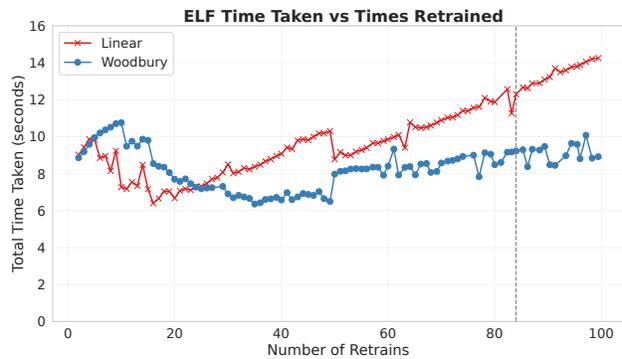

**Figure 7. The impact of retraining frequency on ELF fitting+inference speed:** We plot the total time taken for fitting and inference in ELF as we vary the number of times the model is refitted during evaluation on the ETTh1 dataset with a horizon of 336. We compare the performance of the Woodbury update rule (blue) with the more basic OLS (‘linear’) approach. No frequency components are removed in this experiment. As retraining becomes more frequent, the benefit of using the Woodbury identity increases; when retraining occurs 84 times, the speed-up is approximately 25% over the naive ‘linear’ implementation. Minor fluctuations in the curve reflect the noise inherent in measuring computation speed.

### E.9.2. SPEED-UP FROM THE WOODBURY MATRIX IDENTITY

The ELF-Forecaster, detailed in Section 2, uses the Woodbury matrix identity. In this section we record how this design decision impacts the time taken for fitting and inference of ELF. We vary the number of times that we refit the ELF-Forecaster during evaluation on the ETTh1 dataset and record the total time taken to fit and predict using the ELF model. We repeat twice, once using the Woodbury identity and once not using the identity which we call *linear*. All fitting and prediction occurs on 2 CPUs. For these experiments we do not throw away any high frequency components so that we can study the impact of the woodbury identity in isolation. We use a prediction horizon of 336. The results of these experiments are plotted in Figure 7, where we plot the number of retrains on the x-axis against total time in the y-axis. ‘Woodbury’ is plotted in blue and ‘linear’ in red.

By inspection of Figure 7 we see that, when one retrains rarely, it is preferable *not* to use the Woodbury update rule. This is because the Woodbury update rule is suited for low-rank updates and when refitting occurs infrequently, the rank of the update matches the rank of the matrix being updated. However, when retraining occurs regularly the Woodbury grants a speed-up over the naive implementation. Moreover, the gain increases as the regularity of retraining increases. In our main experiments we refit every 200 times steps. For the ETTh1 dataset this corresponds to refitting the ELF-Forecaster 84 times. At this retraining frequency the Woodbury matrix identity grants a roughly 25% speed-up. The graph features certain bumps which reflect the noise inherent in measuring execution time. Both graphs show a bump at 50 retrains. On the ETTh1 dataset 50 retrains corresponds to retraining every 336 time steps, this value is equal to the prediction horizon length. Consequently, as the number of retrains increases from 49 to 50 prediction length exceeds the batch size for the first time impacting the speed of the matrix computations and explaining the apparent discontinuity.

### E.10. ELF Performance as Function of % High-Frequencies Discarded

The ELF-Forecaster removes high frequencies from the context and target to reduce dimensionality, thereby speeding-up model fitting and inference. In Figure 8 we look at how performance is impacted by this design choice. We plot the performance on the y-axis and the percentage of frequency components which are discarded on the x-axis. The plot shows the Weather (top left plot), ETTh1 (top right), Electricity (bottom left), and Solar (bottom right) datasets, each using a forecast horizon of 96 and a TTM base forecaster. The performance of the TTM FM without online adaption is given by the horizontal black dashed line. While removing high frequencies results in a drop in performance, removing only 10-20% of frequencies has a negligible impact on method performance. Taking into account the meaningful speed-up observed in the ablations in Section E.9 validates this decision to drop high frequency components.

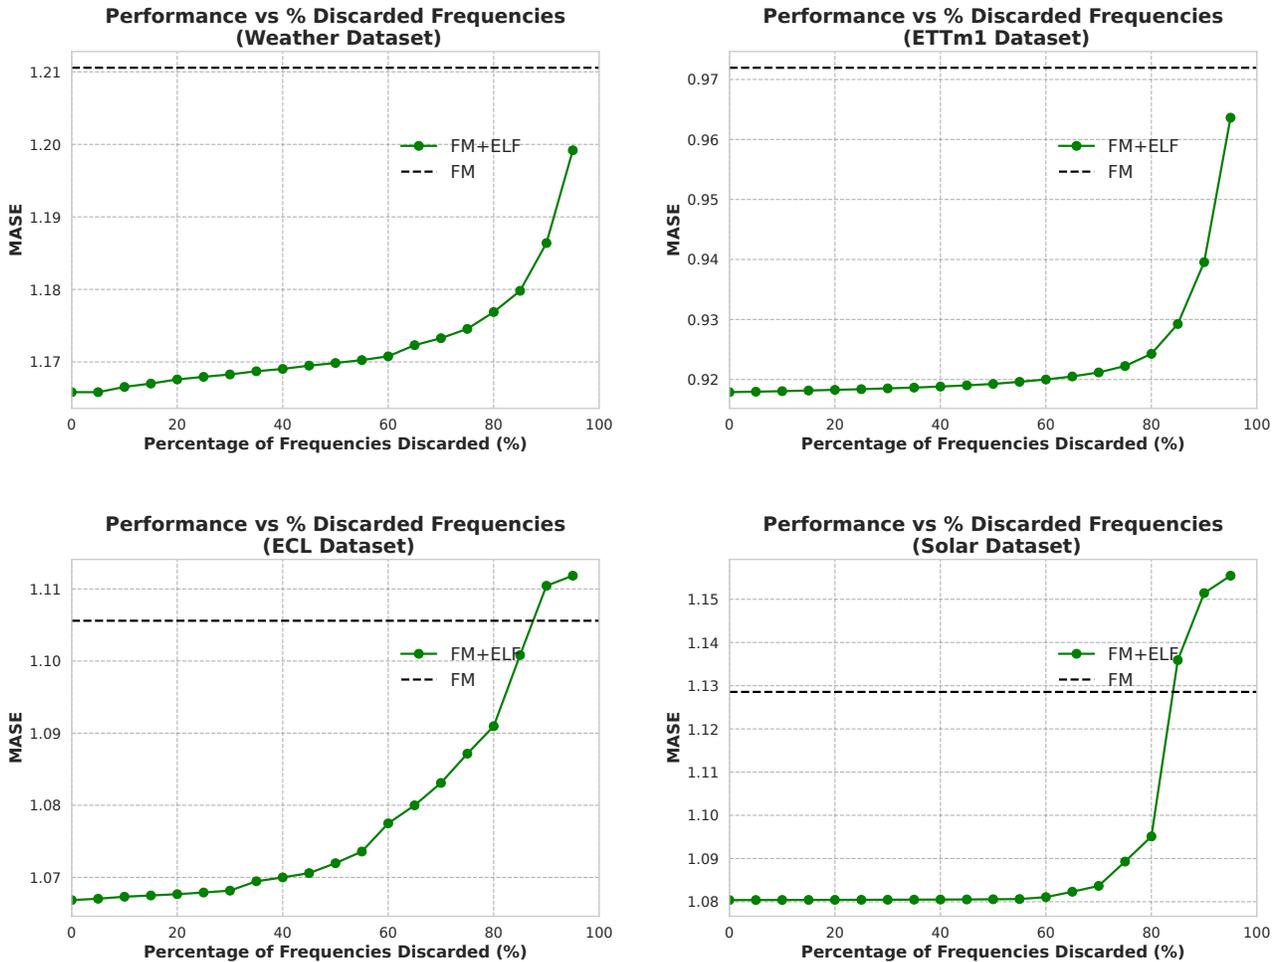


Figure 8. ELF performance as a function of the percentage of high-frequency components discarded before model fitting: We plot the MASE of FM+ELF as the percentage of high-frequency components removed by the ELF-Forecaster increases, for the Weather (top left plot), ETTm1 (top right), Electricity (bottom left), and Solar (bottom right) datasets. The foundation model (FM) used is TTM. The MASE of the FM (black dashed line) is shown for comparison. As more frequencies are discarded, performance begins to decline; however, initially, this decline is minor (e.g. for the ETTm1 dataset, removing 20% of frequency components results in only a roughly 0.1% increase in MASE).

### E.11. ELF-Forecaster Ablation

We ablate the ELF-Forecaster by comparing performance when using this forecaster with other choices of forecast model while keeping the ELF-Weighter fixed. Table 10 compares the performance of various forecasters when using the ELF-Weighter. We report combined MASE values for four choices of forecaster: a linear model trained with online gradient descent (OGD), FITS, FSNet and a linear forecaster trained online to predict the residuals of the FM. All results are presented relative to the FM+ELF model (i.e. where the forecaster is the ELF-Forecaster), therefore values greater than 1 indicate worse performance than using the ELF-Forecaster. For each FM and forecast horizon we average performance across all datasets. The table shows that for all forecast horizons and FMs the ELF-Forecaster outperforms the selected forecaster baselines.

Table 10. **Ablation of using different forecasters instead of the ELF-Forecaster:** We replace the ELF-Forecaster with: a linear model trained by online gradient descent (OGD), FITS, FSNet and a residual predictor approach. In each case we change nothing except for the forecaster; combining the FM and the forecaster using the ELF-Weighter. Results are given as MASE relative to the the MASE of the naive seasonal forecaster and we average results across all datasets. We find that the ELF-forecaster leads to better performance than using any of the other alternatives tested across each FM and forecast horizon.

		Average Rel. MASE w.r.t Naive Seasonal Forecaster over all Datasets				
FM	$H$	ELF	OGD-Forecaster	FITS-Forecaster	FSNet-Forecaster	Residual-Predictor
TTM	30	<b>0.796</b> $\pm 0.038$	0.840 $\pm 0.039$	0.842 $\pm 0.040$	0.833 $\pm 0.039$	0.827 $\pm 0.043$
	96	<b>0.831</b> $\pm 0.033$	0.872 $\pm 0.029$	0.874 $\pm 0.030$	0.869 $\pm 0.030$	0.871 $\pm 0.033$
	336	<b>0.867</b> $\pm 0.028$	0.904 $\pm 0.022$	0.908 $\pm 0.022$	0.905 $\pm 0.023$	0.926 $\pm 0.014$
TimesFM	30	<b>0.776</b> $\pm 0.052$	0.817 $\pm 0.053$	0.818 $\pm 0.054$	0.814 $\pm 0.052$	0.816 $\pm 0.054$
	96	<b>0.853</b> $\pm 0.029$	0.910 $\pm 0.029$	0.912 $\pm 0.030$	0.926 $\pm 0.018$	0.905 $\pm 0.033$
	336	<b>0.898</b> $\pm 0.017$	0.958 $\pm 0.015$	0.964 $\pm 0.016$	1.014 $\pm 0.047$	0.956 $\pm 0.014$
VisionTS	30	<b>0.791</b> $\pm 0.030$	0.930 $\pm 0.009$	0.935 $\pm 0.008$	0.918 $\pm 0.016$	0.893 $\pm 0.013$
	96	<b>0.825</b> $\pm 0.033$	0.898 $\pm 0.029$	0.902 $\pm 0.029$	0.897 $\pm 0.033$	0.883 $\pm 0.028$
	336	<b>0.868</b> $\pm 0.027$	0.928 $\pm 0.022$	0.934 $\pm 0.022$	0.930 $\pm 0.024$	0.924 $\pm 0.021$
Chronos	30	<b>0.753</b> $\pm 0.037$	0.820 $\pm 0.032$	0.822 $\pm 0.032$	0.817 $\pm 0.033$	0.816 $\pm 0.032$
	96	<b>0.810</b> $\pm 0.041$	0.915 $\pm 0.056$	0.917 $\pm 0.056$	0.914 $\pm 0.057$	0.892 $\pm 0.048$
	336	<b>0.856</b> $\pm 0.032$	0.960 $\pm 0.046$	0.966 $\pm 0.046$	0.968 $\pm 0.051$	0.933 $\pm 0.034$
Moirai	30	<b>0.800</b> $\pm 0.041$	0.939 $\pm 0.039$	0.941 $\pm 0.050$	0.928 $\pm 0.049$	0.920 $\pm 0.050$
	96	<b>0.836</b> $\pm 0.043$	0.980 $\pm 0.029$	0.982 $\pm 0.062$	0.976 $\pm 0.062$	0.947 $\pm 0.030$
	336	<b>0.870</b> $\pm 0.037$	0.990 $\pm 0.022$	0.997 $\pm 0.054$	0.996 $\pm 0.055$	1.001 $\pm 0.019$

### E.12. ELF-Weighter Ablation

The ELF-Weighter consists of a combination two separate weighers—fast and slow—therefore it is useful to understand the respective contribution of these two parts. To perform this ablation we ran experiments where we only used the slow weighter (*ELF-SlowWeighter*) or fast weighter (*ELF-FastWeighter*) on their own. The results of these experiments are recorded in Table 11, each FM and prediction horizon the average MASE across all datasets used in our main experiments (ETTs, US-Weather, Weather, Solar, ECL and Traffic). The table shows, by the bolded values, that using the full ELF-Weighter is better or equal to only using the fast or slow weighter. Additionally, we find that only in a few cases (33%) does the performance of the fast weighter or slow weighter match the performance of the combined weighter. We find that in these cases the combined weighter defaults to either fast weighter or slow weighter, perhaps due to not finding a benefit in terms of performance of mixing them. Hence, we have shown that making the ELF-weighter a combination of a fast and slow weighter generally improves performance and never makes it worse, while also having minimal additional compute overhead.

In Table 11 we also show the results of using the Hedge weighting algorithm (*ELF-HedgeWeighter*) or an unweighted mean to combine the forecasts of the FM and ELF-Forecaster (*ELF-Unweighted*). Hedge is similar to exponential weighting where the only difference is that at each update step the FM or ELF-Forecaster is chosen to solely give forecasts until the next update step by sampling from the distribution defined by the weights (Cesa-Bianchi & Lugosi, 2006). While, by an unweighted mean we mean that we set  $w_\tau = 0.5$  for all update steps  $\tau$ . The results in Table 11 show that using either Hedge or an unweighted mean leads to poor performance and they are never better or equivalent to using the ELF-Weighter in our experiments. Hence, this provides evidence that using a weighted mean to combine forecasts is a good design decision.

Table 11. Results of ablation where we compare using the full ELF-Weighter (*ELF*) with when using only its slow weighter component (*ELF-SlowWeighter*), fast weighter component (*ELF-FastWeighter*), using Hedge (*ELF-HedgeWeighter*) or using an unweighted mean (*ELF-Unweighted*): We present for each FM and prediction horizon the average MASE ( $\pm$  standard error) across all datasets used in our main experiments. We bold the lowest average MASE weighter each FM and prediction horizon. The table shows that using the full ELF-Weighter is better than using either of its components independently and that using Hedge or an unweighted mean performs poorly.

Average Rel. MASE w.r.t Naive Seasonal Forecaster over all Datasets						
FM	$H$	<b>ELF</b>	<b>ELF-SlowWeighter</b>	<b>ELF-FastWeighter</b>	<b>ELF-HedgeWeighter</b>	<b>ELF-Unweighted</b>
TTM	30	<b>0.796</b> $\pm 0.038$	0.797 $\pm 0.038$	0.798 $\pm 0.038$	0.809 $\pm 0.040$	0.804 $\pm 0.037$
	96	<b>0.831</b> $\pm 0.033$	0.832 $\pm 0.034$	0.833 $\pm 0.032$	0.843 $\pm 0.034$	0.839 $\pm 0.031$
	336	<b>0.867</b> $\pm 0.028$	0.868 $\pm 0.028$	0.869 $\pm 0.027$	0.877 $\pm 0.028$	0.874 $\pm 0.025$
TimesFM	30	<b>0.776</b> $\pm 0.052$	0.782 $\pm 0.050$	<b>0.776</b> $\pm 0.052$	0.799 $\pm 0.054$	0.784 $\pm 0.048$
	96	<b>0.853</b> $\pm 0.029$	0.858 $\pm 0.029$	<b>0.853</b> $\pm 0.029$	0.872 $\pm 0.030$	0.871 $\pm 0.021$
	336	<b>0.898</b> $\pm 0.017$	0.900 $\pm 0.017$	<b>0.898</b> $\pm 0.017$	0.913 $\pm 0.017$	0.967 $\pm 0.056$
VisionTS	30	<b>0.791</b> $\pm 0.030$	0.793 $\pm 0.030$	0.792 $\pm 0.030$	0.811 $\pm 0.034$	0.829 $\pm 0.021$
	96	<b>0.825</b> $\pm 0.033$	0.828 $\pm 0.033$	0.826 $\pm 0.032$	0.841 $\pm 0.032$	0.842 $\pm 0.031$
	336	<b>0.868</b> $\pm 0.027$	0.870 $\pm 0.027$	0.870 $\pm 0.027$	0.883 $\pm 0.027$	0.878 $\pm 0.025$
Chronos	30	<b>0.753</b> $\pm 0.037$	0.758 $\pm 0.037$	0.755 $\pm 0.036$	0.777 $\pm 0.039$	0.774 $\pm 0.32$
	96	<b>0.810</b> $\pm 0.041$	0.814 $\pm 0.040$	0.811 $\pm 0.041$	0.830 $\pm 0.041$	0.841 $\pm 0.042$
	336	<b>0.856</b> $\pm 0.032$	0.858 $\pm 0.032$	<b>0.856</b> $\pm 0.032$	0.874 $\pm 0.029$	0.886 $\pm 0.036$
Moirai	30	<b>0.800</b> $\pm 0.041$	0.802 $\pm 0.041$	0.802 $\pm 0.042$	0.818 $\pm 0.044$	0.830 $\pm 0.037$
	96	<b>0.836</b> $\pm 0.043$	0.837 $\pm 0.043$	0.838 $\pm 0.043$	0.849 $\pm 0.043$	0.872 $\pm 0.043$
	336	<b>0.870</b> $\pm 0.037$	<b>0.870</b> $\pm 0.036$	0.872 $\pm 0.037$	0.881 $\pm 0.036$	0.901 $\pm 0.038$

### E.13. Analysis of the Performance of ELF-Forecaster Compared to FMs

To understand the impact of learning from the up-to-date feedback given in the rolling window setting, we present here the performance of using the ELF-Forecaster on it own. We compare this against using (zero-shot) TTM, the best performing FM in our experiments, and when using ELF with TTM (TTM+*ELF*). The results are displayed in Table 12, from which we can draw three main conclusions: **a)** for some datasets using TTM zero-shot performs better than learning from the given dataset online using ELF-Forecaster (e.g. ETTh1 and ETTh2); **b)** for other datasets by learning online on the given dataset ELF-Forecaster performs better than using TTM (e.g. ECL and Traffic); and **c)** using ELF-Forecaster to adapt the forecasts of TTM (TTM+*ELF*) always improves performance against using either separately. While using summary MASEs is informative, it is also useful to look at how the relative performance between the ELF-Forecaster and FMs changes over time. We can look at Figure 2 to do this, as it displays the weight  $w_\tau$  used to weight between the ELF-Forecaster and the Chronos at each update step  $\tau$  for ETTh1. The figure shows that for most channels that at the start Chronos is preferred and performs better than the ELF-Forecaster. But, as the ELF-Forecaster sees more data and therefore learns the specific time series characteristics it gradually performs better and therefore is weighted more heavily. This all shows that, as expected, using the up-to-date feedback in the rolling window setting (i.e. deployment stage), means we can learn a dataset specific forecaster (ELF-Forecaster) which steadily improves in performance over time to be comparable to the FM. Therefore, it can be used to adapt the FMs forecasts to be more dataset specific, to improve performance, which our results experimentally validate (e.g., see Appendix E.15).

Table 12. MASE of the ELF-Forecaster, TTM and when adapting TTM with ELF (TTM+ELF): The results show that ELF-Forecaster, which is trained online on each dataset, and TTM, performing zero-shot forecasting, perform similarly. TTM sometimes performs better than ELF-Forecaster and othertimes not. Additionally, TTM+ELF improves upon both TTM and using ELF-Forecaster on its own for all datasets and forecast horizon lengths.

Dataset	$H$	ELF-Forecaster	TTM	TTM+ELF
ETTh1	30	0.946	0.930	0.911
	96	1.113	1.081	1.067
	336	1.335	1.286	1.280
ETTh2	30	1.503	1.472	1.455
	96	2.819	2.786	2.770
	336	6.822	6.802	6.791
ETTh1	30	0.769	0.802	0.753
	96	0.931	0.973	0.919
	336	1.150	1.205	1.143
ETTh2	30	0.793	0.799	0.763
	96	0.981	0.991	0.953
	336	1.300	1.320	1.279
US Weather	30	0.877	0.893	0.857
	96	1.096	1.123	1.083
	336	1.262	1.296	1.252
Weather	30	0.907	0.887	0.855
	96	1.205	1.205	1.162
	336	1.568	1.576	1.536
Solar	30	1.084	1.091	1.060
	96	1.124	1.129	1.098
	336	1.172	1.166	1.134
ECL	30	0.930	1.003	0.917
	96	1.021	1.106	1.012
	336	1.205	1.279	1.193
Traffic	30	0.871	0.887	0.820
	96	0.888	0.920	0.843
	336	0.922	0.965	0.881

E.14. RMSSE results

E.15. The ELF-Forecaster Learns Dataset-Specific Features

While FMs are designed to produce good forecasts out-of-the-box, avoiding a dataset-specific training routine can mean that such models are not optimally tuned to the given data distribution. In contrast, the ELF-Forecaster is fit to data drawn from the specific time series. This allows it to pick up on dataset-specific features than the FM may miss. This way combining the forecasts of the FM with those of the ELF-Forecaster can boost performance. Two concrete examples of this are given in this section.

Figure 9 shows forecasts on the Traffic dataset (channel 620) made by TTM (left, orange) and ELF-Forecaster (right, blue). We see that while the forecasts of TTM are good, capturing daily periodicity, it does not model the decrease in traffic which occurs during the weekend (regions shaded in blue). By contrast, the ELF-Forecaster is able to identify and predict this decrease in traffic.

Figure 10 shows forecasts on two cloud time series (Joosen et al., 2024) made by TTM (orange) and TTM+ELF (blue) compared against the ground truth (red). We see that while the forecasts of TTM are fairly accurate it does not anticipate

Table 13. **RMSSE of time series foundation models with and without using ELF:** A lower RMSSE is better and we present results for each dataset over multiple forecast horizon lengths denoted as ‘ $H$ ’ in the table. The results show that by using *ELF* we improve RMSSE scores across all datasets and forecast lengths tested, as when evaluating with MASE.

		Time Series FMs									
Dataset	$H$	TTM	+ELF(↓)	TimesFM	+ELF(↓)	VisionTS	+ELF(↓)	Chronos	+ELF(↓)	Moirai	+ELF(↓)
ETTh1	30	0.806	-0.016	0.805	-0.023	0.864	-0.068	0.840	-0.052	0.877	-0.076
	96	0.954	-0.012	0.994	-0.049	0.975	-0.031	1.017	-0.068	1.032	-0.074
	336	1.149	-0.005	1.215	-0.058	1.176	-0.024	1.231	-0.072	1.259	-0.085
ETTh2	30	0.838	-0.015	0.842	-0.021	0.911	-0.072	0.868	-0.034	0.896	-0.056
	96	1.149	-0.012	1.178	-0.037	1.166	-0.029	1.209	-0.054	1.219	-0.060
	336	1.807	-0.010	1.832	-0.036	1.802	-0.015	1.897	-0.086	1.900	-0.084
ETThm1	30	0.680	-0.039	0.710	-0.067	0.860	-0.208	0.763	-0.122	0.905	-0.253
	96	0.865	-0.046	0.910	-0.088	0.963	-0.139	1.040	-0.216	1.093	-0.265
	336	1.077	-0.052	1.135	-0.106	1.108	-0.080	1.321	-0.287	1.316	-0.282
ETThm2	30	0.668	-0.032	0.693	-0.055	0.868	-0.213	0.742	-0.097	0.805	-0.154
	96	0.847	-0.034	0.892	-0.075	0.955	-0.129	0.981	-0.156	1.001	-0.173
	336	1.123	-0.036	1.187	-0.094	1.163	-0.073	1.285	-0.186	1.299	-0.198
US Weather	30	0.744	-0.030	0.746	-0.038	0.875	-0.149	0.803	-0.088	0.779	-0.067
	96	0.971	-0.032	1.035	-0.092	1.015	-0.072	1.063	-0.115	1.030	-0.087
	336	1.148	-0.033	1.230	-0.108	1.159	-0.043	1.278	-0.149	1.232	-0.108
Weather	30	0.580	-0.028	0.521	-0.017	0.941	-0.359	0.724	-0.167	0.753	-0.184
	96	0.987	-0.035	0.888	-0.034	1.203	-0.223	1.363	-0.402	1.337	-0.365
	336	1.643	-0.031	1.767	-0.214	1.761	-0.131	2.061	-0.439	2.001	-0.369
Solar	30	0.790	-0.005	0.831	-0.043	0.836	-0.045	0.846	-0.065	0.922	-0.104
	96	0.866	-0.006	0.957	-0.079	0.919	-0.045	0.997	-0.106	1.031	-0.131
	336	0.903	-0.005	1.000	-0.077	0.973	-0.057	1.033	-0.091	1.046	-0.109
ECL	30	0.846	-0.066	—	—	0.863	-0.102	0.781	-0.040	1.049	-0.250
	96	0.956	-0.070	—	—	0.964	-0.092	0.929	-0.063	1.135	-0.235
	336	1.115	-0.062	—	—	1.191	-0.138	1.130	-0.085	1.285	-0.214
Traffic	30	0.709	-0.051	—	—	0.793	-0.128	0.587	-0.027	0.630	-0.026
	96	0.783	-0.057	—	—	0.811	-0.090	0.723	-0.052	0.678	-0.020
	336	0.843	-0.057	—	—	0.876	-0.090	0.895	-0.115	0.754	-0.021

spikes which occur periodically in either of the datasets. However, the ELF-Forecaster, which is fit on drawn from these dataset, is able to insert the missing spikes boosting overall performance.

### E.16. A Note on the Performance Ordering of FMs When Using or Not Using ELF

It is interesting to see how the relative performance of FM change when using ELF to adjust their forecasts online. The results in Table 3 show that in our experiments TTM is generally the best performing FM without ELF. But, when using ELF the best performing FM is less clear: the performance of each of the FMs becomes more similar and the best model varies across dataset and prediction length. This suggests that in realistic settings where it is possible to use ELF to exploit online feedback to improve forecasts, the performance improvement in newer FMs is less stark than in the zero-shot setting. This adds qualifications to the suggested progress made in time series forecasting by successive generations of FMs.

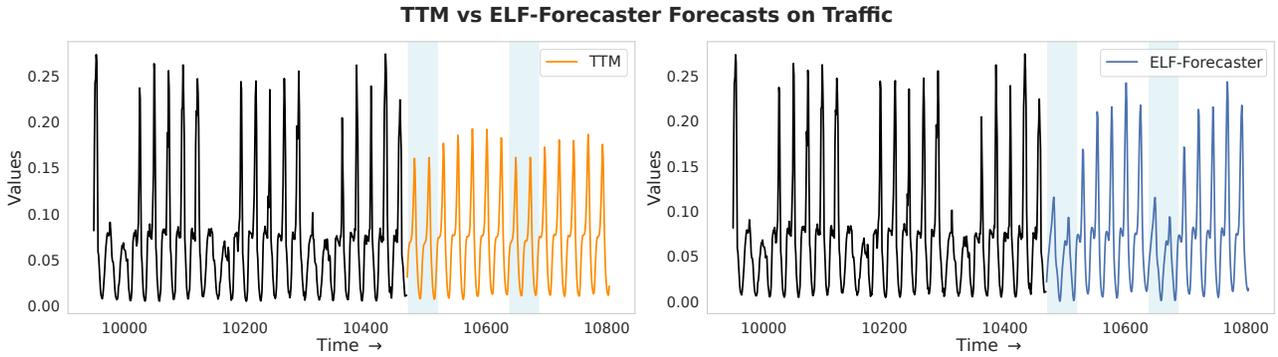


Figure 9. **TTM (left) and ELF-Forecaster (right) forecasts on the Traffic dataset:** The TTM forecast (right figure, orange) is good, picking up on the daily periodicity in traffic levels. However, TTM fails to model the weekly periodicity; specifically the decline in traffic occurring at the weekend (see the blue shaded regions). Conversely, the ELF-Forecaster, which is fit to the dataset, predicts this decline in weekend traffic numbers.

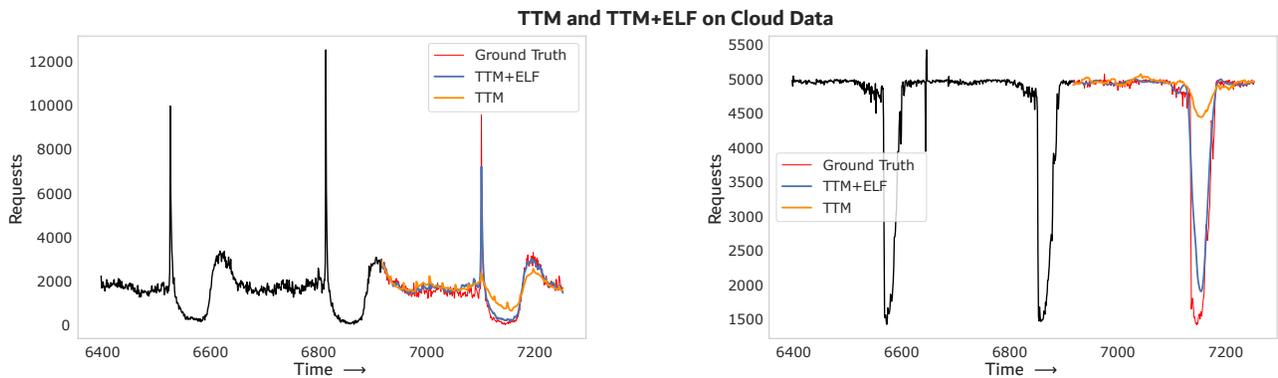


Figure 10. **TTM and TTM+ELF forecasts on two cloud time series:** In both figures, the TTM forecast (orange) is accurate but omits the large spikes which occurs around time step 7100 on the left figure and around step 7170 on the right figure. This is despite the regularity of these spikes making them seemingly easy to predict. In contrast, ELF predicts these spikes well so that TTM+ELF (blue) generates a superior forecast to TTM by itself.