

DEMYSTIFYING LANGUAGE MODEL FORGETTING WITH LOW-RANK EXAMPLE ASSOCIATIONS

Anonymous authors

Paper under double-blind review

ABSTRACT

Large Language models (LLMs) suffer from forgetting of upstream data when fine-tuned. Despite efforts on mitigating forgetting, few have investigated whether, and how forgotten upstream examples are dependent on and associated with newly learned tasks. Insights on such associations enable efficient and targeted mitigation of forgetting. In this paper, we empirically analyze forgetting (measured in log-perplexity increase) that occurs in N upstream examples of language modeling or instruction-tuning after fine-tuning LLMs on one of M new tasks, visualized in $M \times N$ matrices. We demonstrate that the matrices display simple low-rank patterns, often well-approximated with multiplicative scalar effects of upstream examples and newly learned tasks. We also examine fine-grained associations with visualization and statistics. Leveraging the low-rank nature of the associations, we predict forgetting of upstream examples when fine-tuning on unseen tasks with matrix completion over the empirical associations. This enables fast identification of most forgotten examples without expensive inference on the entire upstream data. The approach, despite simplicity, outperforms prior approaches that learn semantic relationships of learned tasks and upstream examples with LMs for predicting forgetting. We demonstrate the practical utility of our analysis by showing statistically significantly reduced forgetting as we upweight predicted examples for replay at fine-tuning.

1 INTRODUCTION

There has been growing need for promptly updating LLMs to mitigate harmful behaviors, update outdated knowledge, and expand the set of application domains. Although fine-tuning allows efficient and incremental updates of models, it risks catastrophic forgetting (McCloskey & Cohen, 1989; Goodfellow et al., 2014) of upstream knowledge learned in the pre-training or instruction-tuning phase, causing unintended prediction changes over known information. This is problematic for the stability of online deployed LLM systems, limiting the feasibility of continual fine-tuning in practice (Raffel, 2023; Shi et al., 2024).

While extensive works have developed algorithms to mitigate forgetting (Wu et al., 2024), the increasing scale of the model and data necessitates more efficient and targeted approaches. A key aspect of the challenge is understanding when and what LLMs forget, prompting analysis into the patterns of frequently forgotten examples (Toneva et al., 2019; Maini et al., 2022; Zhang & Wu, 2024), and the impacts of models and hyperparameters on forgetting (Mirzadeh et al., 2022; Kalajdziewski, 2024; Que et al., 2024; Ibrahim et al., 2024). However, how the associations between learned tasks and upstream examples inform forgetting remains under-explored. Understanding such associations creates potential for targeted mitigation of forgetting over specific upstream examples when a new task is learned. While theoretical and empirical study indicate associations between learned and forgotten tasks in shallower neural networks (Lee et al., 2021; Goldfarb et al., 2024; Ramasesh et al., 2021), the associations are under-explored for LLMs, or measured regarding upstream data of language modeling or instruction-tuning.

In this paper, we empirically study the associations between learned tasks and forgotten upstream examples of language modeling or instruction-tuning. We experiment with OLMo-1B, OLMo-7B, OLMo-7B-Instruct (Groeneveld et al., 2024) and MPT-7B (Team, 2023) models where upstream data is open-source. We analyze forgetting (in log perplexity increase) over N upstream examples, after

054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107

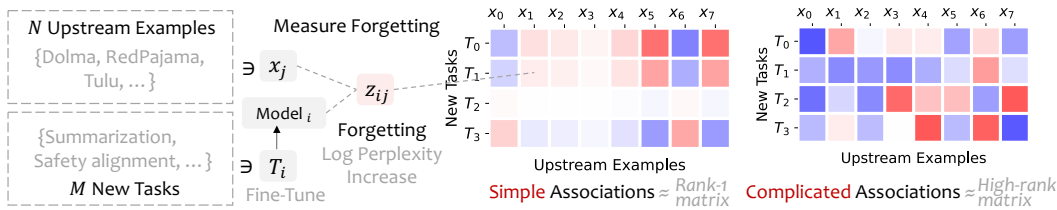


Figure 1: The problem setup of analyzing the associations between learned tasks and forgotten upstream examples as we fine-tune LLMs on one of unseen new tasks. Over total N upstream examples and M unseen tasks, we measure and record forgetting in a $M \times N$ matrix and analyze the statistical properties of the associations.

fine-tuning the model on one of M unseen instruction-tuning tasks, and represent the results in a $M \times N$ matrix. Afterwards, we visualize the matrices and fit the observations with statistical models to analyze the associations. Figure 1 illustrates the analysis setup.

Our findings suggest that the associations between learned tasks and forgotten examples are usually simple and display a low-rank pattern, as simple regression models can decently fit of the associations. We extract more fine-grained associations with visualization and statistics, showing cases where specific upstream examples are forgotten when learning a new task. We demonstrate that forgetting does not correlate with many predefined similarity metrics of learned tasks and upstream examples, such as token overlap or gradient dot-products, making these metrics poor predictors of forgetting. Inspired by the findings, we directly utilize statistics of forgetting to predict example forgetting on unseen tasks by solving a matrix completion problem over the association matrices, analogical to collaborative filtering (Sarwar et al., 2001) in recommender systems, achieving both efficiency and interpretability. Our k -nearest neighbor (KNN) model outperforms prior approaches that learn semantic relations of two examples with LMs (Jin & Ren, 2024). We verify the benefit of prediction by upweighting examples with higher predicted forgetting during replay as we fine-tune LLMs on new instruction-tuning tasks, achieving statistically significant improvement in alleviating forgetting compared to replaying random examples.

To summarize, the contributions of this paper are (1) an empirical analysis on how forgotten examples are associated with learned tasks in representative 1B and 7B language models, and (2) a novel approach of predicting example forgetting by solving a matrix completion problem over the empirical associations, and (3) a practical and efficient algorithm to mitigate forgetting during LLM fine-tuning by upweighting upstream examples for replay according to the predicted forgetting.

2 PROBLEM AND ANALYSIS SETUP

In this section, we start by formally defining the metrics of forgetting and set up the problem formulation of analyzing the associations between learned tasks and forgotten examples. We then introduce models and datasets used for collecting the statistics.

2.1 COLLECTING STATISTICS OF FORGETTING

Upstream examples and learned tasks. Large Language models (LLMs) are commonly pre-trained with language modeling objectives over a massive collection for corpora, with some LLMs further post-trained (instruction-tuned) to better follow human instructions. We use *upstream data* to refer to language modeling or instruction tuning training data used at the pre-training or post-training phase of LLMs. For upstream data of language modeling, we define each upstream example $x_j \in x_{1..N}$ as a chunk of document (e.g., a Wikipedia article) of a model-specific maximum number of tokens. For instruction tuning, each $x_j \in x_{1..N}$ corresponds to a pair of instructions and ground truth responses.

Measuring forgetting. We fine-tune an LLM (or an instruction-tuned LLM) on one unseen instruction-tuning task T_i from a collection of tasks $T_{1..M}$. This results in M separately fine-tuned models $f_{1..M}$. We then evaluate performance degradation on each upstream example $x_i \in x_{1..N}$. We measure log perplexity as the performance metric as they are applicable to both language modeling

and instruction tuning, and are known to correlate well with other dataset-specific metrics (Hoffmann et al., 2022). For language modeling, log perplexity of an example x_i is averaged over all tokens in the example; for instruction tuning, we average log perplexity over the ground truth response tokens only. We measure forgetting z_{ij} that occurs on an upstream example $x_j \in x_{1..N}$ as increase (degradation) in log perplexity after fine-tuning the LM on a new task $T_i \in T_{1..M}$. We record forgetting z_{ij} in an association matrix $Z \in \mathbb{R}^{M \times N}$.

2.2 MODELS AND DATASETS

Our analysis requires access to upstream data of LLMs for measuring their log perplexity changes occurred after fine-tuning. We experiment with OLMo-1B, OLMo-7B, OLMo-7B-Instruct, and MPT-7B where upstream data of language modeling and instruction-tuning is open-source.

OLMo-1B and 7B. OLMo models are pre-trained on Dolma (Soldaini et al., 2024), a massive collection of text covering diverse domains such as Wikipedia and news articles. We fine-tune LMs over 66 tasks from FLAN-V2 (Longpre et al., 2023), 11 tasks from Tulu V2 (Iverson et al., 2023), and 8 tasks from Dolly (Conover et al., 2023), obtaining 85 fine-tuned models. The collections cover diverse instruction-tuning tasks such as reading comprehension, math reasoning, and safety alignment. We then evaluate log perplexity increase on a 1% subset of Dolma-v1.6-Sample. Each upstream example is a maximum 2,048-token document from Dolma, resulting in 141,816 examples. For 7B models, We perform either full-parameter fine-tuning or LoRA adapter tuning (Hu et al., 2022) only, noted as OLMo-7B (Full FT) or OLMo-7B (LoRA) respectively.

OLMo-7B-Instruct. OLMo-7B-Instruct models are instruction-tuned on Tulu V2. In our experiments, we few-shot fine-tune OLMo-7B-Instruct over new task data from MMLU (Hendrycks et al., 2021), BBH (Suzgun et al., 2022), TruthfulQA (Lin et al., 2022), and Dolly, and evaluate log perplexity increase over a stratified sample of 10,718 examples from Tulu v2 as upstream examples. The number of training examples in these datasets are smaller (on the scale of tens to hundreds of examples), making the setup closer to LLM error editing (Yao et al., 2023; Zhang et al., 2024). We perform either full-parameter fine-tuning or LoRA fine-tuning.

MPT-7B. MPT models are pre-trained on a diverse collection of corpora. We fine-tune the LM over the same 85 instruction-tuning tasks as OLMo models and evaluate forgetting on Redpajama (Computer, 2023), involved as a part of the pretraining corpora of MPT. We sample 10,000 maximum 2,048 token documents from Redpajama as upstream examples.

We use a learning rate of $2e^{-6}$ for full-parameter fine-tuning and $1e^{-4}$ for LoRA fine-tuning. We include the other training details in Appendix A.


3 ASSOCIATIONS BETWEEN LEARNED TASKS AND FORGOTTEN EXAMPLES

In this section, we address the research questions regarding the associations between learned tasks and forgotten upstream examples represented in the $M \times N$ association matrices Z . We start by examining how complicated are the associations represented by the matrices Z (Sec. 3.1). We then extract and analyze more fine-grained associations in Z (Sec. 3.2), and examine how the associations correlate with similarity measures of learned tasks and upstream examples (Sec.3.3).

3.1 HOW COMPLICATED ARE THE ASSOCIATIONS?

In a hypothetical extreme case, the associations between the learned tasks and forgotten examples can be very simple, *e.g.*, where upstream examples are forgotten regardless of learned tasks; or it can be highly complicated, *e.g.*, where different new tasks cause very specific subsets of upstream examples to be forgotten. Figure 1 (right) illustrates how such simple or complicated associations may display in visualized matrices. To understand the actual associations, we start by visualizing the association matrix Z collected in the setups described in Sec. 2.2, and perform quantitative analysis as we examine whether simple regression models can fit Z with low error.

Analysis on the visualized association matrices. We visualize the association matrices Z in Figure 2 for OLMo-1B, OLMo-7B, OLMo-7B-Instruct as we perform full-parameter fine-tuning. The matrices of MPT and LoRA fine-tuning of OLMo-7B and OLMo-7B-Instruct are presented

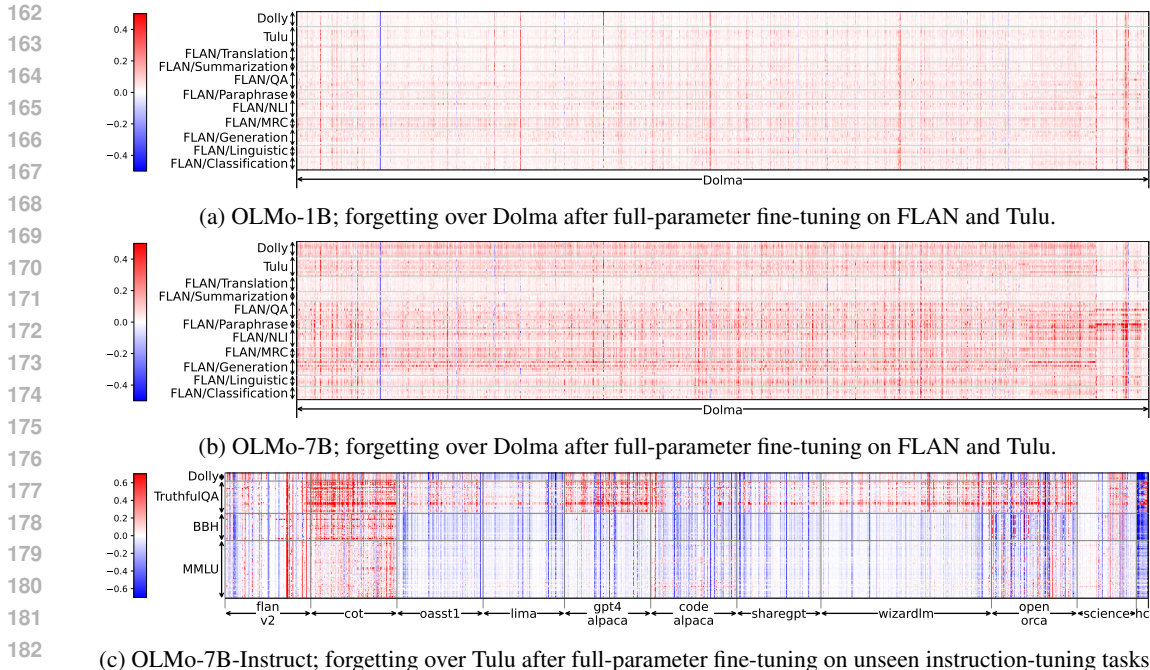

(c) OLMo-7B-Instruct; forgetting over Tulu after full-parameter fine-tuning on unseen instruction-tuning tasks.

Figure 2: Visualized matrices of associations between learned tasks and forgotten examples. We plot forgetting (log-perplexity increase) that occurs on an upstream example (in x -axis) after learning a new task (in y -axis). Log-perplexity increase can be zero or negative, which implies no forgetting.

in Figure 7 in Appendix. We see Z generally displays a neat and simple pattern. We notice that certain upstream are more prone to forgetting, while some are never forgotten (displayed as all-zero columns). Nevertheless, in some cases, upstream examples that are never forgotten elsewhere are forgotten by learning specific new tasks (e.g. wizardlm examples are almost only forgotten after learning tasks from TruthfulQA in Figure 2(c)). It implies the association is a mixture of simple and more complicated patterns.

Quantitative evaluation of simplicity of the associations. We quantitatively measure how well the association matrices Z can be approximated with simple regression models with a small number of learnable parameters. We consider (1) additive linear models, where $z_{ij} = b + \alpha_i + \beta_j + \epsilon$, where α_i and β_j are learnable parameters associated with each new task or upstream example. (2) multiplicative models (SVD with rank $r=1$), where $z_{ij} = s\alpha_i\beta_j + \epsilon$. Both models involve $M + N$ learnable parameters plus a bias term. We then measure R^2 as the metrics of determining how well the regression models fit the association matrices Z . Let f_{ij} be the fitted value, R^2 is defined as $1 - \sum_{i,j}(z_{ij} - f_{ij})^2 / \sum_{i,j}(z_{ij} - \bar{Z})^2$. R^2 ranges between 0 and 1, indicating the portion of total variance in Z that is explained by the regression models. We report R^2 of additive and multiplicative models under different setups in Figure 3 (a).

Multiplicative models fit the associations better. In 5 out of 6 setups presented in Figure 3 (a), the multiplicative model achieves a better fit than additive models at the same number of trainable parameters. An interpretation of the multiplicative models is that each upstream example is associated with their tendency of being forgotten (β_j); the learned tasks trivially determine how fast all upstream examples are forgotten (with α_i). This also creates cases where certain upstream are never forgotten ($\beta_j \approx 0$), or learn certain tasks causing little forgetting on any upstream examples ($\alpha_i \approx 0$).

A large portion of the variance in the association can be explained by the multiplicative model. We notice the multiplicative models achieve R^2 between 0.43 to 0.72 in different setups despite their simplicity, suggesting generally simple associations between learned tasks and forgotten examples. This finding is emphasized by the diversity of the learned tasks we considered (spanning from reading comprehension, coding, to safety alignment) and the broad coverage of domains in upstream language modeling and instruction-tuning data. Nevertheless, we also notice the R^2 scores are relatively lower

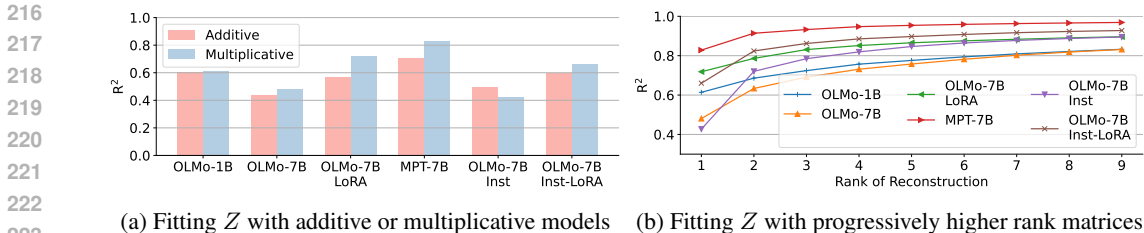


Figure 3: R^2 of fitting the associations between learned tasks and forgotten examples with (a) simple additive linear or multiplicative models, or (b) progressively more expressive models.

(0.4 to 0.5) on OLMo-7B and OLMo-7B-Instruct, implying more complicated associations than the other setups (OLMo-1B, MPT-7B, and LoRA fine-tuning of OLMo-7B models), which elicits our next research question.

3.2 WHAT ARE MORE FINE-GRAINED ASSOCIATIONS?

We extract more fine-grained associations where fine-tuning on a task causes a specific set of upstream examples to be forgotten. We perform Singular Value Decomposition (SVD) over the association matrices Z and progressively reconstruct Z with up to r -th singular values and vectors as $Z_r = \sum_{k=1}^r s_k \alpha_k \beta_k^T$. Z_r is also the optimal rank- r matrix that minimizes the Frobenius norm $\|Z - Z_r\|_F$ and the R^2 score according to the property of SVD. The first component Z_1 corresponds to the multiplicative model we examined in Sec. 3.1; the rest of components $Z_{2..M}$ captures fine-grained associations in Z .

SVD reveals fine-grained associations. We present R^2 of fitting the association with Z_r with progressively larger rank r in Figure 3 (b). We notice that for OLMo-7B and OLMo-7B-Instruct (full-parameter fine-tuning), R^2 quickly increases to 0.69 and 0.78 with Z_3 (reconstruction with up to the third component). We visualize the matrices reconstructed from each component $s_k \alpha_k \beta_k^T$ in SVD of Z . Figure 4 provides an example of patterns captured by the k -th component in OLMo-7B-Instruct. We demonstrate how the visualization extracts patterns of forgetting that is conditional on the learned tasks. In Appendix D, we further examine interpretable patterns in the decomposition of Z in OLMo-1B and 7B.

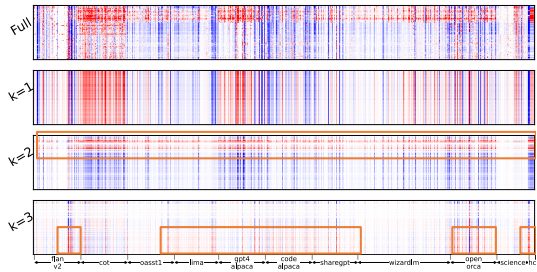


Figure 4: Patterns in associations captured by k -th component in SVD of the association matrix Z , exemplified with OLMo-7B-Instruct (full-parameter tuning, also in Fig. 2(c)). The highlighted regions display patterns that TruthfulQA tasks cause more forgetting ($k = 2$) and MMLU causes more forgetting on certain tasks in FLAN v2 and Open-Orca ($k = 3$).

3.3 HOW DO THE SIMILARITY MEASURES INTERPRET THE ASSOCIATIONS?

We examine whether the associations between learned tasks and forgotten examples are interpretable from the similarity between the learned tasks and upstream examples. We consider (1) heuristic similarity measures, such as textual similarity, and (2) theoretically grounded approximations, such as inner products of gradients.

Textual similarity. We measure textual cosine similarity z_{ij}^{ext} between learned tasks and forgotten examples with TF-IDF vectorized features over each pair of learned tasks T_i and upstream examples x_j . We also measure text representation similarity with final layer representations of OLMo-1B.

Inner products between projected gradients and model weight updates. The increase of the log perplexity z_{ij} (also known as the cross-entropy loss) can be approximated with inner products $z_{ij}^{\text{g-w}} = \langle \nabla_{\theta} f(x_j), \theta_{T_i} - \theta_0 \rangle$ under first-order Taylor expansion (Lee et al., 2019; Doan et al., 2020), where $\nabla_{\theta} f(x_j)$ is the gradient of the loss of x_j at the initial model before fine-tuning, and $\theta_{T_i} - \theta_0$

are the updates in the model weights after fine-tuning. Following Park et al. (2023); Xia et al. (2024), we use a random projection matrix $\mathbf{P} \sim \mathcal{N}_{|\theta| \times d}(0, 1)$ to reduce the dimension of the gradients or the weight changes to save the cost of storing pre-computed statistics, which preserves the inner products with high probability (Johnson & Lindenstrauss, 1984).

Inner products between projected gradients. We also measure the negative inner products of the loss gradients between the upstream example x_j and a learned task T_i , $z_{ij}^{\text{g-g}} = -\langle \nabla_{\theta} f(x_j), \nabla_{\theta} f(T_i) \rangle$, as an approximation of forgetting (Lopez-Paz & Ranzato, 2017; Chaudhry et al., 2019).

Forgetting correlates poorly with similarity measures of learned tasks and upstream examples.

We evaluate correlations between the actual forgetting z_{ij} and the various similarity measures $\{z_{ij}^{\text{text}}, z_{ij}^{\text{g-w}}, z_{ij}^{\text{g-g}}\}$ on OLMo-1B and summarize the results in Table 1. We notice that none of the similarity measures correlates with the actual forgetting, with a correlation $|\rho| < 0.1$. An interpretation of the low correlation is that the model weights deviate from the initial weights after fine-tuning to a region where first-order approximation of forgetting does not hold. We further visualize the matrices of $z_{ij}^{\text{g-w}}$ and $z_{ij}^{\text{g-g}}$ in Fig. 8 in Appendix and provide a side-by-side comparison with the matrices of forgetting Z . The visualization displays distinct patterns among the three matrices. These results imply that although the association matrices Z display a simple pattern, they are not well-interpreted with common similarity measures of learned tasks and forgotten examples.

Table 1: Correlations between various measures of similarity and the actual forgetting on upstream examples after fine-tuning on a task.

	Pearson ρ	Spearman ρ
Textual (TF-IDF)	-0.049	-0.035
Textual (Representation)	0.021	0.017
Gradient-Weight Diff. $z^{\text{g-w}}$	-0.003	-0.009
Gradient-Gradient Diff. $z^{\text{g-g}}$	0.061	0.052

4 PREDICTING EXAMPLE FORGETTING WITH ASSOCIATION MATRIX COMPLETION

We utilize our findings in Sec. 3 to predict example forgetting as the model learns a new task, a problem also studied in prior works (Jin & Ren, 2024). Finding out the most forgotten examples allows better spot of the behavior changes of the models, enabling efficient and targeted approaches to mitigate forgetting, *e.g.*, by replaying these examples (Aljundi et al., 2019a; Wang et al., 2024). Although the ground truth forgetting can be directly obtained by running inference with the fine-tuned model over the upstream data, this requires extensive computational resources. We restrict the prediction methods to be computationally efficient.

Our analysis in Sec. 3 suggests that (1) the associations between learned tasks and forgotten examples display simple statistical patterns, while (2) the associations correlate poorly with many similarity metrics. Therefore, we hypothesize that leveraging the statistics of forgetting allows more effective prediction of forgetting than leveraging the contents of the tasks and examples. Following this intuition, we formulate prediction of example forgetting as a matrix completion problem over the empirical associations Z , analogical to collaborative filtering in recommender systems (Sarwar et al., 2001), where scalable approaches are studied extensively. We start by setting up the problem formulation of predicting example forgetting, and evaluate the performance of prediction of different approaches. We present reduced forgetting by utilizing the prediction outcomes during fine-tuning.

4.1 TRAINING AND EVALUATION OF FORGETTING PREDICTION

Our goal is to accurately predict forgetting z_{ij} over upstream examples $x_{1..M}$ when the model is fine-tuned on an unseen task T_j with a prediction model g , without running expensive LLM inference on all $x_{1..M}$. To evaluate this, we create training and test splits by partitioning the set of fine-tuning tasks (noted as $\mathcal{T}_{\text{train}}$ and $\mathcal{T}_{\text{test}}$) and the rows of the association matrices Z . We further control whether the $\mathcal{T}_{\text{train}}$ and $\mathcal{T}_{\text{test}}$ are from the same category of the tasks to test both in-domain and out-of-domain generalization ability of the prediction models. For OLMo-1B and 7B experiments, we use FLAN and the in-domain tasks and Tulu and Dolly as out-of-domain testing tasks. For OLMo-7B-Instruct experiments, we use MMLU and BBH as in-domain tasks and use TruthfulQA and Dolly as out-

Table 2: RMSE of predicting example forgetting over a held-out set of upstream examples after fine-tuning LMs on unseen new tasks. We report averaged performance over different seed sets (\mathcal{S}) of upstream examples with known ground truth forgetting beforehand.

	In-Domain						Out-of-Domain					
	OLMo-1B		OLMo-7B		MPT-7B		OLMo-7B-Inst.		OLMo-1B		OLMo-7B-Inst.	
	Full FT	LoRA	Full FT	LoRA	Full FT	LoRA	Full FT	LoRA	Full FT	LoRA	Full FT	LoRA
Additive	2.81	7.40	3.50	13.33	15.57	6.12	2.81	5.83	7.01	10.02	38.90	21.22
SVD	2.80	7.14	3.48	10.41	13.74	5.89	2.82	5.76	6.80	7.03	40.47	20.23
KNN	2.79	7.33	3.45	12.80	14.30	5.54	2.84	5.83	6.83	7.71	38.77	20.82
Similarity	3.84	9.29	5.45	14.00	16.23	6.19	3.93	7.64	8.52	10.97	42.38	23.47

of-domain testing tasks. Details about the tasks included in the training, in-domain testing, and out-of-domain testing sets are discussed in Tables 7 and 8 in Appendix B.

To apply matrix completion for predicting forgetting, a few entries z_{ij} should be known when a new fine-tuning task $T_i \in \mathcal{T}_{\text{test}}$ (row i) is introduced. We therefore assume access to the ground truth forgetting z_{ij} of a tiny random set \mathcal{S} ($|\mathcal{S}| = 30$) of upstream examples for $T_i \in \mathcal{T}_{\text{test}}$, noted as seed forgetting $z_i^{\mathcal{S}} = \{z_{ij} | x_j \in \mathcal{S}\}$. Obtaining seed forgetting typically takes only a few seconds by running inference with the model fine-tuned on T_i over \mathcal{S} ; we then predict forgetting of the rest $10k - 100k$ upstream examples. Figure 5 illustrates an example of the train-test partition, seed forgetting, and the forgetting to be predicted. We use Root Mean Squared Error (RMSE) over the $\mathcal{T}_{\text{test}}$ as the metrics of predicting example forgetting.

Matrix completion approaches. We run matrix completion algorithms including additive linear, SVD, and k-nearest neighbors (KNN) models. The additive linear and the SVD models are introduced earlier in Sec. 3. Given the seed forgetting $z_i^{\mathcal{S}}$ of a task $T_i \in \mathcal{T}_{\text{test}}$, KNN finds tasks from $\mathcal{T}_{\text{train}}$ that have similar patterns of forgetting over the seed upstream examples \mathcal{S} . KNN computes an average of forgetting of top-k similar tasks from $\mathcal{T}_{\text{train}}$ weighted by their similarity as the prediction of forgetting caused by $T_i \in \mathcal{T}_{\text{test}}$ on the upstream examples $x_{1..M}$.

Comparators of predicting forgetting. We compare with a prior approach by Jin & Ren (2024) that leverages learned similarity between learned tasks and upstream examples by a trainable LM to predict forgetting. This prior work, however, focuses on predicting forgetting while fixing one single error in LM predictions; we extend the approach to predicting forgetting after fine-tuning models over a task (*i.e.*, a set of examples). The extended approach encodes upstream examples x_j and the training examples of the learned task $x_i^{1..N_i} \in T_i$ with a trainable LM encoder $h(\cdot)$ to obtain their representations. The final prediction is made with a regression head over the inner products of two representations $\langle h(x_j), \frac{1}{N_i} \sum_{N_i} h(x_i) \rangle$.

We leave the implementation details of matrix completion approaches and the learned similarity approach in Appendix B.

4.2 MITIGATING FORGETTING WITH PREDICTED FORGETTING

Leveraging predicted forgetting for mitigating forgetting. We examine the practical utility of predicting forgetting as we sparsely replay upstream examples during forgetting following Jin & Ren (2024). Sparse replay of upstream examples is known as an effective and model-agnostic way to mitigate forgetting (de Masson D’Autume et al., 2019; Ibrahim et al., 2024). We replay one mini-batch of upstream examples every 32 training steps while fine-tuning on a new task. We perform targeted mitigation of forgetting by prioritizing examples that are predicted to suffer more from forgetting. This is achieved with weighted sampling of upstream examples x_j proportional to $\exp(\hat{z}_{ij}/\tau)$, where \hat{z}_{ij} are the predicted forgetting and τ is a temperature hyperparameter set as 0.1.

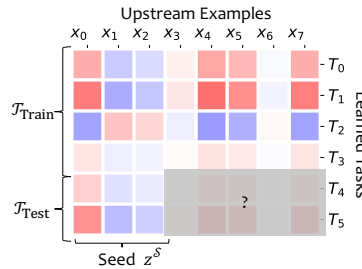


Figure 5: The training and testing setup of predicting example forgetting with association matrix completion.

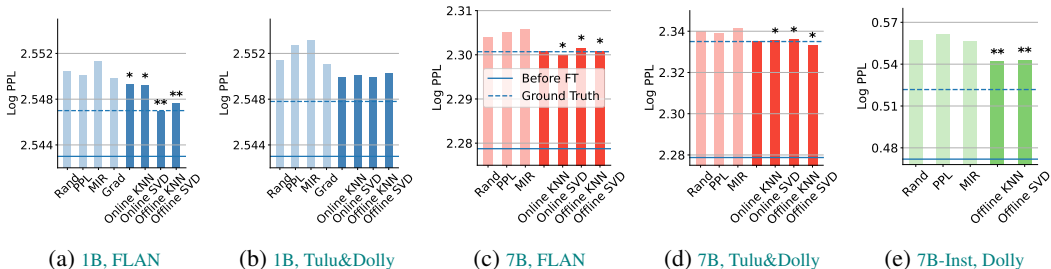


Figure 6: Log perplexity over upstream data as replay upstream examples selected by different approaches after fine-tuning OLMo or OLMo-Instruct models over in-domain or out-of-domain test tasks. The solid horizontal lines indicate the log perplexity before fine-tuning (*i.e.*, no forgetting). The dash lines show the log perplexity achieved by upweighting upstream examples according to their ground truth forgetting. * and ** indicate statistical significance of improvement ($p < 0.05$ or $p < 0.005$) compared to replaying random examples in paired t -tests over all fine-tuning tasks.

As we have discussed in Sec. 4.1, predicting forgetting with matrix completion requires seed forgetting z^S to be evaluated. We consider an offline and an online variant of the approach. The *offline* variant performs a replay-free run of fine-tuning on the task T_i , after which the seed forgetting will be evaluated. We then perform another run of fine-tuning while replaying examples with the predicted forgetting. This creates computational overhead equivalent to one extra run of fine-tuning, but is still efficient when the training set of fine-tuning is considerably smaller than the upstream data. The *online* variant instead replays random examples for first 10% of fine-tuning steps, after which it evaluates seed forgetting and determine examples to be replayed in the rest of 90% steps. Compared to the offline variant, this mitigates the extra overhead of fine-tuning by trading off the prediction accuracy of forgetting.

Baselines of mitigating forgetting. We compare with diverse strategies of selecting upstream examples for sparse replay. We primarily examine whether weighted sampling with predicted forgetting statistically significantly improves over random sampling of upstream examples (Random). We also compare with Maximally Interfered Retrieval (MIR) (Aljundi et al., 2019a), a selection strategy sharing the similar notion of importance that forgotten examples should be selected for replay. The approach performs bi-level sampling by selecting the most forgotten examples from a small random subset of upstream data (set as $|\mathcal{S}| = 30$). In addition, we apply strategies that consider different definitions of upstream example importance. We examine an approach based on perplexity thresholds (PPL) (Marion et al., 2023), which samples upstream data of which the perplexity is around the median of the distribution. For OLMo-1B, we also sample replayed examples proportional to the gradient inner products (Grad-Prod) we evaluated in Sec. 3.3, in a similar vein to coreset selection approaches that utilize gradient information (Park et al., 2023; Xia et al., 2024). As a reference, we also experiment with upweighting upstream examples with ground truth forgetting z_{ij} , which, however, can face computational efficiency issues in practice.

Metrics. We measure log-perplexity increase over a held-out subset of 10,000 examples from the upstream data. This ensures none of the test examples are selected for replay by any of the example selection strategies.

4.3 RESULTS OF PREDICTING AND MITIGATING FORGETTING

Results of predicting example forgetting. Table 2 summarizes the error of predicting example forgetting over tasks from the in-domain and out-of-domain test splits. We see matrix completion approaches consistently outperform the learned similarity model in the prior work. Among the three matrix completion approaches, we notice that SVD models in general achieve the lowest prediction error. Besides, KNN in general outperforms additive linear and learned similarity models while being highly computationally efficient. Given this finding, we primarily leverage predictions given by the KNN and SVD models to reduce forgetting during fine-tuning.

Mitigating forgetting with the predicted forgetting. We leverage the online or offline predicted forgetting by the KNN and SVD models to reweight examples during replay following our procedure

in Sec. 4.2. Figure 6 summarizes log perplexity after fine-tuning over the held-out (never replayed) upstream data as we apply different upstream example selection approaches. We visualize the relative comparisons of these approaches to no forgetting of upstream examples (log perplexity before fine-tuning). We notice that example selection based on gradient inner products (Grad) or perplexity threshold (PPL), mainly applied for identifying important training data for a task in prior works, does not show improvement in mitigating forgetting compared to replaying random examples. This implies that the notions of example importance in these works are different from how easily the examples are forgotten. We also notice that MIR does not improve over random sampling in our setup, likely because of the small size of the retrieval candidates relative to the upstream examples. Upweighting examples with ground truth forgetting (GT) consistently reduces forgetting compared to random examples. By utilizing predicted forgetting by offline SVD and KNN we statistically significantly reduce forgetting compared to random examples in 4 out of 5 tested setups. The nuanced differences between SVD and KNN in forgetting mitigation align with their in-domain prediction accuracy of forgetting in Table 2, where SVD outperforms KNN by most on OLMo-7B models. Utilizing online-predicted forgetting also statistically significantly improves over replaying random examples in 3 of the setups. The gaps between online and offline variants are closer on 7B models than 1B models.

Effects on downstream task performance measured with task-specific metrics. We evaluate fine-tuned OLMo-7B or OLMo-7B-Instruct on unseen LLM leaderboard tasks and present the results in Appendix B. We notice the performance stays stable or improves on some downstream tasks while degrades on others, indicating forgetting. Although we observe slightly improved performance of Offline-KNN to random or no replay on most forgotten tasks (*e.g.*, Sciq on OLMo-7B and IFEval on OLMo-7B-Instruct), we do not see statistical significance. We leave effective algorithms to mitigate downstream task forgetting with predicted forgetting as future work.

Computational Efficiency. Table 3 summarizes the computation cost of the approaches as a function $FT(\cdot)$ of fine-tuning steps, a function $EV(\cdot)$ of upstream examples whose perplexity is evaluated, and the cost of matrix completion (MC) that is much smaller than LLM inference or training. We note the total number of upstream examples as N , the size of seed examples as S , and the number of fine-tuning steps as Y . As S is much smaller than M , the majority of computational costs arise from fine-tuning $FT(Y)$ and $EV(N)$. Replaying with ground truth forgetting is the most costly, as it introduces an additional run of fine-tuning (after which forgetting will be evaluated) and inference over potentially very large-scale upstream data. As offline prediction of forgetting only mitigates the need for inference, the approach saves computations when the cost of fine-tuning $FT(Y)$ is notably smaller than $EV(N)$, *i.e.*, over small fine-tuning datasets and massive upstream data. Online prediction of forgetting is always efficient, requiring only one run of fine-tuning and without the need to evaluate over massive upstream data.

Table 3: Computational cost of replay-based approaches as a summation of fine-tuning costs $FT(\cdot)$, inference costs over upstream examples $EV(\cdot)$, and matrix completion costs MC .

Method	Cost
Random	$FT(Y)$
Ground Truth	$2FT(Y) + EV(N)$
Offline SVD, KNN	$2FT(Y) + EV(S) + MC$
Online SVD, KNN	$FT(Y) + EV(S) + MC$
MIR	$2FT(Y) + Y \cdot EV(S)$
PPL, GradProd	$FT(Y)$

5 RELATED WORKS

Factors that affect forgetting. In this paper, we primarily studied how the associations between learned and forgotten examples inform forgetting. Prior works have studied various factors that affect forgetting of the models, such as (1) type and size of the LM (Mehta et al., 2021; Scialom et al., 2022; Kalajdzievski, 2024; Mirzadeh et al., 2022) (2) trainable parts of the model (*e.g.*, LoRA, soft prompts, or full-model tuning) (Biderman et al., 2024a; Razdaibiedina et al., 2023) (3) hyperparameters such as learning rate (Ibrahim et al., 2024; Winata et al., 2023), dropout (Goodfellow et al., 2014), number of training steps (Biderman et al., 2024b; Kleiman et al., 2023) (4) optimizer (Lesort et al., 2023) and training algorithms (*e.g.*, various continual learning algorithms) (Shi et al., 2024; Wu et al., 2024), (5) the upstream examples or the knowledge themselves (Toneva et al., 2019; Zhang & Wu, 2024). Future works can study how various factors affect the associations between learned tasks and forgotten

examples. We consider empirical and theoretical study on the effect of task similarity on forgetting to be most relevant to ours. Ostapenko et al. (2022) empirically study relationships between task similarity and forgetting in foundation models over a sequence of newly learned tasks; our work instead focuses on forgetting of upstream data of LLMs. Theoretical study by Doan et al. (2020); Ding et al. (2024); Evron et al. (2022) dissects effects of the learned tasks on forgetting in linear models or around model initialization. We believe research on interpretations of forgetting (Tao et al., 2023; Zhao et al., 2023; Kotha et al., 2024) is complementary to ours and can potentially explain in the future why the associations in Z are often simple, and in which circumstances the associations become more complicated.

Data selection and data attribution. Related to our work, data attribution studies faithful algorithms to find training examples that account for a prediction (Koh & Liang, 2017; Ilyas et al., 2022) from a pool of training examples. Park et al. (2023); Xia et al. (2024); Li et al. (2024); Liu et al. (2024) study the problem of selecting a subset of training data that maximizes performance on a given domain or task at a fixed budget for LLMs. Feldman & Zhang (2020); Tirumala et al. (2022); Biderman et al. (2024b); Swayamdipta et al. (2020) identify memorized, important, or forgetful training data. However, the notion of data importance in these works is different from how likely the upstream examples will be forgotten during fine-tuning. Furthermore, a systematical study on how such importance is dependent on newly learned tasks is still absent. Prior works represented by Aljundi et al. (2019a); Wang et al. (2024); Aljundi et al. (2019b) study selection strategies of examples for replay-based continual learning algorithms.

Predicting model behaviors. A number of works show LLMs can display a hybrid pattern of unpredictable to highly predictable behaviors (Ganguli et al., 2022; Wei et al., 2022). Ye et al. (2023); Xia et al. (2020); Schram et al. (2023) study prediction of task performance across datasets and training setups. We perform prediction at the example level which is more fine-grained and under-explored.

6 CONCLUSIONS

In this paper, we empirically analyzed the associations between learned and forgotten examples in LM fine-tuning. We showed the association displays a low rank pattern across different setups. We showed the example associations alone offer useful information to predict example forgetting when fine-tuning LMs on new tasks. We demonstrated the practical utility of our analysis by showing reduced forgetting as we reweight examples for replay with predicted forgetting. Future works can extend the study to a continual learning setup where new domains or tasks are sequentially learned while predicting forgetting of upstream examples online.

Limitations. In our research process, we tried to control confounding factors such as model size, learning rate, or the number of training steps. However, we did not systematically study how the associations between learned tasks and forgotten upstream examples depend on these factors. For example, although we presented results of 1B and 7B models from the same family (OLMo) and observe differences in their association statistics (such as R^2 scores in Sec. 3.1), it is unclear how the associations will appear in smaller or larger models. Besides, our empirical findings raise questions about interpretability of the associations, *i.e.*, why certain examples are more prone to forgetting while learning a new task, and whether there exist more human-interpretable patterns behind the associations. Finally, we limited our experiments to fine-tuning on a single task at a time. Predicting and mitigating forgetting in sequentially learned tasks is left as future work.

REPRODUCIBILITY STATEMENT

All models and datasets used in our experiments are open-source with permissive licenses (see Appendix A for details). We will release code and statistics of forgetting collected in this study.

REFERENCES

Rahaf Aljundi, Lucas Caccia, Eugene Belilovsky, Massimo Caccia, Min Lin, Laurent Charlin, and Tinne Tuytelaars. Online continual learning with maximally interfered retrieval. *Neural Information Processing Systems*, 2019a.

- 540 Rahaf Aljundi, Min Lin, Baptiste Goujaud, and Yoshua Bengio. Gradient based sample selection for
541 online continual learning. In *Neural Information Processing Systems*, 2019b.
- 542
- 543 Dan Biderman, Jose Gonzalez Ortiz, Jacob Portes, Mansheej Paul, Philip Greengard, Connor Jen-
544 nings, Daniel King, Sam Havens, Vitaliy Chiley, Jonathan Frankle, Cody Blakeney, and John P.
545 Cunningham. Lora learns less and forgets less. *ArXiv preprint*, abs/2405.09673, 2024a.
- 546
- 547 Stella Biderman, USVSN PRASHANTH, Lintang Sutawika, Hailey Schoelkopf, Quentin Anthony,
548 Shivanshu Purohit, and Edward Raff. Emergent and predictable memorization in large language
549 models. *Advances in Neural Information Processing Systems*, 36, 2024b.
- 550
- 551 Arslan Chaudhry, Marc’Aurelio Ranzato, Marcus Rohrbach, and Mohamed Elhoseiny. Efficient
552 lifelong learning with a-GEM. In *International Conference on Learning Representations*, 2019.
- 553
- 554 Together Computer. Redpajama: an open dataset for training large language models, 2023. URL
555 <https://github.com/togethercomputer/RedPajama-Data>.
- 556
- 557 Mike Conover, Matt Hayes, Ankit Mathur, Jianwei Xie, Jun Wan, Sam Shah, Ali Ghodsi, Patrick
558 Wendell, Matei Zaharia, and Reynold Xin. Free dolly: Introducing the world’s first truly open
559 instruction-tuned llm, 2023. URL [https://www.databricks.com/blog/2023/04/
12/dolly-first-open-commercially-viable-instruction-tuned-llm](https://www.databricks.com/blog/2023/04/12/dolly-first-open-commercially-viable-instruction-tuned-llm).
- 560
- 561 Cyprien de Masson D’Autume, Sebastian Ruder, Lingpeng Kong, and Dani Yogatama. Episodic
562 memory in lifelong language learning. *Advances in Neural Information Processing Systems*, 32,
563 2019.
- 564
- 565 Meng Ding, Kaiyi Ji, Di Wang, and Jinhui Xu. Understanding forgetting in continual learning with
566 linear regression. In *Forty-first International Conference on Machine Learning*, 2024.
- 567
- 568 Thang Van Doan, Mehdi Abbana Bennani, Bogdan Mazouze, Guillaume Rabusseau, and Pierre
569 Alquier. A theoretical analysis of catastrophic forgetting through the ntk overlap matrix. In
International Conference on Artificial Intelligence and Statistics, 2020.
- 570
- 571 Itay Evron, Edward Moroshko, Rachel Ward, Nathan Srebro, and Daniel Soudry. How catastrophic
572 can catastrophic forgetting be in linear regression? In *Conference on Learning Theory*, pp.
573 4028–4079. PMLR, 2022.
- 574
- 575 Vitaly Feldman and Chiyuan Zhang. What neural networks memorize and why: Discovering the
576 long tail via influence estimation. In Hugo Larochelle, Marc’Aurelio Ranzato, Raia Hadsell,
577 Maria-Florina Balcan, and Hsuan-Tien Lin (eds.), *Advances in Neural Information Processing
578 Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020,
December 6-12, 2020, virtual*, 2020.
- 579
- 580 Deep Ganguli, Danny Hernandez, Liane Lovitt, Nova Dassarma, Tom Henighan, Andy Jones,
581 Nicholas Joseph, John Kernion, Benjamin Mann, Amanda Askell, Yuntao Bai, Anna Chen, Tom
582 Conerly, Dawn Drain, Nelson Elhage, Sheer El Showk, Stanislav Fort, Zac Hatfield-Dodds, Scott
583 Johnston, Shauna Kravec, Neel Nanda, Kamal Ndousse, Catherine Olsson, Daniela Amodei, Dario
584 Amodei, Tom B. Brown, Jared Kaplan, Sam McCandlish, Christopher Olah, and Jack Clark.
585 Predictability and surprise in large generative models. *Proceedings of the 2022 ACM Conference
on Fairness, Accountability, and Transparency*, 2022.
- 586
- 587 Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster,
588 Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff,
589 Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika,
590 Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. A framework for few-shot
591 language model evaluation, 07 2024. URL <https://zenodo.org/records/12608602>.
- 592
- 593 Daniel Goldfarb, Itay Evron, Nir Weinberger, Daniel Soudry, and PAul HAnd. The joint effect of
task similarity and overparameterization on catastrophic forgetting — an analytical model. In *The
Twelfth International Conference on Learning Representations*, 2024.

- 594 Ian J. Goodfellow, Mehdi Mirza, Xia Da, Aaron C. Courville, and Yoshua Bengio. An empirical
595 investigation of catastrophic forgetting in gradient-based neural networks. In Yoshua Bengio and
596 Yann LeCun (eds.), *2nd International Conference on Learning Representations, ICLR 2014, Banff,*
597 *AB, Canada, April 14-16, 2014, Conference Track Proceedings*, 2014.
- 598 Dirk Groeneveld, Iz Beltagy, Pete Walsh, Akshita Bhagia, Rodney Kinney, Oyvind Taffjord, A. Jha,
599 Hamish Ivison, Ian Magnusson, Yizhong Wang, Shane Arora, David Atkinson, Russell Authur,
600 Khyathi Raghavi Chandu, Arman Cohan, Jennifer Dumas, Yanai Elazar, Yuling Gu, Jack Hessel,
601 Tushar Khot, William Merrill, Jacob Daniel Morrison, Niklas Muennighoff, Aakanksha Naik,
602 Crystal Nam, Matthew E. Peters, Valentina Pyatkin, Abhilasha Ravichander, Dustin Schwenk,
603 Saurabh Shah, Will Smith, Emma Strubell, Nishant Subramani, Mitchell Wortsman, Pradeep
604 Dasigi, Nathan Lambert, Kyle Richardson, Luke Zettlemoyer, Jesse Dodge, Kyle Lo, Luca
605 Soldaini, Noah A. Smith, and Hanna Hajishirzi. Olmo: Accelerating the science of language
606 models. *ArXiv preprint*, abs/2402.00838, 2024.
- 607 Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob
608 Steinhardt. Measuring massive multitask language understanding. In *9th International Conference*
609 *on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net,
610 2021.
- 611 Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza
612 Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom
613 Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy,
614 Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and L. Sifre. Training
615 compute-optimal large language models. *ArXiv*, abs/2203.15556, 2022.
- 616 Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang,
617 and Weizhu Chen. Lora: Low-rank adaptation of large language models. In *The Tenth Interna-*
618 *tional Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*.
619 OpenReview.net, 2022.
- 620 Adam Ibrahim, Benjamin Th’erien, Kshitij Gupta, Mats L. Richter, Quentin Anthony, Timothée
621 Lesort, Eugene Belilovsky, and Irina Rish. Simple and scalable strategies to continually pre-train
622 large language models. *ArXiv preprint*, abs/2403.08763, 2024.
- 623 Andrew Ilyas, Sung Min Park, Logan Engstrom, Guillaume Leclerc, and Aleksander Madry. Data-
624 models: Predicting predictions from training data. *ArXiv preprint*, abs/2202.00622, 2022.
- 625 Hamish Ivison, Yizhong Wang, Valentina Pyatkin, Nathan Lambert, Matthew E. Peters, Pradeep
626 Dasigi, Joel Jang, David Wadden, Noah A. Smith, Iz Beltagy, and Hanna Hajishirzi. Camels in a
627 changing climate: Enhancing lm adaptation with tulu 2. *ArXiv preprint*, abs/2311.10702, 2023.
- 628 Xisen Jin and Xiang Ren. What will my model forget? forecasting forgotten examples in language
629 model refinement. In *International Conference on Machine Learning*, 2024.
- 630 William B. Johnson and Joram Lindenstrauss. Extensions of lipschitz mappings into hilbert space.
631 *Contemporary mathematics*, 26:189–206, 1984.
- 632 Damjan Kalajdzievski. Scaling laws for forgetting when fine-tuning large language models. *ArXiv*
633 *preprint*, 2024.
- 634 Anat Kleiman, Jonathan Frankle, Sham M. Kakade, and Mansheej Paul. Predicting task forgetting in
635 large language models. In *ICML 2023 Workshop DeployableGenerativeAI homepage*, 2023.
- 636 Pang Wei Koh and Percy Liang. Understanding black-box predictions via influence functions. In
637 *Proceedings of the 34th International Conference on Machine Learning, ICML, 2017*.
- 638 Suhas Kotha, Jacob Mitchell Springer, and Aditi Raghunathan. Understanding catastrophic forgetting
639 in language models via implicit inference. In *The Twelfth International Conference on Learning*
640 *Representations*, 2024.
- 641 Jaehoon Lee, Lechao Xiao, Samuel S. Schoenholz, Yasaman Bahri, Roman Novak, Jascha Narain
642 Sohl-Dickstein, and Jeffrey Pennington. Wide neural networks of any depth evolve as linear models
643 under gradient descent. *Journal of Statistical Mechanics: Theory and Experiment*, 2020, 2019.
- 644

- 648 Sebastian Lee, Sebastian Goldt, and Andrew M. Saxe. Continual learning in the teacher-student
649 setup: Impact of task similarity. In *International Conference on Machine Learning*, 2021.
650
- 651 Timothée Lesort, Oleksiy Ostapenko, Pau Rodríguez, Diganta Misra, Md Rifat Arefin, Laurent
652 Charlin, and Irina Rish. Challenging common assumptions about catastrophic forgetting and
653 knowledge accumulation. In *Conference on Lifelong Learning Agents*, pp. 43–65. PMLR, 2023.
- 654 Jeffrey Li, Alex Fang, Georgios Smyrnis, Maor Ivgi, Matt Jordan, Samir Yitzhak Gadre, Hritik Bansal,
655 Etash Kumar Guha, Sedrick Scott Keh, Kushal Arora, Saurabh Garg, Rui Xin, Niklas Muennighoff,
656 Reinhard Heckel, Jean-Pierre Mercat, Mayee Chen, Suchin Gururangan, Mitchell Wortsman, Alon
657 Albalak, Yonatan Bitton, Marianna Nezhurina, Amro Abbas, Cheng-Yu Hsieh, Dhruva Ghosh, Josh
658 Gardner, Maciej Kilian, Hanlin Zhang, Rulin Shao, Sarah Pratt, Sunny Sanyal, Gabriel Ilharco,
659 Giannis Daras, Kalyani Marathe, Aaron Gokaslan, Jieyu Zhang, Khyathi Chandu, Thao Nguyen,
660 Igor Vasiljevic, Sham M. Kakade, Shuran Song, Sujay Sanghavi, Fartash Faghri, Sewoong Oh,
661 Luke S. Zettlemoyer, Kyle Lo, Alaaeldin El-Nouby, Hadi Pouransari, Alexander Toshev, Stephanie
662 Wang, Dirk Groeneveld, Luca Soldani, Pang Wei Koh, Jenia Jitsev, Thomas Kollar, Alexandros G.
663 Dimakis, Yair Carmon, Achal Dave, Ludwig Schmidt, and Vaishaal Shankar. Datacomp-1m: In
664 search of the next generation of training sets for language models. *ArXiv*, abs/2406.11794, 2024.
- 665 Stephanie Lin, Jacob Hilton, and Owain Evans. TruthfulQA: Measuring how models mimic human
666 falsehoods. In *Proceedings of the 60th Annual Meeting of the Association for Computational
667 Linguistics (Volume 1: Long Papers)*, Dublin, Ireland, 2022. doi: 10.18653/v1/2022.acl-long.229.
- 668 Qian Liu, Xiaosen Zheng, Niklas Muennighoff, Guangtao Zeng, Longxu Dou, Tianyu Pang, Jing
669 Jiang, and Min Lin. Regmix: Data mixture as regression for language model pre-training. *ArXiv*,
670 abs/2407.01492, 2024.
671
- 672 Shayne Longpre, Le Hou, Tu Vu, Albert Webson, Hyung Won Chung, Yi Tay, Denny Zhou, Quoc V
673 Le, Barret Zoph, Jason Wei, et al. The flan collection: Designing data and methods for effective
674 instruction tuning. *arXiv preprint arXiv:2301.13688*, 2023.
- 675 David Lopez-Paz and Marc’Aurelio Ranzato. Gradient episodic memory for continual learning. In
676 *Neural Information Processing Systems*, 2017.
677
- 678 Pratyush Maini, Saurabh Garg, Zachary Lipton, and J. Zico Kolter. Characterizing datapoints via
679 second-split forgetting. In *Advances in Neural Information Processing Systems*, volume 35, 2022.
- 680 Max Marion, Ahmet Üstün, Luiza Pozzobon, Alex Wang, Marzieh Fadaee, and Sara Hooker.
681 When less is more: Investigating data pruning for pretraining llms at scale. *arXiv preprint
682 arXiv:2309.04564*, 2023.
683
- 684 Michael McCloskey and Neal J Cohen. Catastrophic interference in connectionist networks: The
685 sequential learning problem. In *Psychology of learning and motivation*, volume 24, pp. 109–165.
686 Elsevier, 1989.
- 687 Sanket Vaibhav Mehta, Darshan Patil, Sarath Chandar, and Emma Strubell. An empirical investigation
688 of the role of pre-training in lifelong learning. *J. Mach. Learn. Res.*, 24:214:1–214:50, 2021.
689
- 690 Seyed-Iman Mirzadeh, Arslan Chaudhry, Dong Yin, Huiyi Hu, Razvan Pascanu, Dilan Görür, and
691 Mehrdad Farajtabar. Wide neural networks forget less catastrophically. In *International Conference
692 on Machine Learning, ICML, 2022*.
- 693 Oleksiy Ostapenko, Timothée Lesort, Pau Rodri’iguez, Md Rifat Arefin, Arthur Douillard, Irina Rish,
694 and Laurent Charlin. Continual learning with foundation models: An empirical study of latent
695 replay. In *CoLLAs*, 2022.
- 696 Sung Min Park, Kristian Georgiev, Andrew Ilyas, Guillaume Leclerc, and Aleksander Madry. Trak:
697 Attributing model behavior at scale. In *International Conference on Machine Learning*, 2023.
698
- 699 Haoran Que, Jiaheng Liu, Ge Zhang, Chenchen Zhang, Xingwei Qu, Yi Ma, Feiyu Duan, Zhiqi Bai,
700 Jiakai Wang, Yuanxing Zhang, Xu Tan, Jie Fu, Wenbo Su, Jiamang Wang, Lin Qu, and Bo Zheng.
701 D-cpt law: Domain-specific continual pre-training scaling law for large language models. *ArXiv*,
abs/2406.01375, 2024.

- 702 Colin Raffel. Building machine learning models like open source software. *Communications of the*
703 *ACM*, 66:38 – 40, 2023.
- 704
- 705 Vinay Venkatesh Ramasesh, Ethan Dyer, and Maithra Raghu. Anatomy of catastrophic forgetting:
706 Hidden representations and task semantics. In *International Conference on Learning Representations*,
707 2021.
- 708 Anastasia Razdaibiedina, Yuning Mao, Rui Hou, Madian Khabsa, Mike Lewis, and Amjad Almahairi.
709 Progressive prompts: Continual learning for language models. In *The Eleventh International*
710 *Conference on Learning Representations*, 2023.
- 711
- 712 Badrul Munir Sarwar, George Karypis, Joseph A. Konstan, and John Riedl. Item-based collaborative
713 filtering recommendation algorithms. In Vincent Y. Shen, Nobuo Saito, Michael R. Lyu, and
714 Mary Ellen Zurko (eds.), *Proceedings of the Tenth International World Wide Web Conference*,
715 *WWW*, 2001. doi: 10.1145/371920.372071.
- 716 Viktoria Schram, Daniel Beck, and Trevor Cohn. Performance prediction via Bayesian matrix
717 factorisation for multilingual natural language processing tasks. In *Proceedings of the 17th*
718 *Conference of the European Chapter of the Association for Computational Linguistics*, Dubrovnik,
719 Croatia, 2023.
- 720 Thomas Scialom, Tuhin Chakrabarty, and Smaranda Muresan. Fine-tuned language models are
721 continual learners. In *Proceedings of the 2022 Conference on Empirical Methods in Natural*
722 *Language Processing*, Abu Dhabi, United Arab Emirates, 2022.
- 723
- 724 Haizhou Shi, Zihao Xu, Hengyi Wang, Weiyi Qin, Wenyuan Wang, Yibin Wang, and Hao Wang. Con-
725 tinual learning of large language models: A comprehensive survey. *ArXiv preprint*, abs/2404.16789,
726 2024.
- 727 Luca Soldaini, Rodney Kinney, Akshita Bhagia, Dustin Schwenk, David Atkinson, Russell Authur,
728 Ben Bogin, Khyathi Raghavi Chandu, Jennifer Dumas, Yanai Elazar, Valentin Hofmann, A. Jha,
729 Sachin Kumar, Li Lucy, Xinxu Lyu, Nathan Lambert, Ian Magnusson, Jacob Daniel Morrison,
730 Niklas Muennighoff, Aakanksha Naik, Crystal Nam, Matthew E. Peters, Abhilasha Ravichander,
731 Kyle Richardson, Zejiang Shen, Emma Strubell, Nishant Subramani, Oyvind Tafjord, Pete Walsh,
732 Luke Zettlemoyer, Noah A. Smith, Hanna Hajishirzi, Iz Beltagy, Dirk Groeneveld, Jesse Dodge,
733 and Kyle Lo. Dolma: an open corpus of three trillion tokens for language model pretraining
734 research. *ArXiv preprint*, abs/2402.00159, 2024.
- 735 Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung,
736 Aakanksha Chowdhery, Quoc V Le, Ed H Chi, Denny Zhou, , and Jason Wei. Challenging
737 big-bench tasks and whether chain-of-thought can solve them. *ArXiv preprint*, abs/2210.09261,
738 2022.
- 739 Swabha Swayamdipta, Roy Schwartz, Nicholas Lourie, Yizhong Wang, Hannaneh Hajishirzi, Noah A.
740 Smith, and Yejin Choi. Dataset cartography: Mapping and diagnosing datasets with training
741 dynamics. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language*
742 *Processing (EMNLP)*, Online, 2020. doi: 10.18653/v1/2020.emnlp-main.746.
- 743
- 744 Mingxu Tao, Yansong Feng, and Dongyan Zhao. Can BERT refrain from forgetting on sequential
745 tasks? a probing study. In *The Eleventh International Conference on Learning Representations*,
746 2023.
- 747 MosaicML NLP Team. Introducing mpt-7b: A new standard for open-source, commercially usable
748 llms, 2023. URL www.mosaicml.com/blog/mpt-7b. Accessed: 2023-05-05.
- 749
- 750 Kushal Tirumala, Aram H. Markosyan, Luke Zettlemoyer, and Armen Aghajanyan. Memorization
751 without overfitting: Analyzing the training dynamics of large language models. *ArXiv preprint*,
752 abs/2205.10770, 2022.
- 753 Mariya Toneva, Alessandro Sordoni, Remi Tachet des Combes, Adam Trischler, Yoshua Bengio,
754 and Geoffrey J. Gordon. An empirical study of example forgetting during deep neural network
755 learning. In *7th International Conference on Learning Representations, ICLR 2019, New Orleans,*
LA, USA, May 6-9, 2019. OpenReview.net, 2019.

- 756 Yifan Wang, Yafei Liu, Chufan Shi, Haoling Li, Chen Chen, H. Lu, and Yujiu Yang. InscL: A
757 data-efficient continual learning paradigm for fine-tuning large language models with instructions.
758 In *North American Chapter of the Association for Computational Linguistics*, 2024.
759
- 760 Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama,
761 Maarten Bosma, Denny Zhou, Donald Metzler, et al. Emergent abilities of large language models.
762 *arXiv preprint arXiv:2206.07682*, 2022.
- 763 Genta Winata, Lingjue Xie, Karthik Radhakrishnan, Shijie Wu, Xisen Jin, Pengxiang Cheng, Mayank
764 Kulkarni, and Daniel Preoŕiuc-Pietro. Overcoming catastrophic forgetting in massively multilingual
765 continual learning. In *Findings of the Association for Computational Linguistics: ACL 2023*, 2023.
766
- 767 Tongtong Wu, Linhao Luo, Yuan-Fang Li, Shirui Pan, Thuy-Trang Vu, and Gholamreza Haffari.
768 Continual learning for large language models: A survey. *ArXiv preprint*, abs/2402.01364, 2024.
- 769 Mengzhou Xia, Antonios Anastasopoulos, Ruochen Xu, Yiming Yang, and Graham Neubig. Predict-
770 ing performance for natural language processing tasks. In *Proceedings of the 58th Annual Meeting*
771 *of the Association for Computational Linguistics*, Online, 2020. doi: 10.18653/v1/2020.acl-main.
772 764.
- 773 Mengzhou Xia, Sadhika Malladi, Suchin Gururangan, Sanjeev Arora, and Danqi Chen. Less:
774 Selecting influential data for targeted instruction tuning. *ArXiv preprint*, abs/2402.04333, 2024.
775
- 776 Yunzhi Yao, Peng Wang, Bo Tian, Siyuan Cheng, Zhoubo Li, Shumin Deng, Huajun Chen, and
777 Ningyu Zhang. Editing large language models: Problems, methods, and opportunities. In
778 *Conference on Empirical Methods in Natural Language Processing*, 2023.
- 779 Qinyuan Ye, Harvey Yiyun Fu, Xiang Ren, and Robin Jia. How predictable are large language model
780 capabilities? a case study on big-bench. In *Conference on Empirical Methods in Natural Language*
781 *Processing*, 2023.
782
- 783 Ningyu Zhang, Yunzhi Yao, Bo Tian, Peng Wang, Shumin Deng, Meng Wang, Zekun Xi, Shengyu
784 Mao, Jintian Zhang, Yuansheng Ni, Siyuan Cheng, Ziwen Xu, Xin Xu, Jia-Chen Gu, Yong Jiang,
785 Pengjun Xie, Fei Huang, Lei Liang, Zhiqiang Zhang, Xiao-Jun Zhu, Jun Zhou, and Huajun Chen.
786 A comprehensive study of knowledge editing for large language models. *ArXiv*, abs/2401.01286,
787 2024.
- 788 Xiao Zhang and Ji Wu. Dissecting learning and forgetting in language model finetuning. In *The*
789 *Twelfth International Conference on Learning Representations*, 2024.
790
- 791 Haiyan Zhao, Tianyi Zhou, Guodong Long, Jing Jiang, and Chengqi Zhang. Does continual learning
792 equally forget all parameters? In *International Conference on Machine Learning*, 2023.
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809

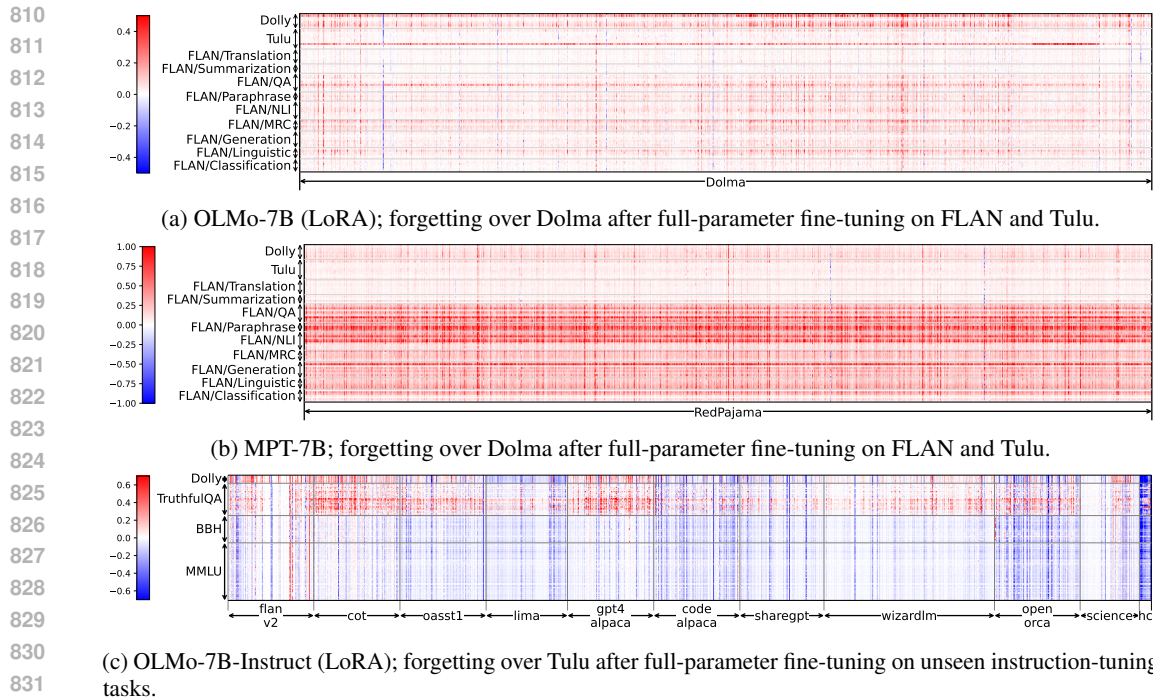


Figure 7: Additional visualized matrices of associations between learned tasks and forgotten examples. We plot forgetting (log-perplexity increase) that occurs on an upstream example (in x -axis) after learning a new task (in y -axis). Log-perplexity increase can be zero or negative, indicating no forgetting.

A DATASET, MODEL, AND LM TRAINING DETAILS

Models. We use OLMo-7B¹ of the version pretrained on Dolma v1.6; and OLMo-7B-Instruct², which is tuned on Tulu v2 and other human feedback datasets.

Learned new tasks and their categorization. We summarize the list and the categorization of newly learned tasks in Tables 7 and 8 in our experiments. We also include the number of training examples and forgetting caused by each task averaged over all upstream examples.

Training and evaluation details. For full-parameter fine-tuning of OLMo-1B and 7B, we train the model for 1,000 steps with an effective batch size of 8 and a linearly decaying learning rate of $2e^{-6}$. For LoRA fine-tuning, we set the rank of adapters as 64 in all our experiments and use a rate of 10^{-4} . We train the models for 625 steps with an effective batch size of 8. For OLMo-7B-Instruct and MMLU, BBH, TruthfulQA, considering the small size of the training sets, we train the models only for 37 steps with an effective batch size of 8. We use HuggingFace Transformers library for training and VLLM library for efficient inference. The statistics of forgetting are obtained in a single run.

Dataset licenses. MMLU and BBH are released under MIT license. Truthful QA, Dolma, Redpajama, OLMo models, and MPT models are released under Apache 2.0 license. Tulu V2 is released under ODC-By license. Dolly is released under CC BY-SA 3.0 license.

B DETAILS OF FORGETTING PREDICTION AND REPLAY

Data Splits for Predicting Example Forgetting. We mark the tasks used as in-domain test splits for predicting example forgetting (Sec. 4) in Tables 7 and 8. The train-test split for the in-domain tasks is randomly generated.

¹<https://huggingface.co/allenai/OLMo-7B>

²<https://huggingface.co/allenai/OLMo-7B-Instruct>

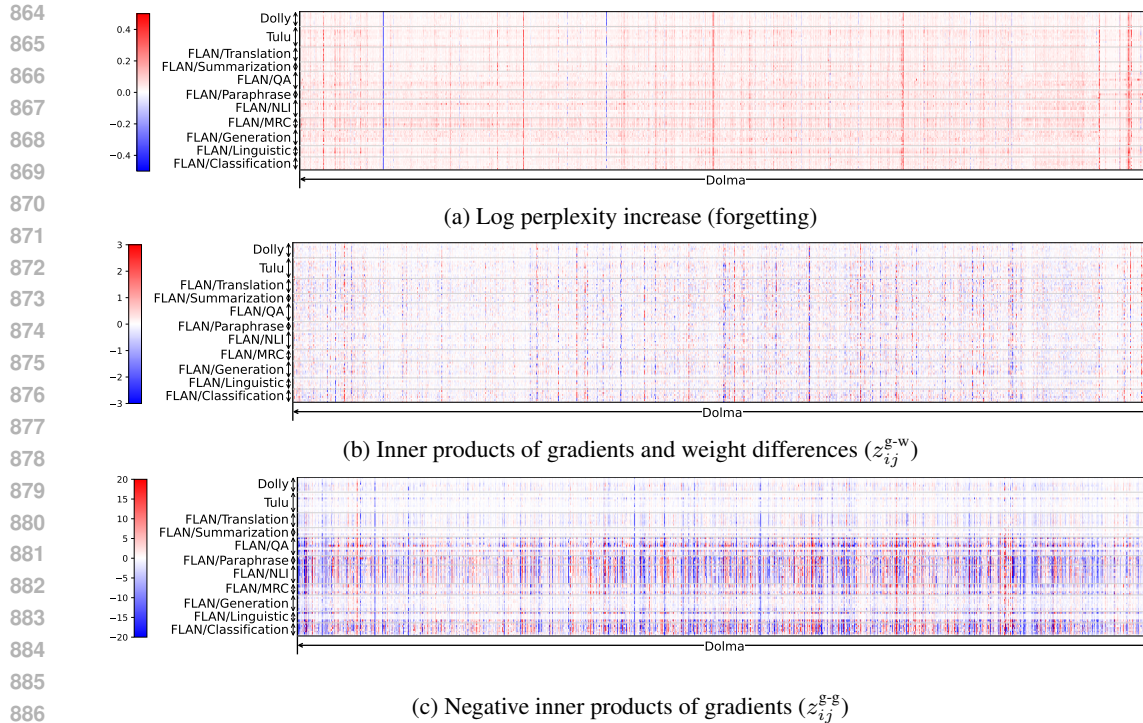



Figure 8: A side-by-side comparison between the matrices of forgetting, inner products of gradients and weight differences (z_{ij}^{g-w}), and the negative inner products of gradients (z_{ij}^{g-g}) we examines in Sec. 3.3.

Training and evaluation details. We use Surprise Library 1.1.3³ for additive linear, SVD, and KNN prediction models. For SVD, we set the dimension of the learnable features as 5. We train the regression models for 100 epochs over the association matrices. The other hyperparameters are left as default.


For in-domain test splits, we randomly sample 30 upstream examples and assume the ground truth forgetting is known for these examples. This is required for predicting forgetting on the rest of upstream examples by additive linear, SVD, and KNN methods. We repeat the experiment 10 times and report the mean and standard deviation in Table 2.

We used OLMo-1B models as the trainable example encoders in the implementation of the prediction method by Jin & Ren (2024) that relies on inner products of trained example representations. At inference, given an upstream example, we compute the averaged dot-product with all examples in the learned task. We note that at inference time the approach does not require ground truth forgetting of a small number of examples. For a fair comparison with other matrix completion methods, we replace the prediction of the approach with ground truth forgetting on these examples.

Replaying upstream examples in fine-tuning. We sparsely replay 1 mini-batch of 8 upstream examples every 32 steps of model update while fine-tuning on new tasks. Given predicted or ground truth forgetting $z_{i,1..J}$ on upstream examples $x_{1..J}$ when learning a new task T_i , we sample upstream examples to replay from a categorical distribution where $p(x_j) \propto \exp(z_{i,j}/\tau)$, where τ is a temperature hyperparameter set as 0.1. The hyperparameter τ is tuned on a single validation task by using ground truth forgetting Z .

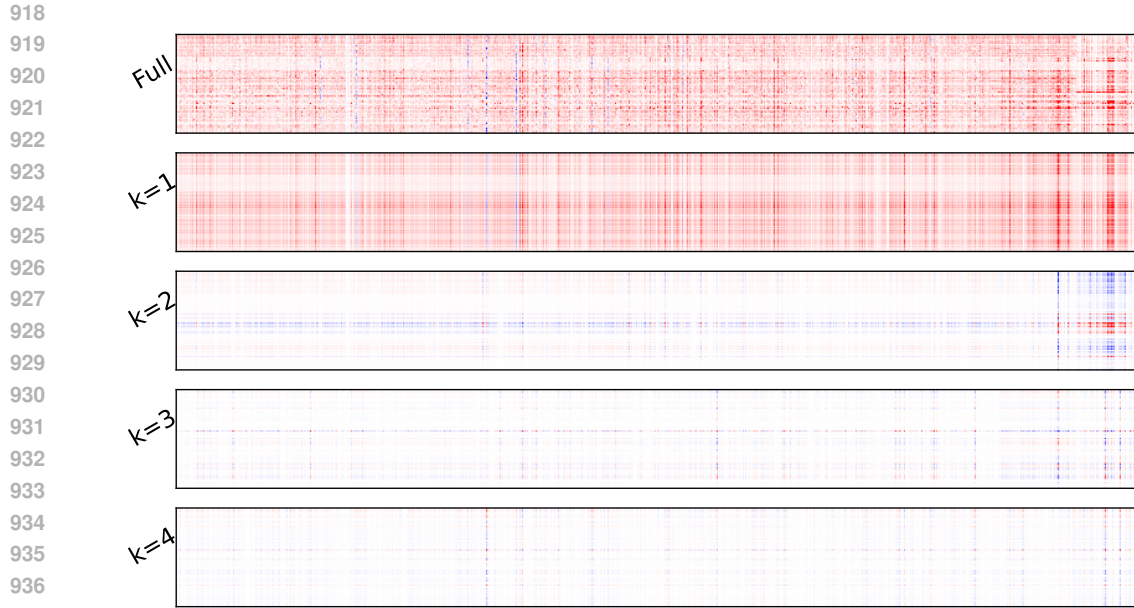

(a) OLMo-7B (Full)

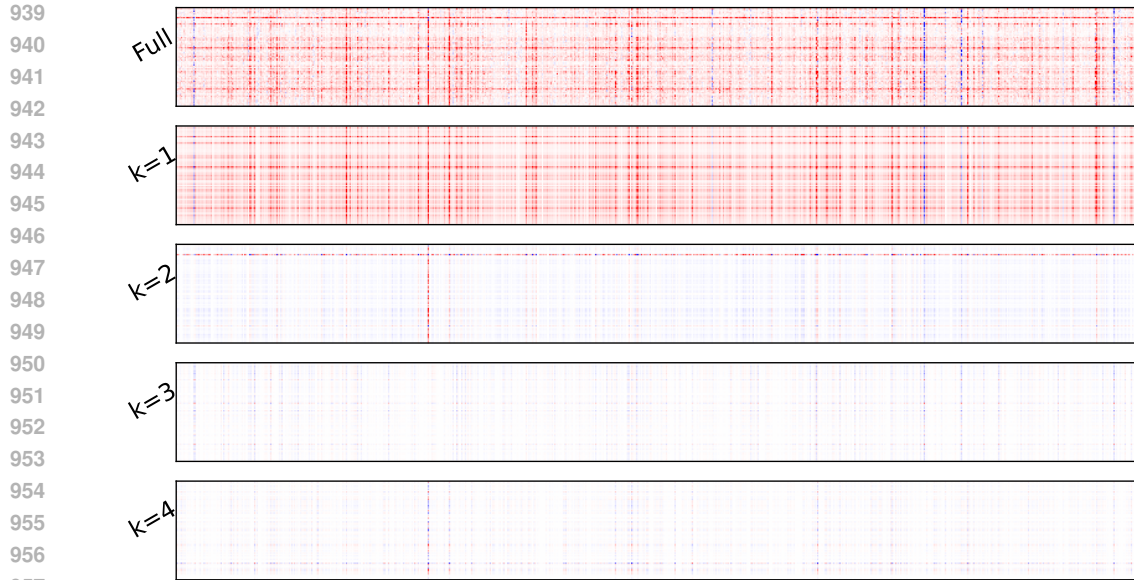

(b) OLMo-7B (LoRA)

958
959
960
961
962
963
964
965
966
967
968
969
970
971

Figure 9: Reconstruction of Z in OLMo-7B experiments with k -th singular value and vectors. Higher values of k capture finer-grained details in Z .

Table 4: Downstream task performance of OLMo-7B models before and after fine-tuning on dolly tasks.

	ARC-Easy	ARC-Challenge	Boolq	Hellaswag	Openbookqa	Piqa	Sciq	Winogrande
Metrics	Acc-norm	Acc-norm	Acc	Acc-norm	Acc-norm	Acc-norm	Acc-norm	Acc
Before FT	68.77	40.36	72.41	75.65	42.20	79.54	88.60	66.29
No Replay	67.34	42.28	74.82	76.89	44.65	80.05	84.09	67.89
Random	67.48	42.43	74.33	77.26	44.88	79.97	84.77	67.33
KNN-Offline	67.49	42.24	74.33	77.07	44.30	80.09	84.91	67.54

Table 5: Downstream task performance of OLMo-7B-Instruct models before and after fine-tuning on dolly tasks.

	MMLU-Pro	BBH	IF-Eval	MUSR	GPQA
Metrics	5-shot Acc	3-shot Acc-norm	0-shot Inst	0-shot Acc-norm	0-shot Acc-norm
Before FT	18.2	20.27	39.93	20.65	14.34
No Replay	17.51	20.26	17.72	22.01	14.37
Random	17.45	20.02	18.19	21.90	14.41
KNN-Offline	17.45	20.19	18.28	21.90	14.42

Table 6: Semantic meaning of k -th component in the SVD of the association matrix Z . We identify top relevant learned tasks and upstream example domains to k -th component in the SVD of the association matrix Z .

	OLMo-1B		OLMo-7B	
	Learned Tasks	More Forgotten Domain	Learned Tasks	More Forgotten Domain
$k = 1$	flan/paws_wiki flan/glue_mrpc flan/story_cloze	None	flan/squad_v2 flan/fix_punct tulu/open_orca	None
$k = 2$	flan/opinion_abstracts_idebate dolly/general_qa flan/story_cloze	StackOverflow	flan/mnli_matched flan/mnli_mismatched flan/snli	None
$k = 3$	flan/story_cloze flan/fix_punct flan/true_case	None	flan/squad_v2 flan/quac flan/fix_punct	None
$k = 4$	math_dataset dolly/general_qa flan/opinion_abstracts_idebate	None	flan/rte flan/opinion_abstracts_idebate flan/story_cloze	None

C DOWNSTREAM TASK EVALUATION WITH TASK-SPECIFIC METRICS

We evaluate downstream task performance of LMs before and after fine-tuning on 8 tasks from Dolly with LM-Evaluation-Harness framework (Gao et al., 2024). For OLMo-7B models, we evaluate on the same set of downstream tasks in OLMo technical report (Groeneveld et al., 2024). For OLMo-7B-Instruct models, we evaluate on Open LLM Leaderboard tasks⁴. For fine-tuned models, we compare no replay, replaying random examples, and replaying with forgetting predicted by offline KNN. Tables 4 and 5 summarize the results.

We notice that fine-tuning OLMo-7B on Dolly improves downstream performance on most of the downstream tasks. This aligns well with the purpose of fine-tuning a LM that is not instruction-tuned. Nevertheless, we notice performance degradation on two of the tasks, namely ARC-Easy and Sciq, which indicates forgetting. Although offline KNN achieves higher accuracy scores on these two tasks compared to no-replay (67.48 to 67.34, 84.91 to 84.09), we do not find the improvement statistically significant. For OLMo-7B-Instruct, fine-tuning on Dolly only improves performance on MUSR. The models clearly suffer from forgetting on the other tasks such as IFEval. Offline KNN achieves higher scores than random or no replay on IFEval (18.28 compared to 18.19 and 17.72), but we could not conclude about the significance of the improvement.

To summarize, we do not see clear performance improvement in downstream task performance (evaluated with task-specific metrics) by replaying random or chosen examples. We conjecture that replay-based approaches are not sufficient to mitigate forgetting on their own, and can be combined with other approaches such as careful learning rate scheduling or parameter regularization. We leave more effective algorithms to mitigate downstream task forgetting with predicted forgetting as future works.

D TOWARDS INTERPRETING FINE-GRAINED ASSOCIATIONS

We visualize progressive reconstruction with k -th singular value and singular vectors for OLMo experiments in Figure 9. The visualization exemplifies complicated associations that is not captured by the simple multiplicative model ($k = 1$). For example, on OLMo-7B (LoRA) and when $k = 2$, we see a single row and column with significantly larger forgetting than the others.

Semantic meanings of k -th component in the SVD of the association matrix Z . We perform further analysis into the patterns captured by the k -th singular value and singular vectors by identifying the most relevant learned tasks and upstream example domain to the component. For each k and its corresponding component $\hat{Z}_k = s_k \alpha_k \beta_k^T$, we extract top 3 rows with the highest mean (*i.e.*, top 3 relevant learned tasks T_i). We also extract top 50 columns with highest mean (*i.e.* top 50 relevant upstream examples) and the domain where these upstream examples are drawn from. For OLMo models, the domains are one of C4, common-crawl, Gutenberg books, Reddit, Science, StackOverFlow, and Wikipedia. We compare the distribution of domains in the top 50 upstream examples, and perform a z -test to determine upstream example domain that is significantly more forgotten compared to a prior domain distribution of top 50 most forgotten upstream examples (columns with highest mean in Z). The results are summarized in Table 6.

We highlight some notable patterns in Table 6. (1) Some component Z_k highlights forgetting patterns of upstream examples from certain domains. On OLMo-1B, the second component ($k = 2$) highlights patterns where StackOverFlow examples are forgotten. (2) Some component Z_k highlight forgetting when learning specific types of tasks. For example, the second component ($k = 2$) on OLMo-7B highlights forgetting patterns after learning NLI tasks (mnli_matched, mnli_mismatched, snli). This also exemplifies how learning similar tasks cause a similar set of upstream examples to be more forgotten. We believe a more comprehensive interpretation of the patterns of forgetting is an interesting and challenging future work.

³<https://github.com/NicolasHug/Surprise/tree/v1.1.3>

⁴https://huggingface.co/docs/leaderboards/open_llm_leaderboard/about

1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133

Task Category	Task	Task Category	Task
FLAN/Classification	aeslc	FLAN/QA	arc_challenge*
	ag_news_subset		arc_easy*
	imdb_reviews		bool_q
	sentiment140		coqa*
	sst2		cosmos_qa
	trec*		math_dataset*
FLAN/Linguistic	yelp_polarity_reviews*		natural_questions*
	cola		openbookqa*
	definite_pronoun_resolution*		piqa
	fix_punct*		trivia_qa*
	true_case	FLAN/Summarization	cnn_dailymail
	word_segment		gigaword
	wsc*		multi_news
FLAN/Generation	common_gen		samsun
	copa	FLAN/Translation	wiki_lingua_english_en
	dart		para_crawl_enes
	e2e_nlg*		wmt14_enfr
	hellaswag		wmt16_translate_csen
	opinion_abstracts_idebate*		wmt16_translate_deen
	opinion_abstracts_rotten_tomatoes		wmt16_translate_fien
	story_cloze		wmt16_translate_roen
	web_nlg_en		wmt16_translate_ruen*
FLAN/MRC	drop		wmt16_translate_tren*
	multirc	Tulu	open_orca
	quac		oasst1
	record		lima
	squad_v1		code_alpaca
	squad_v2		gpt4_alpaca
FLAN/NLI	anli_r1		cot
	anli_r2		science
	anli_r3		flan_v2
	cb*		sharegpt
	mnli_matched		hard_coded
	mnli_mismatched		wizardlm
	qnli*	Dolly	brainstorming
	rte		closed_qa
	sqli		information_extraction
	wnli		classification
FLAN/Paraphrase	glue_mrpc		open_qa
	glue_qqp*		general_qa
	paws_wiki		creative_writing
	stsb		summarization
	wic*		

Table 7: The list of learned tasks in our experiments on OLMo-1B, OLMo-7B and MPT-7B. * notes for tasks used as the in-domain test split in forgetting prediction experiments in Sec. 4.

1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187

Task Category	Task	Task Category	Task
MMLU	abstract_algebra	BBH	boolean_expressions*
	anatomy		causal_judgement
	astronomy		date_understanding
	business_ethics		disambiguation_qa
	clinical_knowledge		dyck_languages*
	college_biology*		formal_fallacies*
	college_chemistry		geometric_shapes
	college_computer_science		hyperbaton*
	college_mathematics		logical_deduction_five_objects*
	college_medicine*		logical_deduction_seven_objects
	college_physics		logical_deduction_three_objects
	computer_security		movie_recommendation*
	conceptual_physics*		multistep_arithmetic_two
	econometrics		navigate
	electrical_engineering		object_counting*
	elementary_mathematics		penguins_in_a_table
	formal_logic		reasoning_about_colored_objects
	global_facts*		ruin_names
	high_school_biology*		salient_translation_error_detection
	high_school_chemistry		snarks
	high_school_computer_science		sports_understanding
	high_school_european_history*		temporal_sequences
	high_school_geography		tracking_shuffled_objects_five_objects
	high_school_government_and_politics		tracking_shuffled_objects_seven_objects
	high_school_macro_economics		tracking_shuffled_objects_three_objects
	high_school_mathematics		web_of_lies
	high_school_microeconomics		word_sorting
	high_school_physics*	TruthfulQA	Nutrition
	high_school_psychology		Stereotypes
	high_school_statistics		Confusion
	high_school_us_history*		Psychology
	high_school_world_history		Language
	human_aging*		Sociology
	human_sexuality*		Finance
	international_law		Indexical Error
	jurisprudence		Science
	logical_fallacies*		Misconceptions
	machine_learning		Economics
	management*		Education
	marketing*		Proverbs
	medical_genetics		Conspiracies
	miscellaneous		Religion
	moral_disputes		Statistics
	moral_scenarios*		Misquotations
	nutrition		Subjective
	philosophy*		Law
	prehistory		History
	professional_accounting		Fiction
	professional_law		Mandela Effect
	professional_medicine*		Politics
	professional_psychology		Misinformation
	public_relations*		Logical Falsehood
	security_studies		Distraction
	sociology*		Weather
	us_foreign_policy*		Myths and Fairytales
	virology		Superstitions
	world_religions		Advertising
			Paranormal
			Health

Table 8: The list of learned tasks in our experiments on OLMo-7B-Instruct. * notes for tasks used as the in-domain test split in forgetting prediction experiments in Sec. 4.