

# Cross-domain Named Entity Recognition via Graph Matching

Anonymous ACL submission

## Abstract

Cross-domain NER is a practical yet challenging problem since the data scarcity in the real-world scenario. A common practice is first to learn a NER model in a rich-resource general domain and then adapt the model to specific domains. Due to the mismatch problem between entity types across domains, the wide knowledge in the general domain can not effectively transfer to the target domain NER model. To this end, we model the label relationship as a probability distribution and construct label graphs in both source and target label spaces. To enhance the contextual representation with label structures, we fuse the label graph into the word embedding output by BERT. By representing label relationships as graphs, we formulate cross-domain NER as a graph matching problem. Furthermore, the proposed method has good applicability with pre-training methods and is potentially capable of other cross-domain prediction tasks. Empirical results on four datasets show that our method outperforms a series of transfer learning, multi-task learning, and few-shot learning methods.

## 1 Introduction

Named entity recognition (NER) is a crucial component in many language understanding tasks (Shaalan, 2014; Nadeau and Sekine, 2007) and is often applied in various domains. Due to the data scarcity in the real-world scenario, obtaining adequate domain-specific data is usually expensive and time-consuming. Hence, cross-domain NER, which is capable of adapting NER models to specific domains with limited data, has been drawing increasing attention in recent years.

However, one of the primary challenges of cross-domain NER is the mismatch between source and target domain labels (Yang and Katiyar, 2020). For example, the label sets between ATIS (Hakkani-Tür et al., 2016) and CoNLL 2003 are non-overlapping. To address this issue, some approaches utilize

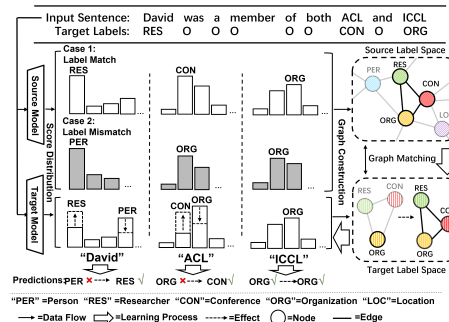


Figure 1: A demonstration of graph matching. In both two cases, our model learns graph structures from the source label space and makes correct predictions. In two label spaces, each node is a target label and the matching nodes and edges are opaque.

multi-task learning (Jia and Zhang, 2020; Wang et al., 2020) for transferring knowledge across domains. However, these methods require full training on both source and target domain data when adapting to each new domain. Since the source domain dataset is usually much larger than the target domain dataset, the multi-task learning methods are inefficient when adapting to low-resource domains.

Recently, as Pre-trained Language Models (PLMs) such as BERT (Devlin et al., 2019) have shown remarkable success in NER, transfer-learning-based methods also show effectiveness for cross-domain NER. A typical approach is to first train a NER model initialized with PLM on rich-resource domain (e.g., CoNLL 2003 (Sang and Meulder, 2003)), and then fine-tune the entire model with a new task-specific linear classifier (*pre-train fine-tune*) (Lee et al., 2018; Rodríguez et al., 2018). Despite its simplicity, this approach provides strong results on several benchmarks (Huang et al., 2020), and we serve it as the baseline in our research.

Inspired by the idea in You et al. (2020), where labels across domains are connected by probability distributions, we propose a novel approach, Label

067 **Structure Transfer for cross-domain NER (LST-**  
068 **NER)** to address the label mismatch problem. By  
069 modeling the label relationships as *label graphs*,  
070 we transfer the label structure from the source  
071 model (*i.e.*, the NER model trained on source do-  
072 main) to the target model (*i.e.*, fine-tuned model).  
073 We are the first to capture label graph structures for  
074 cross-domain NER to our best knowledge. In this  
075 study, we focus on enhancing cross-domain ability  
076 based on *pretrain-finetune* training paradigm, with  
077 **only** target domain labeled data for domain adapta-  
078 tion. Therefore, pre-training (Liu et al., 2021) and  
079 self-training (Huang et al., 2020) based methods,  
080 which leverages massive unlabeled data, are not  
081 considered.

082 To explicitly capture the connections between  
083 two domains labels, we construct a *label graph* by  
084 probability distributions of target labels estimated  
085 by the source NER model. In the *label graph*,  
086 graph nodes refer to target labels, and edges refer  
087 to the relationships between labels. We represent  
088 each node as the probability distribution and add an  
089 edge between two nodes if the labels have similar  
090 distributions. By representing label relationships as  
091 *label graphs* in both source and target label spaces,  
092 the label knowledge can be transferred via graph  
093 matching. We introduce Gromov-Wasserstein dis-  
094 tance (GWD) for aligning two *label graphs* since  
095 its capability of capturing edge similarity.

096 We show an example in Fig 1 to demonstrate how  
097 graph matching works. In the example, "ACL" is  
098 a "Conference" named entity in the target domain.  
099 When label sets between source and target domains  
100 match perfectly, the source NER model naturally  
101 predicts "Conference" with the highest probability.  
102 Then, the target model straightforward learns this  
103 property from the source domain. When two label  
104 sets are mismatching, the source NER model may  
105 predict "ACL" as an "Organization" since the label  
106 "Organization" is seen in the source domain. By  
107 score distributions of "ICCL" and "David" in the  
108 source domain, we can model their relationships  
109 with "ACL" as graph structures. Then, the target  
110 model learns label structures via graph matching  
111 and predicts "ACL" as "Conference" correctly. In  
112 this way, the label relationships can be learned even  
113 when two domain label sets are different.

114 Furthermore, we enhance the contextual repre-  
115 sentation by fusing the constructed *label graph* into  
116 the word embedding by Graph Convolutional Net-  
117 work (GCN), where an auxiliary task is introduced

118 for better extracting label-specific components for  
119 each entity type.

120 We performed extensive experiments on eight  
121 different domains in both rich- and low-resource  
122 settings. Empirical results show that our method  
123 outperforms a series of competitive baselines.

## 2 Related Work 124

**Cross-domain NER.** In recent years, cross-  
125 domain NER has received increasing research at-  
126 tention. There is a line of researches based on  
127 multi-task learning (Yang et al., 2017). Some  
128 approaches proposed adding auxiliary tasks Liu  
129 et al. (2020a); Wang et al. (2020), while some  
130 approaches proposed new model architecture (Jia  
131 et al., 2019; Jia and Zhang, 2020) for improving  
132 target domain NER model by jointly training on  
133 both source and target domain data. Jia and Zhang  
134 (2020) presented a multi-cell compositional LSTM  
135 (Multi-Cell LSTM) structure where modeled each  
136 entity type as a separate cell state, and it reaches  
137 the state-of-the-art (SOTA) performance for cross-  
138 domain NER. These methods require training on  
139 massive source domain data when adapting to each  
140 domain and thus inefficient.

142 Another line of researches is based on trans-  
143 fer learning. Except from the *pretrain-finetune*  
144 paradigm, some approaches proposed adding adap-  
145 tion layers Lin and Lu (2018) or adapter modules  
146 Hously et al. (2019) to the backbone network.  
147 Compared with them, our method constructs *la-*  
148 *bel graphs* dynamically and performs label seman-  
149 tic fusion via attention mechanism, and thus has  
150 fewer parameters for training. Besides, our method  
151 is built on word contextual embedding by PLM.  
152 Therefore, our model can combine with various  
153 backbone networks and thus has better applicabil-  
154 ity.

**Few-shot NER.** Few-shot NER aims at recog-  
155 nizing new categories in a highly low-resource sce-  
156 nario (Feng et al., 2018), which also shows good  
157 cross-domain ability. Tong et al. (2021) induced  
158 different undefined classes from the "Others" class  
159 to alleviate the over-fitting problem. Yang and Kati-  
160 yar (2020) proposed NNShot and StructShot based  
161 on the nearest neighbor classifier, and StructShot  
162 further applies the Viterbi algorithm when decod-  
163 ing. The few-shot learning methods focus on build-  
164 ing models that can generalize from very few ex-  
165 amples. Unlike these methods, our approach aims  
166 to enhance domain adaptation ability in both low-  
167

resource and rich-resource scenarios.

### 3 Methodology

#### 3.1 Problem Formulation

We focus on only one source and one target domain in this study. Given a NER model  $f_0$  pre-trained on a source dataset  $\mathcal{D}_s = \{(x_s^i, y_s^i)\}_{i=1}^{m_s}$ , we aim to fine-tune  $f_0$  by a target dataset  $\mathcal{D}_t = \{(x_t^i, y_t^i)\}_{i=1}^{m_t}$ . Following You et al. (2020), we assume that only  $\mathcal{D}_t$  and  $f_0$  are available when fine-tuning since  $\mathcal{D}_s$  is often large-scale.

Because the source label set  $\mathcal{Y}_s$  and target label set  $\mathcal{Y}_t$  may be mismatching,  $f_0$  can not be applied to target data directly. A common practice is to split  $f_0$  into two parts: a backbone network for learning general representation and task-specific layers for mapping representation to label space. We adopt BERT as our backbone model and Fully-Connected (FC) layer as the task-specific layer throughout our research. We show a demonstration of our model in Fig. 2.

#### 3.2 Label Graph Construction

In this part, we construct *source graph* and *target graph* with the probabilistic outputs of source and target NER models respectively.

Typically, the target labels are fine-grained and domain-specific, while the source labels are coarse-grained and more general. Similar to the idea of You et al. (2020), we map each target label as a probability distribution of the source labels. A straightforward method for obtaining this mapping (*i.e.* conditional distribution)  $p(y_s|y_t = y)$  is to average the predictions of the source model over all samples for each target entity type. Formally, we have

$$\begin{aligned} p(y_s|y_t = y) &\approx |\mathcal{D}_t^y|^{-1} \sum_{(x_t, y_t) \in \mathcal{D}_t^y} f_0^y(x_t) \\ f_0^y(x_t) &= \text{softmax}(f_0(x_t)/T) \quad (1) \\ \mathcal{D}_t^y &= \{(x_t, y_t) \in \mathcal{D}_t | y_t = y\}, \end{aligned}$$

where  $y_s/y_t$  denotes source/target label,  $T$  denotes the temperature parameter for smoothing the probability distribution and  $|\mathcal{D}_t^y|$  is the number of target domain training samples<sup>1</sup> with ground-truth label  $y$ . The pre-trained model  $f_0$  is regarded as a probabilistic model for approximating the probability distribution  $p(y_s|x_t)$  over source labels  $\mathcal{Y}_s$ .

<sup>1</sup>The training sample refers to one token and its ground-truth label

Next, we build *source graph*  $\mathcal{G}_s(\mathcal{V}_s, \mathcal{E}_s)$  where nodes refer to target labels and edges refer to semantic similarity between nodes. As illustrated in Fig 1, two labels with similar semantic meanings (*i.e.*, "Conference" and "Organization") have the similar probability distribution. Based on this feature, we represent the graph node with label  $y$  as

$$\begin{aligned} \tilde{v}_s^y &= \left[ p(y_s^{(1)}|y_t = y), \dots, p(y_s^{(i)}|y_t = y) \right] \quad (2) \\ y_s^{(i)} &\in \mathcal{Y}_s, i \in \{1, \dots, |\mathcal{Y}_s|\} \end{aligned}$$

where  $\tilde{v}_s^y \in \mathbb{R}^{|\mathcal{Y}_s|}$  is the node representation and  $|\mathcal{Y}_s|$  is the number of source labels. To eliminate the influence of scales of different dimensions, we normalize the graph nodes by dividing the average distance of node pairs, and  $l2$  distance is used as the distance metric. Then, the graph node representation for label  $y$  is calculated as

$$v_s^y = \frac{\tilde{v}_s^y * |\mathcal{Y}_t|^2}{\sum_{y_1, y_2} l2(\tilde{v}_s^{y_1}, \tilde{v}_s^{y_2})}, \quad (3)$$

where  $v_s^y \in \mathcal{R}^{|\mathcal{Y}_s|}$  is the normalized node representation,  $|\mathcal{Y}_t|$  is the number of target labels and  $l2$  is the distance function. Then, we add edge between two nodes if and only if their distance is smaller than a threshold  $\delta$ .

$$e_s^{y_1, y_2} = \begin{cases} l2(v_s^{y_1}, v_s^{y_2}), & \text{if } l2(v_s^{y_1}, v_s^{y_2}) < \delta; \\ \infty, & \text{else.} \end{cases} \quad (4)$$

In a similar way as *source graph*, we construct *target graph*  $\mathcal{G}_t(\mathcal{V}_t, \mathcal{E}_t)$  by the fine-tuned model  $f$  where probability distribution  $p(y_t|x)$  over target labels  $\mathcal{Y}_t$  are estimated. In *target graph*, nodes refer to target labels, and edges refer to semantic similarity measured in target label space.

#### 3.3 Label Semantics Fusion

Commonly in NER, the ground-truth label of a named entity is related to the context (*e.g.*, label "Researcher" can be inferred by label "Conference" as the example shown in Fig 1). In this part, we fused the learned graph structure into the word contextual embedding output by BERT to model the sentence's semantic label relationships.

Given a sentence  $X = [x_1, \dots, x_{n_s}]$  with ground-truth label sequence  $Y$ , the contextual representation  $h_j \in \mathbb{R}^{d_h}$  for each token can be obtained by backbone network. Then, we randomly initialize the *label representation*  $c_i \in \mathbb{R}^{d_c}$  before

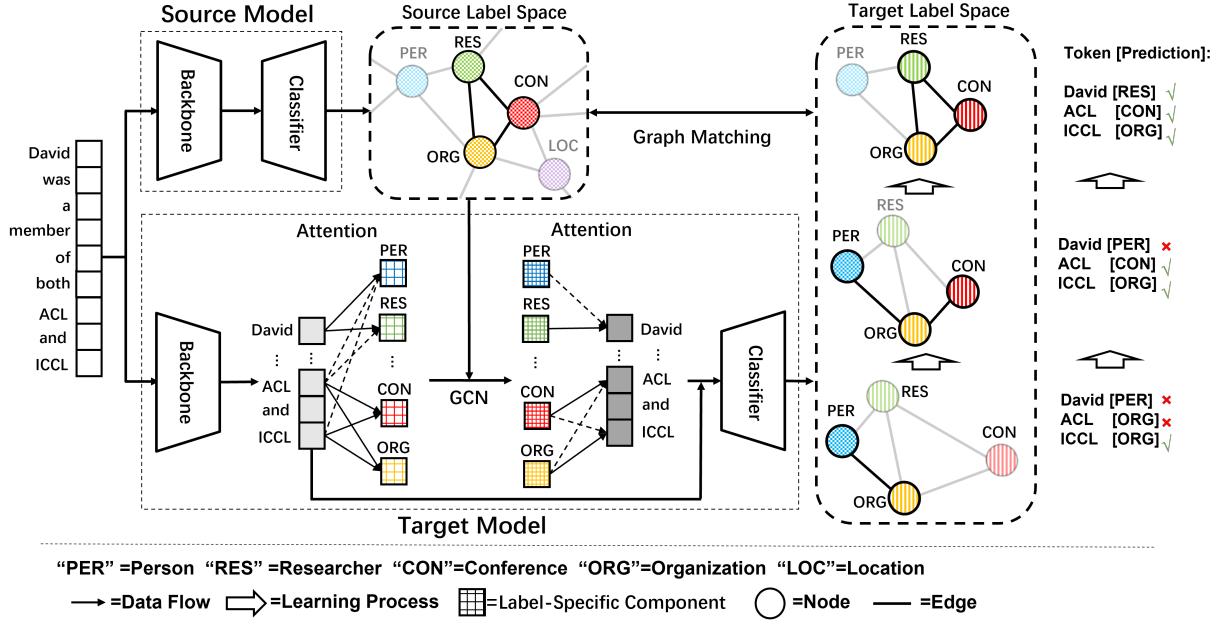


Figure 2: A demonstration of the proposed model. First, the label graph from source label space is incorporated into the contextual representation by GCN. Then, the target model transfers graph structures from the source model via graph matching. Finally, the target model makes correct predictions with the learned label structures.

fine-tuning. The *label representation* represents the semantic meanings for each entity type, and it is learned during fine-tuning. For the sentence  $X$ , we apply a label-guided attention mechanism to extract the *label-specific components* as follow:

$$\begin{aligned}
 \mathbf{q}_j &= \mathbf{h}_j \mathbf{W}_p + \mathbf{b}_p, \\
 \alpha_{ij} &= \frac{\exp(\mathbf{q}_j \mathbf{c}_i^T)}{\sum_j \exp(\mathbf{q}_j \mathbf{c}_i^T)}, \\
 \mathbf{u}_i &= \sum_j \alpha_{ij} \mathbf{q}_j,
 \end{aligned} \quad (5)$$

where  $\mathbf{q}_j \in \mathbb{R}^{d_p}$  is the *label-related embedding* for the  $j$ -th token in the sentence,  $\mathbf{W}_p \in \mathbb{R}^{d_h \times d_p}$  and  $\mathbf{b}_p \in \mathbb{R}^{d_p}$  are the weight and bias for projection respectively.  $\mathbf{u}_i \in \mathbb{R}^{d_p}$  denotes the *label-specific component* for the  $i$ -th label in  $\mathcal{Y}_t$  and  $\alpha_{ij}$  indicates how informative the  $j$ -th token to the  $i$ -th label. For each sentence, *label-specific components* modeling its semantic relevance to each entity type.

And then, by replacing the node representation of *source graph* from probability distribution  $\mathbf{v}_s$  to *label-specific component*  $\mathbf{u}$ , we obtain the graph representation of *label-specific components*. Next, we utilize GCN (Kipf and Welling, 2017) to enhance the representations of each *label-specific component* by propagating messages between neighboring nodes.

$$\mathbf{u}' = \text{GCN}(\mathbf{u}) \quad (6)$$

$\mathbf{u}' \in \mathbb{R}^{d_p}$  denotes the aggregated node representation of the *label-specific component* and GCN denotes the graph convolution operations where details are omitted for simplicity. As shown in Fig. 2, label structure from *source graph* is fused into *label-specific components* by GCN.

Last, we utilize the token-guided attention mechanism to fuse the aggregated *label-specific component* into the contextual representation for each word:

$$\begin{aligned}
 \beta_{ji} &= \frac{\exp(\mathbf{q}_j \mathbf{u}_i'^T)}{\sum_i \exp(\mathbf{q}_j \mathbf{u}_i'^T)} \\
 \mathbf{h}'_j &= \mathbf{h}_j + \left( \sum_i \beta_{ji} \mathbf{u}_i' \right) \mathbf{W}'_p + \mathbf{b}'_p.
 \end{aligned} \quad (7)$$

$\mathbf{h}'_j \in \mathbb{R}^{d_h}$  is the *label-fused embedding* for the  $j$ -th token and  $\mathbf{W}'_p \in \mathbb{R}^{d_p \times d_h}$ ,  $\mathbf{b}'_p \in \mathbb{R}^{d_h}$  are the weight and bias for projection respectively. In Eq. 7, we map the weighted sum of  $\mathbf{u}'$  into the same space of  $\mathbf{h}_j$  and add them together to allow information fusion. Followed by the task-specific FC layer, the classification loss for NER tasks can be calculated:

$$\mathcal{L}_{cls} = \text{CE}(\text{FC}(\mathbf{h}'), Y) \quad (8)$$

where  $\text{CE}$  denotes the Cross-Entropy loss.

Besides, we introduce an auxiliary task to ensure the *label-specific components* focus on correct entity types. Concretely, the model predicts what

entity types appear in the sentence, which is a multi-label classification task. The loss for the auxiliary task is calculated as

$$\mathcal{L}_{aux} = BCE(FC_{aux}(Cat([\mathbf{h}'_1, \dots, \mathbf{h}'_{n_s}])), Y') \quad (9)$$

where  $BCE$  is the Binary-Cross-Entropy loss,  $FC_{aux}$  is the FC layer for auxiliary task,  $Cat$  is the concatenation operation for last dimension and  $Y'$  is the ground-truth label for the sentence. Different from  $\mathcal{L}_{cls}$ ,  $\mathcal{L}_{aux}$  encourages model to extract correct *label-specific components* for each sentence.

### 3.4 Graph Structure Matching

Since *source graph*  $\mathcal{G}_s$  is constructed by the pre-trained LM  $f_0$ , it naturally contain priori knowledge from rich-resource domain. In this part, we utilize the *label graphs* built in different label spaces for graph matching to exploit the semantic relations among labels from *source graph*.

Gromov-Wasserstein distance (GWD) is proposed for distributional metric matching by [Peyré et al. \(2016\)](#). Since its capability of capturing edge similarity between graphs, GWD has been applied to graph matching ([Vayer et al., 2019](#); [Chowdhury and Mémoli, 2019](#)) and domain alignment ([Chen et al., 2020](#)). Naturally, we can adopt GWD for matching the edges (relationships) between two *label graphs*.

Following [Alvarez-Melis and Jaakkola \(2018\)](#); [Chen et al. \(2020\)](#), we convert each graph to a discrete distribution with uniform mass on each node. Let  $\mu, \nu$  denote two discrete distributions corresponding to  $\mathcal{G}_s, \mathcal{G}_t$  respectively. Then, we define the GWD between  $\mu$  and  $\nu$  as:

$$\begin{aligned} \mathbf{D}_{gw}(\mu, \nu) &= \inf_{\gamma \in \Pi(\mu, \nu)} \mathbb{E}_{(\mathbf{v}_s, \mathbf{v}_t) \sim \gamma, (\mathbf{v}'_s, \mathbf{v}'_t) \sim \gamma} [L(\mathbf{v}_s, \mathbf{v}_t, \mathbf{v}'_s, \mathbf{v}'_t)] \\ &= \min_{\hat{\mathbf{T}} \in \Pi(\mathbf{u}, \mathbf{v})} \sum_{i, i', j, j'} \hat{\mathbf{T}}_{ij} \hat{\mathbf{T}}_{i'j'} L(\mathbf{v}_s^i, \mathbf{v}_t^j, \mathbf{v}'_s^{i'}, \mathbf{v}'_t^{j'}), \end{aligned} \quad (10)$$

where  $\Pi(\mu, \nu)$  denotes all the joint distributions  $\gamma(\mathbf{v}_s, \mathbf{v}_t)$  with marginals  $\mu(\mathbf{v}_s)$  and  $\nu(\mathbf{v}_t)$ .  $\Pi(\mathbf{u}, \mathbf{v})$  represents the space of all valid transport plan, where the weight vector  $\mathbf{u} = \{u_i\}_{i=1}^n$ ,  $\mathbf{v} = \{v_i\}_{i=1}^m$  is the  $n$ - and  $m$ -dimensional simplex for distribution  $\mu, \nu$ . The matrix  $\mathbf{T}$  is the transport plan, where  $\mathbf{T}_{ij}$  represents the amount of mass shifted from  $u_i$  to  $v_j$ .  $L(\cdot)$  is the cost function evaluating the intra-graph structural similarity between two pairs of nodes  $(\mathbf{v}_s^i, \mathbf{v}_t^j)$  and  $(\mathbf{v}'_s^{i'}, \mathbf{v}'_t^{j'})$ , and it is

defined as follow in the proposed method:

$$L(\mathbf{v}_s^i, \mathbf{v}_t^j, \mathbf{v}'_s^{i'}, \mathbf{v}'_t^{j'}) = |l_2(\mathbf{v}_s^i, \mathbf{v}'_s^{i'}) - l_2(\mathbf{v}_t^j, \mathbf{v}'_t^{j'})| \quad (11)$$

By projecting the edges into nodes, the learned transport plan  $\hat{\mathbf{T}}$  helps align the edges in different graphs ([van Lint and Wilson, 1992](#)). Then, label relationships (edges) can be learned from *source graph* to *target graph* by minimizing  $\mathbf{D}_{gw}$  with Sinkhorn algorithm ([Cuturi, 2013](#); [Peyré et al., 2019](#)). In Fig. 2, the fine-tuned model learns the structure between labels (*i.e.*, "Conference", "Organization" and "Researcher"), and makes correct predictions with the learned label relationships. When fine-tuning, *target graph* evolves dynamically through the update of the parameters of NER model  $f$ , while *source graph* and the source model  $f_0$  are frozen.

### 3.5 Total Learning Objective

Finally, the total loss can be formulated as

$$\mathcal{L} = \mathcal{L}_{cls} + \lambda_1 \mathcal{L}_{aux} + \lambda_2 \mathbf{D}_{gw}, \quad (12)$$

where the loss of auxiliary task and GWD are weighted by  $\lambda_1$  and  $\lambda_2$  respectively.

## 4 Experiments

### 4.1 Experimental Settings

**Datasets.** We take five public publicly available datasets for experiments, including CoNLL 2003 ([Sang and Meulder, 2003](#)), CrossNER ([Liu et al., 2021](#)), ATIS ([Hakkani-Tür et al., 2016](#)), MIT Restaurant ([Liu et al., 2013a](#)) and MIT Movie ([Liu et al., 2013b](#)). Table 1 presents detailed statistics of these datasets.

**Baseline models.** We first consider three approaches built on bi-directional LSTM structure ([Hochreiter and Schmidhuber, 1997](#)), including traditional NER system BiLSTM-CRF ([Lample et al., 2016](#)) together with two improved methods Coach ([Liu et al., 2020b](#)) and Multi-Cell LSTM ([Jia and Zhang, 2020](#)).

We also compare several BERT-based NER systems. BERT-tagger ([Devlin et al., 2019](#)) is the BERT-based baseline model which fine-tunes the BERT model with a label classifier (*i.e.*, *pretrain-finetune*). NNShot and StructShot ([Yang and Katiyar, 2020](#)) are two metric-based few-shot learning approaches for NER. Different from the above approaches, TemplateNER ([Cui et al., 2021](#)) is a

Datasets	CoNLL 2003	MIT Movie	MIT Restaurant	ATIS	CrossNER					
Domain	News	Movie Reviews	Restaurant Reviews	Dialogue	Politics	Natural Science	Music	Literature	Artificial Intelligence	
#Train	15.0k	7.8k	7.7k	5.0k	200	200	100	100	100	
#Test	3.7k	2.0k	1.5k	893	651	543	456	416	431	
#Entity Type	4	12	8	79	10	17	13	11	12	

Table 1: Statistics on the 5 public datasets in our experiments

Samples	K=20								K=50							
	Pol.	Sci.	Mus.	Lit.	AI	Mov.	Res.	Dia.	Pol.	Sci.	Mus.	Lit.	AI	Mov.	Res.	Dia.
BiLSTM-CRF	41.75	42.54	37.96	35.78	37.59	49.98	49.65	92.32	53.46	48.89	43.65	41.54	44.73	56.13	58.11	94.28
BiLSTM-CRF-joint †	44.62	44.91	42.28	39.54	41.23	51.73	50.61	92.54	55.17	49.68	44.58	43.14	46.35	57.60	58.94	94.58
Coach †	46.15	48.71	43.37	41.64	41.55	45.83	49.56	92.74	60.97	52.03	51.56	48.73	51.15	56.09	57.50	94.69
Multi-Cell LSTM †	59.58	60.55	67.12	63.92	55.39	53.59	52.18	90.36	68.21	65.78	70.47	66.85	58.67	58.48	60.57	92.78
BERT-tagger	61.01	60.34	64.73	61.79	53.78	53.39	55.13	92.48	66.13	63.93	68.41	63.44	58.93	58.16	60.58	94.51
BERT-tagger-joint †	61.61	60.58	64.16	60.36	53.18	53.62	55.54	91.24	66.30	64.04	67.71	62.58	58.52	58.04	60.71	93.78
NNShot	60.93	60.67	64.21	61.64	54.27	52.97	55.23	91.65	66.33	63.78	67.94	63.19	59.17	57.34	60.26	93.86
StructShot	63.31	62.95	67.27	63.48	55.16	54.83	55.93	92.66	67.16	64.52	70.21	65.33	59.73	58.74	61.60	94.38
templateNER	63.39	62.64	62.00	61.84	56.34	40.15	47.82	58.39	65.23	62.84	64.57	64.49	56.58	43.42	54.05	59.67
LST-NER w/o $\mathcal{D}_{gw} + \mathcal{L}_{aux}$	60.56	60.72	65.10	62.26	54.02	53.18	55.35	91.43	65.95	63.76	68.77	64.22	58.72	58.41	60.54	94.44
LST-NER w/o $\mathcal{L}_{aux}$	62.91	62.55	66.98	63.73	56.31	56.11	57.32	92.66	68.19	64.42	70.17	66.13	59.86	60.33	62.73	94.74
LST-NER w/o $\mathcal{D}_{gw}$	62.16	62.39	66.28	63.85	55.82	55.27	56.92	92.87	67.63	64.94	69.76	65.24	59.12	59.56	62.21	94.59
LST-NER (Ours)	<b>64.06</b>	<b>64.03</b>	<b>68.83</b>	<b>64.94</b>	<b>57.78</b>	<b>57.83</b>	<b>58.26</b>	<b>93.21</b>	<b>68.51</b>	<b>66.48</b>	<b>72.04</b>	<b>66.73</b>	<b>60.69</b>	<b>61.25</b>	<b>63.58</b>	<b>94.94</b>

Table 2: Cross domain results on eight different domains in low-resource setting. † indicates both source and target labeled samples are used when training.

Domain	Mov.	Res.	Dia.
BiLSTM-CRF	67.16	77.49	95.10
BiLSTM-CRF-joint †	68.31	78.13	95.26
Coach †	67.62	77.82	95.04
Multi-Cell LSTM †	69.41	78.67	93.95
BERT-tagger	67.49	76.71	95.12
BERT-tagger-joint †	67.14	77.07	94.86
NNShot	60.39	72.33	95.04
StructShot	22.63	53.34	90.18
templateNER	54.63	69.94	64.92
LST-NER w/o $\mathcal{D}_{gw} + \mathcal{L}_{aux}$	67.29	76.63	95.04
LST-NER w/o $\mathcal{L}_{aux}$	68.53	77.65	95.20
LST-NER w/o $\mathcal{D}_{gw}$	68.49	77.86	95.27
LST-NER (Ours)	<b>70.25</b>	<b>78.74</b>	<b>95.41</b>

Table 3: Cross domain results on three different domains in rich-resource setting. † indicates both source and target labeled samples are used when training.

template-based prompt method through a generative pre-trained LM, BART (Lewis et al., 2020), and it also shows effectiveness in few-shot NER.

In the experiments, we don't include approaches requiring extra unlabeled data for comparison, such as noisy supervised pre-training, self-training (Huang et al., 2020) and domain-adaptive pre-training (Liu et al., 2021).

**Hyperparameters.** Throughout the experiments, we use BERT as the backbone network for our model and the following hyperparameters are used: temperature parameter  $T = 4$ ; dimensional parameters  $d_h = d_p = 768$ ; edge threshold  $\delta = 1.5$ ; weight parameters  $\lambda_1 = 0.1, \lambda_2 = 0.01$ .

**Evaluation.** For evaluation, we use the standard evaluation metrics for NER (i.e., micro averaged F1 score) and report the average results of five

independent runs. Besides, we use BIO tagging schema for evaluation.

In the low-resource setting, we construct the target domain training set by sampling  $K$  entities for each entity types following existing studies in few-shot NER (Yang and Katiyar, 2020; Cui et al., 2021). Different from sentence-level few-shot tasks, in NER, simply sampling  $K$  sentences for each entity type will result in far more entities of frequent types than those of less frequent types (Yang and Katiyar, 2020). Therefore, we apply greedy sampling strategy (Yang and Katiyar, 2020) to construct a few-shot training set. Due to the randomness of few-shot sampling, we will release all sampled data along with the codes for reproducibility.

## 4.2 Cross-Domain Experiments

**Cross-Domain Settings.** Following Huang et al. (2020); Liu et al. (2021), we use CoNLL 2003 as the source domain datasets and evaluate the cross-domain performance on other datasets with different domains. The MIT Movie, MIT Restaurant, and ATIS are three NER benchmark datasets. However, these three datasets lack domain-specialized entity types or do not focus on a specific domain (e.g., "Opinion", "Relationship", etc), leading to a less effective cross-domain evaluation (Liu et al., 2021). Thus, we additionally use CrossNER datasets (with five different domains) for the experiments. For each domain in CrossNER, it contains domain-

specialized entity types as well as the four entity types in CoNLL 2003<sup>2</sup>. Since the target domain contains far more entity types than the source domain, there is a mismatch between different domain label sets. Considering the statistics of the datasets, we perform experiments on movie reviews, restaurant reviews, and dialogue domains for the rich-resource setting (we use all samples for training) and all eight domains for the low-resource setting ( $K = 20, 50$ ). If an entity has a smaller number of samples than the fixed number to sample  $K$ , we use all of them for training.

**Training Details.** Based on the two baseline methods BiLSTM-CRF and BERT-tagger, we jointly train on both source and target domain samples to obtain two more baselines (*i.e.*, BiLSTM-CRF-joint and BERT-tagger-joint, respectively) for better comparison. Following Liu et al. (2021), we up-sample target domain samples for balancing two domain data. When training BiLSTM-CRF and Coach, we use word-level embedding from Pennington et al. (2014) and char-level embedding from Hashimoto et al. (2017) as input. For Multi-Cell LSTM, BERT representation, as well as word-level and char-level embedding, are utilized.

Except for the approaches based on multi-task learning (*i.e.*, BiLSTM-CRF-joint, Coach, Multi-Cell LSTM, and BERT-tagger-joint), we train the NER model on CoNLL 2003 for ten epochs before adapting to the target domain. For NNShot and StructShot, we further perform fine-tuning in the target domain since we find that they only yield better results than fine-tuning when only very few data are available (Huang et al., 2020). We summarize the results of cross-domain evaluation as well as the ablation study in Table 2 and 3, where methods are grouped together based on the backbone model (BiLSTM, BERT, BART from top to down respectively).

**Result Analysis.** Results show that our model consistently outperforms all the compared models in both low- and rich-resource settings. Our method shows significant improvements in the rich-resource setting on the baseline BERT-tagger (2.76% on Movie Review; 2.03% on Restaurant Review; 0.29% on Dialogue). Even though the multi-task-learning-based methods (*e.g.*, Multi-Cell LSTM) are trained on more data and show competitive results, the proposed method has superior performance with only target domain data.

<sup>2</sup>person, location, organization and miscellaneous

Results also suggest that jointly training pre-trained LM (*e.g.*, BERT) on both domains data may not have better performance on target domain compared with *pretrain-finetune* paradigm. We think that the reason may be the semantic discrepancy of the same label from two domains. Different from them, the proposed method captures both similarity and discrepancy between source and target labels through probability distributions. Therefore, our model benefits from the broad knowledge from the source NER model and alleviates the requirement to target domain data.

**Ablation Study.** We consider three settings in the ablation study, the final loss without (1) loss of auxiliary task  $\mathcal{L}_{aux}$ , (2) GWD for graph matching  $\mathcal{D}_{gw}$  and (3) both of them. One should note that the model trained in case (3) is not the same as BERT-tagger, which has label semantic fusion layers.

The results suggest that both the graph matching mechanism and label semantic fusion are beneficial for learning a better NER model. When training only with classification loss, the model shows tiny improvement on fine-tuning. Combined with learned graph structure (*i.e.*, *source graph*), the label semantic fusion part becomes more effective when auxiliary task is added. Moreover, the model trained with graph matching consistently yields better results, indicating that transferring the graph structure of labels is critical and beneficial for cross-domain NER.

Domain	Poli.	Sci.	Mus.	Lit.	AI	Aver.
BERT-tagger ‡	68.71	64.94	68.30	63.63	58.88	64.89
DAPT ‡	72.05	68.78	75.71	69.04	62.56	69.63
Multi-Cell LSTM ‡	70.56	66.42	70.52	66.96	58.28	66.55
Multi-Cell LSTM+DAPT ‡	71.45	67.68	74.19	68.63	61.64	68.72
LST-NER (Ours)	70.44	66.83	72.08	67.12	60.32	67.36
LST-NER+DAPT	<b>73.25</b>	<b>70.07</b>	<b>76.83</b>	<b>70.76</b>	<b>63.28</b>	<b>70.84</b>

Table 4: Comparison of different methods combined with DAPT. In each domain, we use **all** samples for training. ‡ indicates the results are from Liu et al. (2021).

### 4.3 Additional Experiments

**Combined with Domain-Adaptive Pre-Training.** Liu et al. (2021) proposed to use integrate the entity- and task-level unlabeled corpus and span-level masking strategy in Domain-Adaptive Pre-Training (DAPT) for the NER domain adaptation. We conduct experiments to combine DAPT with ours model and Multi-Cell LSTM, respectively. The results are shown in Table 4.

By pre-training on a massive domain-related corpus, our method further improves the F1-score

by 3.48% on average. Compared with Multi-Cell LSTM, our method benefits from rich knowledge learned by pre-train LM directly and shows better performance when combined with DAPT. Therefore, we believe that our method can be incorporated with self-training and noisy supervised pre-training methods to achieve superior results.

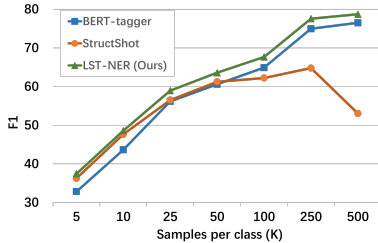


Figure 3: Comparisons when utilizing different amounts of data for training in "Restaurant Reviews" domain.

### Performance with Different Amounts of Data.

We evaluate the performance of our model with different amounts of target domain labeled data on the "Restaurant Reviews" domain and make comparisons with two baselines BERT-tagger and StructShot. We use the same few-shot sampling strategy as in the low-resource setting. From results in Fig 3, we find that even when in a highly low-resource scenario ( $K = 5, 10$ ), the proposed model shows competitive performance with the few-shot NER model StructShot. When more data are available, our model consistently outperforms both BERT-tagger and StructShot. In contrast, StructShot becomes ineffective when data are relatively sufficient ( $K > 50$ ). We think the reason may be that StructShot is based on nearest neighbor learning, which is susceptible to noisy data. The results indicate that our method enhances domain adaptation capability in a more general scenario compared with few-shot NER methods.

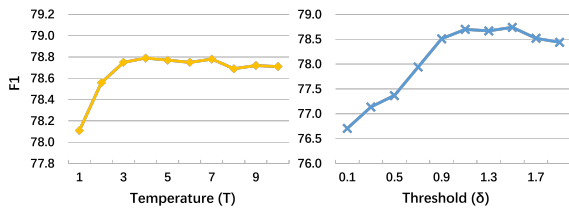



Figure 4: The impact of temperature  $T$  and edge threshold  $\delta$  to the performance in "Restaurant Reviews" domain.

**Hyperparameter Discussion.** We explore the impact of edge threshold  $\delta$ , temperature parameter  $T$  and weight parameter  $\lambda_1, \lambda_2$  on the performance.

We show the result in Fig. 4 and Fig. 6 in Appendix A. Temperature  $T$  controls the smoothness of the score distribution. The edge threshold  $\delta$  controls the number of edges for matching. We find that  $T$  and  $\delta$  have a relatively small influence on the f1 score when  $T > 3$  and  $\delta > 1.0$ , suggesting the stability of the model.

Sentence:	At the IEEE International Conference on Image Processing (IEEE ICIP), Rui Hu extended the HOG descriptor for use in sketch based image retrieval (SBIR).
BERT-tagger:	IEEE ICIP [Conference], Rui Hu [Person], HOG descriptor [Algorithm], SBIR [Misc]
Multi-Cell LSTM:	IEEE ICIP [Conference], Rui Hu [Researcher], HOG descriptor [Algorithm], SBIR [Misc]
LST (Ours):	IEEE ICIP [Conference], Rui Hu [Researcher], HOG descriptor [Algorithm], SBIR [Task]

(a) Example

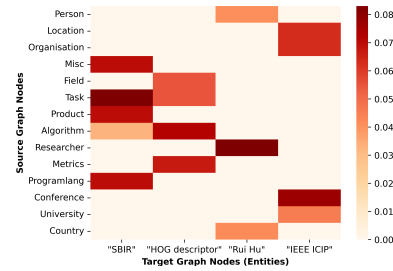

(b) Transport plan

Figure 5: (a) An example from the AI domain test set. Green and Red represent correct and incorrect entity respectively. (b) The transport plan corresponds to the example. A higher value represents more attention between nodes.

**Case Study.** In the example shown in Fig.5, the model constructs *source graph* with all target data where all target labels are contained. The transport plan demonstrates how label structures (edges) are learned via graph matching from all target entity types to the named entity in the sentence. Compared with BERT-tagger and Multi-Cell LSTM, our method correctly predicts "Rui Hu" as "Researcher" and "SBIR" as "Task".

## 5 Conclusion

This paper proposes a novel and lightweight transfer learning approach for cross-domain NER. Our proposed method learns graph structure via matching *label graphs* from source to target domain. Through extensive experiments, we demonstrated the effectiveness of our approach, reporting better results over a series of transfer learning, multi-task learning, few-shot learning methods. Furthermore, our approach is general, which can be combined with domain-adaptive pre-training and potentially applied to other cross-domain prediction tasks.



583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637

## References

David Alvarez-Melis and Tommi S. Jaakkola. 2018. Gromov-wasserstein alignment of word embedding spaces. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 1881–1890.

Liqun Chen, Zhe Gan, Yu Cheng, Linjie Li, Lawrence Carin, and Jingjing Liu. 2020. Graph optimal transport for cross-domain alignment. In *Proceedings of the International Conference on Machine Learning*.

Samir Chowdhury and Facundo Mémoli. 2019. The gromov–wasserstein distance between networks and stable network invariants. *Information and Inference: A Journal of the IMA*, 8(4):757–787.

Leyang Cui, Yu Wu, Jian Liu, Sen Yang, and Yue Zhang. 2021. Template-based named entity recognition using BART. In *Findings of the Association for Computational Linguistics*, volume ACL/IJCNLP 2021 of *Findings of ACL*, pages 1835–1845.

Marco Cuturi. 2013. Sinkhorn distances: Lightspeed computation of optimal transport. In *Advances in Neural Information Processing Systems*, pages 2292–2300.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*.

Xiaocheng Feng, Xiachong Feng, Bing Qin, Zhangyin Feng, and Ting Liu. 2018. Improving low resource named entity recognition using cross-lingual knowledge transfer. In *Proceedings of the International Joint Conference on Artificial Intelligence*, pages 4071–4077.

Dilek Hakkani-Tür, Gökhan Tür, Asli Celikyilmaz, Yun-Nung Chen, Jianfeng Gao, Li Deng, and Ye-Yi Wang. 2016. Multi-domain joint semantic frame parsing using bi-directional RNN-LSTM. In *Interspeech Annual Conference of the International Speech Communication Association*, pages 715–719.

Kazuma Hashimoto, Caiming Xiong, Yoshimasa Tsuruoka, and Richard Socher. 2017. A joint many-task model: Growing a neural network for multiple NLP tasks. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1923–1933.

Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural computation*, 9(8):1735–1780.

Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin de Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019. Parameter-efficient transfer learning for NLP. In

*Proceedings of the International Conference on Machine Learning*, Proceedings of Machine Learning Research. 638  
639  
640

Jiaxin Huang, Chunyuan Li, Krishan Subudhi, Damien Jose, Shobana Balakrishnan, Weizhu Chen, Baolin Peng, Jianfeng Gao, and Jiawei Han. 2020. Few-shot named entity recognition: A comprehensive study. *arXiv preprint arXiv:2012.14978*. 641  
642  
643  
644  
645

Chen Jia, Liang Xiao, and Yue Zhang. 2019. Cross-domain NER using cross-domain language modeling. In *Proceedings of the Conference of the Association for Computational Linguistics*, pages 2464–2474. 646  
647  
648  
649

Chen Jia and Yue Zhang. 2020. Multi-cell compositional LSTM for NER domain adaptation. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 5906–5917. 650  
651  
652  
653

Thomas N. Kipf and Max Welling. 2017. Semi-supervised classification with graph convolutional networks. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24–26, 2017, Conference Track Proceedings*. 654  
655  
656  
657  
658

Guillaume Lample, Miguel Ballesteros, Sandeep Subramanian, Kazuya Kawakami, and Chris Dyer. 2016. Neural architectures for named entity recognition. In *The Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 260–270. 659  
660  
661  
662  
663  
664

Ji Young Lee, Franck Dernoncourt, and Peter Szolovits. 2018. Transfer learning for named-entity recognition with neural networks. In *Proceedings of the International Conference on Language Resources and Evaluation*. 665  
666  
667  
668  
669

Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880. 670  
671  
672  
673  
674  
675  
676  
677

Bill Yuchen Lin and Wei Lu. 2018. Neural adaptation layers for cross-domain named entity recognition. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, pages 2012–2022. 678  
679  
680  
681

Jingjing Liu, Panupong Pasupat, Scott Cyphers, and James R. Glass. 2013a. Asgard: A portable architecture for multilingual dialogue systems. In *IEEE International Conference on Acoustics, Speech and Signal Processing*, pages 8386–8390. 682  
683  
684  
685  
686

Jingjing Liu, Panupong Pasupat, Yining Wang, Scott Cyphers, and James R. Glass. 2013b. Query understanding enhanced by hierarchical parsing structures. In *IEEE Workshop on Automatic Speech Recognition and Understanding*, pages 72–77. 687  
688  
689  
690  
691

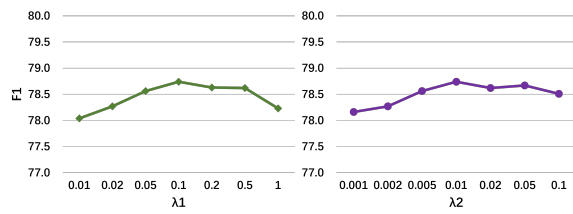
692	Zihan Liu, Genta Indra Winata, and Pascale Fung. 2020a. Zero-resource cross-domain named entity recognition. In <i>Proceedings of the Workshop on Representation Learning for NLP</i> , pages 1–6.	Jacobus H. van Lint and Richard M. Wilson. 1992. <i>A course in combinatorics</i> . Cambridge University Press.	748
693			749
694			750
695			
696	Zihan Liu, Genta Indra Winata, Peng Xu, and Pascale Fung. 2020b. Coach: A coarse-to-fine approach for cross-domain slot filling. In <i>Proceedings of the Annual Meeting of the Association for Computational Linguistics</i> , pages 19–25.	Titouan Vayer, Nicolas Courty, Romain Tavenard, Laetitia Chapel, and Rémi Flamary. 2019. Optimal transport for structured data with application on graphs. In <i>Proceedings of the 36th International Conference on Machine Learning</i> , volume 97, pages 6275–6284.	751
697			752
698			753
699			754
700			755
701	Zihan Liu, Yan Xu, Tiezheng Yu, Wenliang Dai, Ziwei Ji, Samuel Cahyawijaya, Andrea Madotto, and Pascale Fung. 2021. Crossner: Evaluating cross-domain named entity recognition. In <i>Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2-9, 2021</i> , pages 13452–13460.	Jing Wang, Mayank Kulkarni, and Daniel Preotiuc-Pietro. 2020. Multi-domain named entity recognition with genre-aware and agnostic inference. In <i>Proceedings of the Annual Meeting of the Association for Computational Linguistics</i> , pages 8476–8488.	756
702			757
703			758
704			759
705			760
706			
707			761
708			762
709			763
710			764
711	David Nadeau and Satoshi Sekine. 2007. A survey of named entity recognition and classification. <i>Linguisticae Investigationes</i> , 30(1):3–26.	Yi Yang and Arzoo Katiyar. 2020. Simple and effective few-shot named entity recognition with structured nearest neighbor learning. In <i>Proceedings of the Conference on Empirical Methods in Natural Language Processing</i> , pages 6365–6375.	765
712			766
713			767
714	Jeffrey Pennington, Richard Socher, and Christopher D. Manning. 2014. Glove: Global vectors for word representation. In <i>Proceedings of the Conference on Empirical Methods in Natural Language Processing</i> , pages 1532–1543.	Zhilin Yang, Ruslan Salakhutdinov, and William W. Cohen. 2017. Transfer learning for sequence tagging with hierarchical recurrent networks. In <i>International Conference on Learning Representations</i> .	768
715			769
716			
717			770
718			771
719	Gabriel Peyré, Marco Cuturi, and Justin Solomon. 2016. Gromov-wasserstein averaging of kernel and distance matrices. In <i>Proceedings of the 33rd International Conference on Machine Learning</i> , volume 48, pages 2664–2672.	Kaichao You, Zhi Kou, Mingsheng Long, and Jianmin Wang. 2020. Co-tuning for transfer learning. In <i>Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems</i> .	772
720			773
721			774
722			775
723			
724	Gabriel Peyré, Marco Cuturi, et al. 2019. Computational optimal transport: With applications to data science. <i>Foundations and Trends® in Machine Learning</i> , 11(5-6):355–607.	<b>A Hyperparameter Results</b>	
725			
726			
727			
728	Juan Diego Rodríguez, Adam Caldwell, and Alexander Liu. 2018. Transfer learning for entity recognition of novel classes. In <i>Proceedings of the International Conference on Computational Linguistics</i> , pages 1974–1985.		
729			
730			
731			
732			
733	Erik F. Tjong Kim Sang and Fien De Meulder. 2003. Introduction to the conll-2003 shared task: Language-independent named entity recognition. In <i>Proceedings of the Conference on Natural Language Learning</i> , pages 142–147.		
734			
735			
736			
737			
738	Khaled Shaalan. 2014. A survey of arabic named entity recognition and classification. <i>Computational Linguistics</i> , 40(2):469–510.		
739			
740			
741	Meihan Tong, Shuai Wang, Bin Xu, Yixin Cao, Minghui Liu, Lei Hou, and Juanzi Li. 2021. Learning from miscellaneous other-class words for few-shot named entity recognition. In <i>Proceedings of the Annual Meeting of the Association for Computational Linguistics and the International Joint Conference on Natural Language Processing</i> , pages 6236–6247.		
742			
743			
744			
745			
746			
747			

Figure 6: The impact of weight parameters  $\lambda_1$  and  $\lambda_2$  to the performance in "Restaurant Reviews" domain.