
Think or Not? Selective Reasoning via Reinforcement Learning for Vision-Language Models

Jiaqi Wang^{1†} Kevin Qinghong Lin^{2†} James Cheng¹ Mike Zheng Shou^{2✉}

¹The Chinese University of Hong Kong ²Show Lab, National University of Singapore

Abstract

Reinforcement Learning (RL) has proven to be an effective post-training strategy for enhancing reasoning in vision-language models (VLMs). Group Relative Policy Optimization (GRPO) is a recent prominent method that encourages models to generate complete reasoning traces before answering, leading to increased token usage and computational cost. Inspired by the human-like thinking process—where people skip reasoning for easy questions but think carefully when needed—we pioneer how to enable VLMs to first decide *when reasoning is necessary*. To realize this, we propose TON, a two-stage training strategy: (i) a supervised fine-tuning (SFT) stage with a simple yet effective “**thought dropout**” operation, where reasoning traces are randomly replaced with empty thoughts. This introduces a think-or-not format that serves as a cold start for selective reasoning; (ii) a GRPO stage that enables the model to freely explore when to think or not, while maximizing task-aware outcome rewards. Experimental results show that TON can *reduce the completion length by up to 90% compared to vanilla GRPO, without sacrificing performance or even improving it*. Further evaluations across LLM (GSM8K), VLM (CLEVR, Super-CLEVR, GeoQA), and Agentic (AITZ) tasks—covering a range of reasoning difficulties under both 3B and 7B models—consistently reveal that the *model progressively learns to bypass unnecessary reasoning steps as training advances*. These findings shed light on the path toward human-like reasoning patterns in RL approaches. Our code is available at <https://github.com/kokolerk/TON>.

1 Introduction

“To think or not to think, that is the question.”

Reinforcement learning (RL) has recently emerged as a dominant post-supervised fine-tuning (SFT) strategy in vision-language models (VLMs) [1, 2, 3, 4]. Methods like GRPO [5] have shown promising results in enhancing reasoning capabilities through KL-divergence losses based on rule-driven rewards. However, these approaches often lead to unnecessarily long and redundant reasoning processes due to their reliance on full-length generative trajectories [6, 7, 8]. To address this inefficiency, some works attempt to shorten reasoning chains with rule-based reward penalties [9, 10, 11] during the pre-training phase or introduce external control mechanisms, such as in very recent Qwen3 [12]. Nonetheless, a more natural and scalable solution is to enable the model to *decide when to think*—mirroring how humans modulate cognitive effort in response to task difficulty.

In this work, we begin by presenting empirical evidence that *thinking is not always necessary*. In AITZ [13], we observe that 51% of questions can be answered correctly even when the entire reasoning trace is omitted, resulting in significant savings in thought tokens. This finding underscores

[†]Equal contribution. ✉Corresponding authors.

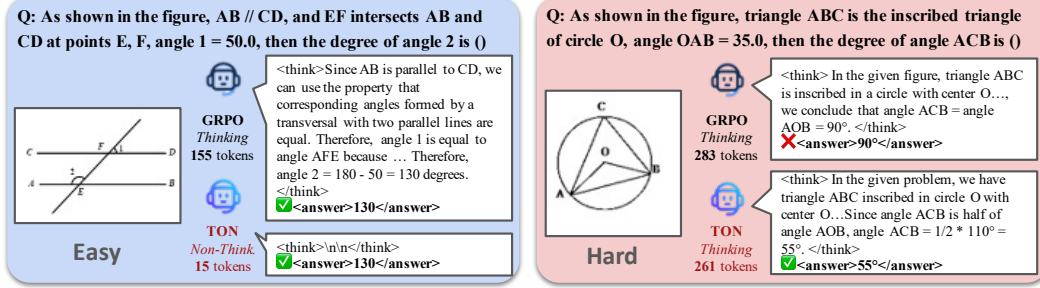


Figure 1: **Illustrating the “think or not think” trade-off.** **Left:** For simple queries, explicit reasoning is unnecessary—models like GRPO that always “think” incur redundant computation. **Right:** For more complex geometric problems, step-by-step reasoning is essential to arrive at the correct answer. Our proposed TON framework learns to adaptively invoke reasoning only when needed—skipping it for easy cases while engaging in deeper inference for harder tasks.

the potential of selective reasoning strategies to improve efficiency without sacrificing accuracy. Secondly, by exploring a simple prompting strategy — allowing the model to skip reasoning steps for easier queries — we observe that even math-enhanced VLMs struggle to adaptively omit redundant thought generation. Instead, they tend to default to a conservative approach, producing full reasoning traces regardless of task difficulty. This suggests that the ability to “think or not” is not solely determined by reasoning capacity, but should instead be treated as a distinct skill—one that should be explicitly activated through format-following in supervised fine-tuning (SFT) stage.

Motivated by the above observations, we introduce **TON** (*i.e.*, **Think-or-Not**), a two-stage training framework featuring a simple yet effective “**thought dropout**” approach. This method explicitly replace reasoning traces with minimal “`\n\n`” delimiter and employs SFT to train the model that reasoning can be skipped—thereby enabling the possibility of bypassing reasoning. A subsequent GRPO stage further refines this selective-reasoning policy via self-exploration, rewarding answers without introducing extra regularization. As illustrated in Figure 1, vanilla GRPO consistently generates reasoning sequences regardless of task difficulty. In contrast, our method, TON, adaptively allocates reasoning based on the complexity of the task. For simple tasks (left), TON can bypass unnecessary reasoning and directly provide the answer, reducing 90% token usage. For more hard problems (right), it still engages in detailed, step-by-step reasoning to arrive at the correct solution. To the best of our knowledge, TON is *the first work to study “when to think” in VLM*.

Built on top of TON, we using the Qwen-2.5-VL series and conduct extensive evaluations across the LLM benchmark (GSM8K [14]), vision-language tasks—spanning counting (CLEVR [15], SuperCLEVR [16]) as well as mathematical reasoning (GeoQA [17]), and the agent task like mobile agent navigation (AITZ [13])—which collectively cover a spectrum of reasoning levels and diverse task settings. Overall, we find that TON **achieves substantial reductions in completion length without compromising performance**—cutting 87% of tokens on CLEVR and 65% on GeoQA. Notably, on the multi-step navigation task AITZ, TON reduces the average task-level output length from 3.6K to 0.9K tokens. Moreover, we observe that **omitting reasoning traces can even improve performance**: on GeoQA, TON outperforms the vanilla GRPO baseline by up to 17% in accuracy, demonstrating a “free-lunch” effect where shorter reasoning outperforms or matches longer trajectories. Comprehensive ablation studies further reveal that **the skip-thought ratio increases progressively with reward improvements** during training, suggesting the model learns to selectively bypass unnecessary reasoning steps in an adaptive manner.

2 Related Works

Reinforcement Learning for Vision-Language Models. Most VLMs start with SFT on large collections of instruction data to acquire broad foundational knowledge [18, 19, 13, 20]. To further improve performance, recent work has adopted a post-training paradigm that leverages human feedback [21, 22, 23]. RL from human feedback (RLHF) fits a reward model on preference annotations and refines the policy via Proximal Policy Optimization (PPO) [24, 25, 22, 26]. Direct Preference Optimization (DPO) [27] streamlines this workflow by recasting policy updates as a binary classification task, aligning model outputs distributions with human preferences without a reward module.

Beyond these methods, Group Relative Policy Optimization (GRPO) [5] blends offline and online learning: it samples groups of thinking process, uses Answer verification (such as Math verifier) as reward feedback, and computes relative advantages within each group. By avoiding a value function, GRPO provide an elegant solution by promoting diverse reasoning paths and improved answer quality. Despite a series of GRPO follow-up works [28, 29, 9], all of these approaches assume that every question demands a full thinking—leading to lengthy decoding. In contrast, our work focuses on “*when to think*” instead of “*how to think*”: we introduce a selective reasoning policy that learns to skip unnecessary “think” phases, boosting inference efficiency without sacrificing accuracy.

Thinking in Language Models. From early Chain-of-Thought [30, 31, 32] prompting to recent reasoning-intensive reinforcement learning approaches [5, 23, 33, 34], reasoning has emerged as a core dimension in the development of language models. Most existing work emphasizes how to enhance reasoning capabilities, often resulting in increasingly lengthy and complex thought processes [7, 35, 10] while relatively few studies address the efficiency of reasoning. For instance, [36] proposes a long2short strategy to compress decoding length, [37] encourages models to output “I don’t know” to terminate unproductive reasoning, and [38] introduces a token-budget-aware reasoning policy. While these approaches offer promising insights into controlling reasoning length, we argue for a more foundational perspective: rather than deciding how to reason once the process has started, *models should first determine whether reasoning is necessary at all*. Simple questions may be answered directly without any explicit reasoning, while complex questions may require maintaining a full reasoning trajectory [8, 6, 9]. In this work, we explore the selective reasoning paradigm within VLMs by introducing a simple yet effective method – **thought-dropout**. We validate its effectiveness on tasks such as Counting, Math, and further extend it to more practical agentic settings.

3 Preliminary

Task Definition. We formalize the vision-language reasoning environment as a Markov Decision Process (MDP) defined by a tuple $(\mathcal{V}, \mathcal{Q}, \mathcal{S}^*, \pi, r)$, covering a wide range of vision-language tasks. Here, $\mathcal{V}$ denotes the visual context (*e.g.*, an image). $\mathcal{Q}$ is a language-based query or question posed about the visual input. The model, governed by policy π , takes the input pair $(\mathcal{V}, \mathcal{Q})$ and generates a predicted answer $\mathcal{S}$. The environment provides a scalar reward function $r(\cdot)$ based on the model’s response $\mathcal{O}$. A correct prediction, *e.g.*, $\mathcal{O}$ matches the ground truth answer $\mathcal{S}^*$, yields a positive reward, while an incorrect one yields zero. The objective in this environment is to learn an adaptive policy π_θ , parameterized by θ , that maximizes the expected reward, enabling the model to reason selectively and efficiently across diverse input settings.

Reward Function. The reward function $r(\cdot)$ can be either model-based [24, 26] or rule-based, as recently demonstrated in [5, 23], which is typically categorized into two types: format rewards r_f and outcome rewards r_o . While the outcome rewards are usually carefully designed based on different tasks or requests in previous works [5, 1, 2, 9], the format reward r_f is always shared in the same. Given the response $\mathcal{O}$, it should follow the required HTML tag format $\langle \text{think} \rangle \mathcal{T} \langle \text{think} \rangle \langle \text{answer} \rangle \mathcal{S} \langle \text{answer} \rangle$, where $\mathcal{T}$ is the reasoning process (*i.e.*, a thought) and $\mathcal{S}$ is the predicted answer. This formulation requires the model to think before deriving the answer and makes it easy to parse both the reasoning process and the final outcome (*e.g.*, via regular expression).

4 TON: Selective Reasoning via Policy Optimization

Observation. In practice, humans do not require explicit reasoning for all tasks—many can be completed intuitively. Similarly, models can often produce correct answers to simple questions without explicit thinking. As illustrated in figure 2, the percentages of correct and incorrect samples under different setups with and without the thinking process in inference (see Appendix A for overall performance). We find that 52.1% of answers remained correct without “think,” and 14.5% were even correct only without it—implying that *explicit thinking is not always necessary*.

	wo think correct	wo think incorrect
w think correct	52.1%	25.6%
w think incorrect	14.5%	7.69%

Figure 2: **Accuracy comparison of with v.s. without “thinking”** during SFT using Qwen-2.5-VL-3B on the AITZ task.

A straightforward idea is to prompt the model to decide whether to “think” or not (we prompt the model to skip thinking in the simple questions in Sec. 5.4). However, as shown in our experiments (Figure 5d and Appendix G.7), the model still tends to generate the full reasoning process without any no-think try. This suggests that the ability to decide whether to think is not solely governed by reasoning capability, but should instead be treated as a separate skill—one that must be explicitly trained through format-following during the supervised fine-tuning (SFT) stage. These observations motivate us to activate this ability early in the SFT stage and develop TON, which enables selective reasoning by automatically switching between “think” and “non-think” modes.

4.1 First SFT stage: Thought Dropout

In the initial stage, the model is typically fine-tuned on “think-answer” formatted data, where the “think” contains high-quality reasoning traces to serve as a cold start. To extend this predefined reasoning ability to selective reasoning, we view “think” vs. “non-think” as part of the output format itself by *dropping* the “think” component during training.

However, it is difficult to determine which samples should be skipped, as different models exhibit varying reasoning capabilities. Therefore, we begin with *random* dropout and allow the model to learn to decide for itself during the second RL stage (Sec.4.2). To this end, we propose “**Thought Dropout**” that randomly injecting empty “thought” segments, requiring only minor code changes:

Algorithm 1 Pseudo-code for `thought_dropout`

```
def thought_dropout(thought, dropout_prob):
    if random.random() < dropout_prob:
        thought = "\n\n"
    return thought
```

This approach injects both the answer format and the skip-thought format as prior knowledge before the second RL stage.

Where do Thoughts come from? Given a policy operating in an environment $(\mathcal{V}, \mathcal{Q}, \mathcal{S}^*, \pi, r)$, a key challenge is how to curate high-quality cold-start “thought” data without relying on external models, such as closed-source APIs. A naïve approach is to run multiple inference passes and retain only successful cases based on answer matching—but we find this to be less effective. To address the scarcity of high-quality “thought” data, we instead adopt a **reverse thinking** strategy: leveraging the base model π itself to self-generate a rich corpus of thought sequences. Specifically, given the visual context $\mathcal{V}$, textual query $\mathcal{Q}$, and ground-truth answer $\mathcal{S}^*$, we prompt the policy π_θ to deduce the corresponding intermediate thought as follows:

$$\mathcal{T} \leftarrow \pi_\theta(\mathcal{V}, \mathcal{Q}, \mathcal{S}^*) \quad (1)$$

Specially, we generate intermediate thoughts with the following prompts:

Prompt for Reverse Thinking

Based on the following question and image, generate a thought process to explain how to derive the answer from the inputs.
Image: {Image} Question: {Question} Answer: {Answer}
Do not output the answer, only generate the reasoning process. Formulate your outputs using concise language.

In this way, we curate sufficient thought data without relying on external models. These serve as our cold-start training corpus, enabling us to apply the Thought Dropout strategy during SFT to activate the model’s ability to bypass thoughts.

4.2 Second RL stage: Group Relative Policy Optimization

Although SFT teaches the skip-thought format, it still leaves a central question unresolved: when should thoughts be skipped or retained? Ideally, the model should learn to explore this decision on

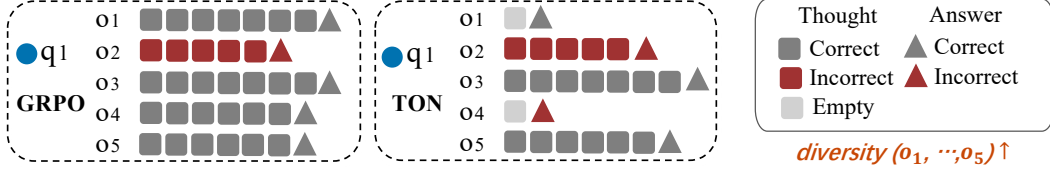


Figure 3: **Illustration of the responses from GRPO and TON.** q_1 is the question and $\{o_1, \dots, o_5\}$ are the generated responses containing thoughts $\mathcal{T}$ (circle) and answers $\mathcal{S}$ (triangle). TON can sample from the empty think $\mathcal{T}_{\setminus n \setminus n}$, thus enhancing the response diversity over the vanilla GRPO.

its own. To this end, we adopt reinforcement learning via GRPO to enhance the model’s ability to explore this decision as part of its reasoning process.

Given an image $v \in \mathcal{V}$ and text query $q \in \mathcal{Q}$, GRPO samples N candidate responses with variations $\{o_1, o_2, \dots, o_N\}$ from the policy π_θ and evaluates each response o_i using a reward function $r(\cdot)$, which measures the quality of the candidate in the context of the given question. To determine the relative quality of these responses, GRPO normalizes the rewards by computing their mean and standard deviation and subsequently derives the advantage as:

$$A_i = \frac{r(o_i) - \text{mean}\{r(o_1), r(o_2), \dots, r(o_N)\}}{\text{std}\{r(o_1), r(o_2), \dots, r(o_N)\}} \quad (2)$$

where A_i represents the advantage of the candidate response o_i relative to other sampled responses. GRPO encourages the model to generate responses with higher advantages within the group by updating the policy π_θ using the following objective:

$$\mathcal{J}_{GRPO}(\theta) = \mathbb{E}[\{o_i\}_{i=1}^N \sim \pi_{\theta_{old}}(v, q)] \frac{1}{N} \sum_{i=1}^N \{\min[\alpha_i \cdot A_i, \beta_i \cdot A_i] - \beta \mathbb{D}_{KL}[\pi_\theta || \pi_{ref}]\} \quad (3)$$

$$\alpha_i = \frac{\pi_\theta(o_i|v, q)}{\pi_{\theta_{old}}(o_i|v, q)}, \quad \beta_i = \text{clip}\left(\frac{\pi_\theta(o_i|v, q)}{\pi_{\theta_{old}}(o_i|v, q)}, 1 + \epsilon, 1 - \epsilon\right). \quad (4)$$

How does TON impact GRPO? As illustrated in Fig. 3, our TON allows the model to choose “empty-think” $\mathcal{T}_{\setminus n \setminus n}$ during the inference step, thus resulting in a significant variation in the distribution between the non-think ($o_i \sim \mathcal{T}_{\setminus n \setminus n}$) and think responses ($o_i \sim \mathcal{T}$) by TON compared to both think ones ($o_i \sim \mathcal{T}$) generated by vanilla GRPO. Unlike previous works like DAPO [28] emphasize on advantage distribution A_i by dynamic sampling in the sparse reward space, our TON shifts the focus to the latent distribution space of responses ($\pi_\theta(o_i|v, q)$), thus enhancing the diversity of the terms α and β in Eq. 4.

How to design Rewards? To support GRPO training across diverse settings, it is crucial to carefully examine reward design choices. We consider two main types of matching:

(i) *Discrete Matching.* For tasks with deterministic, categorical or numerical outputs—e.g., classification, counting, or math problems—we use a binary value reward $r_d(s, g) = \mathbf{1}(s = g)$: if the predicted answer s matches the ground-truth g , we assign $r_d = 1$; otherwise, $r_d = 0$.

(ii) *Continuous Matching.* For tasks producing continuous outputs—e.g., spatial coordinates in UI navigation or object grounding—we allow a tolerance region. Given a predicted point $\mathbf{p} = [x, y]$ and a ground-truth box $\mathbf{b} = [x_1, y_1, x_2, y_2]$, we define:

$$r_c(\mathbf{p}, \mathbf{b}) = \begin{cases} 1, & \mathbf{p} \text{ lies inside } \mathbf{b}, \\ 0, & \text{otherwise.} \end{cases}$$

If only a ground-truth point $\mathbf{p}^*$ is available, we use a distance threshold θ :

$$r_c(\mathbf{p}, \mathbf{p}^*) = \begin{cases} 1, & \|\mathbf{p} - \mathbf{p}^*\|_2 \leq \theta, \\ 0, & \text{otherwise.} \end{cases}$$

In practice, we sum the applicable components to form an outcome reward: $r_o = r_d + r_c$. This simple yet flexible scheme can cover classification, numeric reasoning, and grounding. See Appendix B for details on adapting these rewards alongside the format reward to individual downstream tasks.

Table 2: **Performance comparison between TON and vanilla GRPO.** Acc. is the accuracy on the test set. Time is the RL training time. Length is the average competition length at the end of training.

	Counting (CLEVR)			Math (GeoQA)					
	Acc (↑)	Time (↓)	Len. (↓)	Acc (↑)	Time (↓)	Len. (↓)	Acc (↑)	Time (↓)	Len. (↓)
	Qwen-2.5-VL-3B			Qwen-2.5-VL-3B			Qwen-2.5-VL-7B		
Baseline	64.0	-	306	36	-	924	38	-	939
w. GRPO	93.5	1h 44m	227	37	2h 50m	272	44	3h 4m	1069
w. TON	98.5	57m	28	51	2h 4m	96	61	2h 34m	112
Gain	+5.0	-47m	-87%	+14	-46m	-65%	+17	-29m	-90%

5 Experiments

In this section, we conduct experiments on various benchmarks to evaluate our approach. Mainly, we design the experiments to study the following key questions:

Q1: Compared to vanilla GRPO, how does TON impact performance and efficiency?

Q2: Is there a correlation between TON’s skipping behavior and the strength of reasoning ability (*e.g.*, different model sizes or a single model under different iterations)?

Q3: Do we really need SFT with thought dropout? Can we rely solely on prompt following if the base model is strong enough?

5.1 Benchmarks and Settings

To evaluate the effectiveness and generalization ability of our approach on the below settings:

Benchmarks. We evaluate TON on three vision-language benchmarks, including the general benchmark CLEVR [15] (3D object counting), agent benchmark AITZ [13] (mobile navigation), and the math benchmark GeoQA [17] (middle school math questions) as illustrated in Table 1, spanning a spectrum of reasoning levels from simple to complex. To benchmark the model’s Out-of-Distribution (OOD) performance, we also evaluate on Super-CLEVR [16] to supplement the CLEVR. AITZ comprises four test domains: we train on the {General} and test on the remaining OOD domains: {Web shopping, Google apps, Install}. We remove the choices in GeoQA and ask the model to generate the answer, enhancing the reasoning complexity. AITZ includes action thought annotations, which we utilize directly, while applying our reverse thinking to generate thoughts for SFT on CLEVR and GeoQA. More benchmark details refer to Appendix E.

Table 1: **Summary of benchmark used in our evaluation.**

Benchmark	Model	OOD	Type	Difficulty	Answer	Thought len.
GSM8K [14]	LLM		Math	Hard	Number	939
CLEVR [15]	VLM		Counting	Easy	Integrate	586
Super-CLEVR [16]	VLM	✓	Counting	Easy	Integrate	-
GeoQA [17]	VLM		Math	Hard	Number	1652
AITZ [13]	Agent		GUI	Medium	Action (x)	283
AITZ (OOD)	Agent	✓	GUI	Medium	Action (x)	283

Training details. We conduct our experiments using Qwen-2.5-VL-Instruct-3B/7B [39] as the base model. All experiments are conducted utilizing 8 NVIDIA H20 GPUs. We train 100 steps for both CLEVR and AITZ, and 300 epochs for GeoQA, given its higher reasoning difficulty level. See setup details in Appendix F. We leverage vLLM [40] to accelerate GRPO training. We add the SFT stage before GRPO as the baseline on the agent task with the same setting as TON because we observe that directly applying GRPO would cause the 0 coordinate reward during the training process, considering its complex output format. For simplicity, we set the dropout probabilities to 50% and examine the impact of different dropout ratios selected from {20%, 50%, 80%} in Sec 5.3.

For evaluation, we test all the datasets under the greedy strategy. In CLEVR and GeoQA tasks, where answers are numerical, we measure accuracy by comparing the predicted number to the ground truth. In the AITZ task, where answers are structured as JSON-formatted actions, we report step-level and task-level metrics, including type accuracy (correct action type) and exact accuracy (correct action type and click coordinates) following [18].

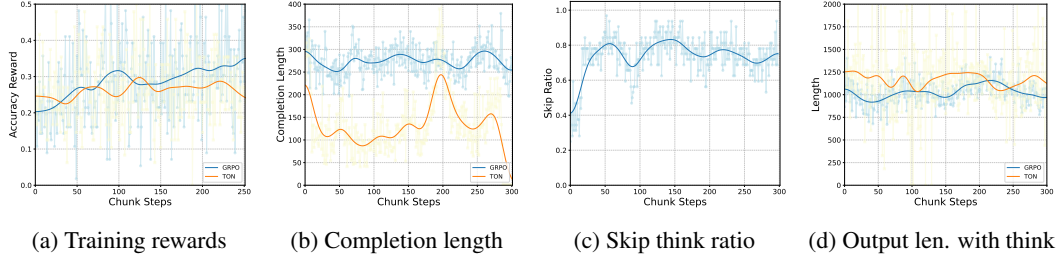


Figure 4: **Training metrics comparison between TON and GRPO on GeoQA.** (a) Training rewards, (b) Completion length over training steps, (c) Ratio of non-think outputs to total samples at each step for TON, and (d) Average completion length of think outputs across training.

Table 3: **Out-of-domain (OOD) performance comparison** between our method TON and GRPO on the the AITZ – multi-step mobile navigation. ‘Type’ is the action type accuracy and ‘Exact’ requires both the type and value to be correct exactly. ‘Avg.’ is the average accuracy of all domains. ‘Task-level thought’s’ is the average output lengths on all OOD domains. Step-level accuracy is reported.

	Think?	IID		OOD						Avg		Task-level
		General		Google apps		Web		Install		type	exact	Thought’s len.
		type	exact	type	exact	type	exact	type	exact			
Qwen-2.5-VL-3B	✓	0.01	0	0.01	0	0.01	0	0.01	0	0.01	0	2132
w. SFT	✗	0.39	0.11	0.44	0.12	0.54	0.19	0.47	0.17	0.46	0.15	742
w. SFT	✓	0.67	0.12	0.53	0.17	0.56	0.13	0.58	0.14	0.58	0.14	3572
w. GRPO	✓	0.74	0.6	0.72	0.57	0.7	0.5	0.81	0.65	0.74	0.59	3664
w. TON	Ours	0.74	0.6	0.74	0.56	0.72	0.5	0.78	0.64	0.75	0.59	922
Gain		+0.0	+0.0	+0.02	-0.01	+0.02	+0.0	-0.03	-0.01	+0.01	+0.0	-2742
Qwen-2.5-VL-7B		0.28	0.14	0.26	0.1	0.33	0.13	0.39	0.16	0.31	0.13	3304
w. GRPO	✓	0.64	0.22	0.73	0.32	0.6	0.15	0.62	0.23	0.65	0.23	3272
w. TON	Ours	0.74	0.54	0.62	0.23	0.68	0.47	0.73	0.55	0.69	0.45	908
Gain		+0.1	+0.32	-0.11	-0.09	+0.08	+0.32	+0.09	+0.32	+0.04	+0.22	-2364

5.2 Q1: Performance and Efficiency Comparison between TON and GRPO

In Table 2, we present TON on the CLEVR and GeoQA benchmarks under both 3B and 7B settings, with the performance, time consumption, and the average completion length at the RL stage. We find that TON effectively reduces the average of the completion length by up to 90% while achieving comparable even superior performance compared to GRPO with a maximum of 17 Acc. gains. This imply that **skipping unnecessary reasoning can lead to better performance**. The reduction of the completion length decreases the decoding time when generating samples, thus simultaneously shortening the training time. Figure 4a & 4b show the reward and completion length curves where TON remains the rewards on par with vanilla GRPO while the completion length reduces significantly. Appendix G.2 & G.1 shows the entire metrics during training.

Multi-step Navigation and OOD Testing. In Table 3, we evaluate TON’s performance on AITZ – multi-step mobile navigation, we also assessed its generalization capabilities on OOD test sets using a greedy decoding strategy. Table 3 summarizes the step-level type match accuracy and exact match accuracy for both IID (general) and OOD (Google Apps, web shopping, and install) domains on AITZ, with detailed training visualization in Appendix G.3. Overall, TON demonstrates comparable OOD generalization performance to GRPO, while significantly reducing the task-level output length from 3K to 0.9K (70% token saving). This highlights the strong potential of **TON to substantially reduce completion length without compromising performance**. See Appendix G.4 for the OOD performance on other benchmarks.

Adapt TON framework to the text-only setting. Furthermore, we extend our study to the LLM domain and present the corresponding experiments and results in Figure 6(b) on the LLM benchmark GSM8K. The findings indicate that TON significantly reduces response length while maintaining high accuracy, demonstrating the generalizability of TON across different modalities.

5.3 Q2: Skip Thought Ratio Analysis

Beyond the performance change and completion length reduction achieved by TON, we further investigated the evolution of the skip ratio in ‘Thought dropout’ during the training step. Figure 4c

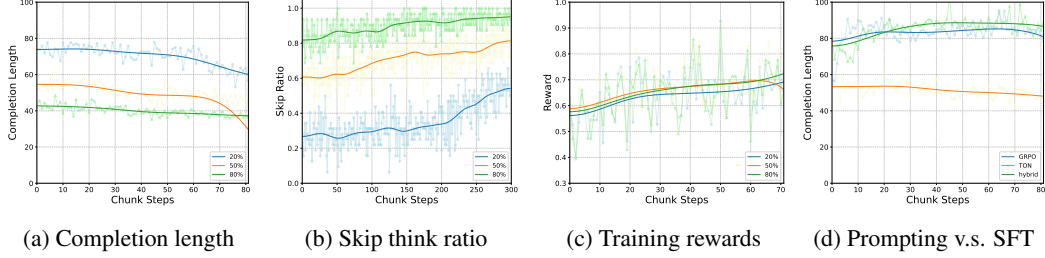


Figure 5: **Further Analysis of TON on the AITZ benchmark.** (a)(b)(c) is the average completion length, skip thought ratios, and the reward under different dropout probabilities. (d) Prompting (hybrid) does not reduce the completion length, while TON using SFT can effectively reduce it.

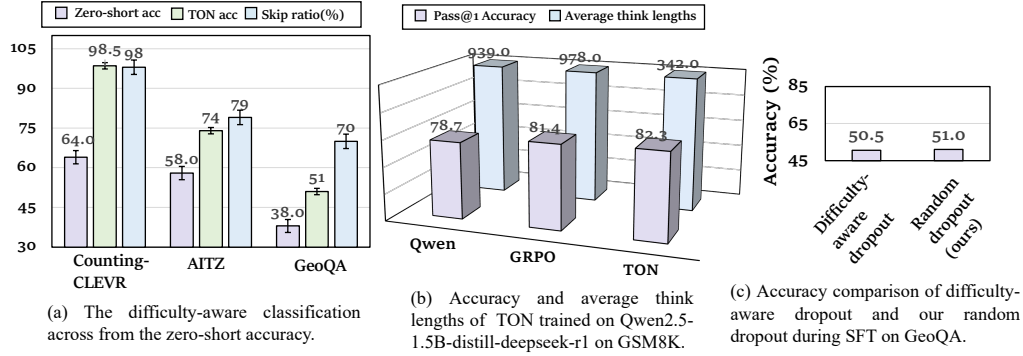


Figure 6: **Further Analysis of TON.** (a)(c) give the in-depth analysis of the effectiveness of our thought dropout and the generalization across the task difficulty. (b) shows the superiority of TON on the text-only domains.

illustrates the percentage of skip ratio in the generated samples at each step on GeoQA. We observed an increasing trend in the skip ratio during the training process with the increase in training reward. A similar trend is observed across three benchmarks in Figure 21 in the Appendix G.6. This phenomenon suggests that **the model progressively internalizes the reasoning process—learning to skip explicit thoughts while still producing accurate answers**. Moreover, Figure 4d illustrates the length of these outputs generated with ‘think’. TON maintain comparable lengths to the vanilla GRPO, indicating that the TON model can **choose not to think but remains diligent when deeper reasoning is necessary**.

Thought dropout ratio ablation. We experiment with the impact of different thought dropout ratios of 20%, 50%, and 80% during the SFT stage. Figure 5a & 5b show the completion lengths and the skip ratio during the training process on AITZ. Figure 5c shows a close reward curve of these three variants. Refer more metrics on Appendix G.5. Although the dropout ratios differ, TON consistently exhibits an increasing skip ratio as training progresses. Notably, the 20% setting shows a rapid increase in skip rate, while the higher 80% setting remains relatively stable throughout training. This motivates us to start with a lower dropout probability for further investigation. TON can then be dynamically optimized according to reward signals—decreasing the dropout ratio when performance is high and increasing it when performance drops.

Deep analysis of the difficulty-aware dropout and random dropout (ours). As shown in Figure 6(a), we further assess the task difficulty both qualitatively (via intuitive reasoning complexity) and quantitatively (by base VLM zero-shot accuracy), grouped as: 60-100 (easy), 40-60 (medium), and 0-40 (hard). Our findings indicate that our TON maintains a high skip ratio for easy counting queries, allowing it to bypass unnecessary thinking processes, while keeping a low skip ratio for harder, more professional, knowledge-intensive questions to fully utilize its thinking capabilities. Furthermore, we do the difficulty-aware ablation as shown in Figure 6(c), where we drop thoughts for only the easy samples (those answered correctly by the base VLM). To investigate this, we then implement a difficulty-aware dropout strategy and compare its accuracy under our TON training framework where random dropout slightly outperforms difficulty-aware dropout (51.0% vs. 50.5% in

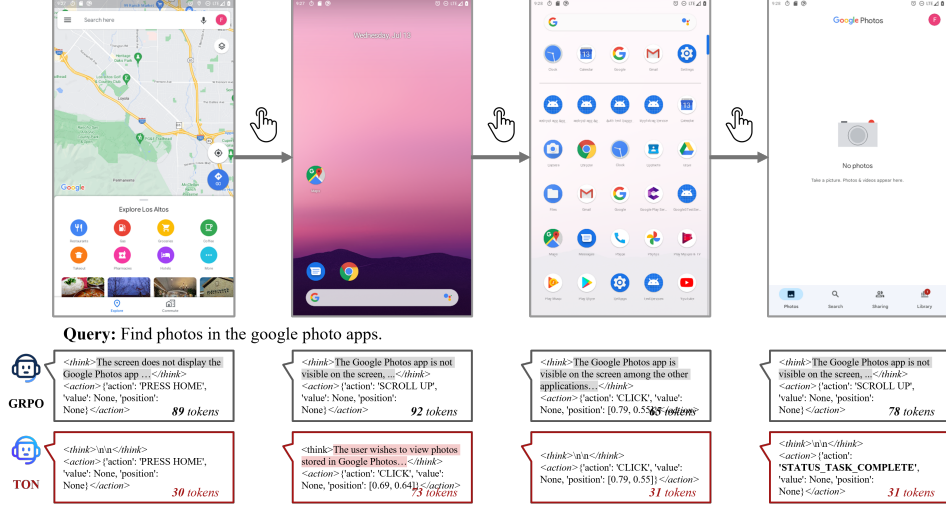


Figure 7: **Comparison between GRPO and TON on Agent setting AITZ [13].** TON adaptively skips unnecessary think steps during multi-step mobile navigation, achieving greater decoding efficiency compared to GRPO while maintaining task accuracy (saving 60% tokens in this case).

TON Accuracy). The results suggest that hand-crafted heuristics for task difficulty may introduce noise or unintended bias, potentially interfering with the learning process while our random dropout offers a simpler, unbiased alternative that generalizes well across tasks.

5.4 Q3: Empirical Verification of SFT Significance in TON

In addition to incorporating the skip-think format during the SFT stage as in TON, we explored a simpler alternative: modifying the prompt to encourage the model to automatically omit reasoning steps, enabling direct GRPO training without the need for a separate SFT stage. The hybrid-thought prompt is defined as follows:

Prompt for Hybrid Thinking



A conversation between User and Assistant. The user asks a question, and the Assistant solves it. The assistant evaluates whether the question is simple enough to answer directly. If simple, the output is formatted as <think>\n\n<think><answer>answer here</answer>. If the question is difficult, the assistant needs to first think then answering the question. The output is formatted as <think> reasoning process here </think><answer> answer here </answer>. The assistant is encouraged to use <think>\n\n<think> while maintaining accuracy.

Figure 5d shows the completion length of GRPO using the hybrid prompt, vanilla GRPO (with a full-think prompt), and TON throughout the training process on AITZ. Appendix G.7 presents similar trends across three benchmarks, revealing only minor differences in completion length between the hybrid prompt and vanilla GRPO. Moreover, we observe only 2 ‘skip’ cases in GeoQA and none in AITZ among all samples generated by GRPO during both training and inference. We attribute this to the model’s tendency to play it safe by generating long and detailed reasoning, consistent with its ingrained behavioral patterns learned during pre-training or SFT. Since the model does not produce skip-thought outputs, applying additional reward to these outputs has no effect, resulting in a zero contribution throughout training. These findings highlight the necessity of our SFT stage with thought dropout (Sec. 4.1) to establish the desired format-following behavior.

5.5 Qualitative Examples

Figure 7 compares GRPO and TON on the AITZ benchmark for multi-step mobile navigation. While GRPO generates verbose reasoning at every step, TON adaptively skips unnecessary thinking, reducing token usage by 60% without sacrificing task accuracy. This demonstrates TON’s efficiency in handling real-world, long-horizon procedural agent tasks. Table 4 further illustrates TON’s ability

Table 4: **Illustration between Thinking and Non-Thinking modes from CLEVR [15]**. TON demonstrates selective activation of reasoning—engaging thought only when needed—whereas GRPO generates reasoning traces for both cases indiscriminately. The full outputs are in Table 11.

Counting examples from CLEVR [15]		
		
Question (GT)	How many items are there in the image? <code><answer>3</answer></code>	How many items are there in the image? <code><answer>8</answer></code>
GRPO's outputs	<code><think> The image shows three objects ... 1. Green Cylinder: Transparent (metallic) 2. Teal Sphere: Transparent (metallic) </think> <answer>3</answer></code>	<code><think> - I count six distinct objects in the picture: a large green matte cylinder, a blue matte cylinder, ... - I also note the size and color variety of each object as described by the visual cues. </think> <answer>10</answer></code>
TON's outputs	<code><think>\n\n</think> <answer>3</answer></code>	<code><think> Okay, let's check this out. The user provided a image with First, I need to count ... 1. "A small purple rubber sphere..." 3. "A small gray rubber cube..." Third. ... Wait, that's eight distinct entries... </think> <answer> 8 </answer></code>

to selectively activate reasoning. Unlike GRPO, which consistently generates detailed thought traces, TON omits reasoning for simple questions that can be answered at a glance, while producing accurate and focused reasoning for complex scenarios involving visual occlusion.

6 Conclusion

We present TON, a simple yet effective two-stage training framework that enables vision-language models to learn *when to reason*—introducing selective reasoning as a controllable and trainable behavior. By combining thought dropout during supervised fine-tuning with reward-guided refinement via GRPO, TON significantly reduces completion length (up to **90%**) without sacrificing—and in some cases improving—performance across diverse reasoning tasks. Our findings challenge the assumption that full reasoning traces are always beneficial and pave the way for more efficient, human-like reasoning strategies in both multimodal intelligence and reinforcement learning.

7 Acknowledgements

This research is supported by the National Research Foundation, Singapore under its AI Singapore Programme (AISG Award No: AISG3-RP-2022-030).

We sincerely thank Dongchi Huang for his invaluable guidance on the code and for providing essential computational resources. We also appreciate Binghui Xie's insightful discussion on topic selection and idea suggestions. Additionally, we are grateful to Qiguang Chen and Yuxuan Wan for their thoughtful and constructive feedback on this paper. Finally, we extend our gratitude to Xiaojun Guo and Qixun Wang for their valuable advice on visual reasoning and the GRPO series methods.

References

- [1] Zilin Huang, Zihao Sheng, Yansong Qu, Junwei You, and Sikai Chen. Vlm-rl: A unified vision language models and reinforcement learning framework for safe autonomous driving. *arXiv*

- preprint arXiv:2412.15544*, 2024.
- [2] Zhengxi Lu, Yuxiang Chai, Yaxuan Guo, Xi Yin, Liang Liu, Hao Wang, Han Xiao, Shuai Ren, Guanqing Xiong, and Hongsheng Li. Ui-r1: Enhancing action prediction of gui agents by reinforcement learning, 2025.
 - [3] Run Luo, Lu Wang, Wanwei He, and Xiaobo Xia. Gui-r1 : A generalist r1-style vision-language action model for gui agents, 2025.
 - [4] Hardy Chen, Haoqin Tu, Fali Wang, Hui Liu, Xianfeng Tang, Xinya Du, Yuyin Zhou, and Cihang Xie. Sft or rl? an early investigation into training r1-like reasoning large vision-language models, 2025.
 - [5] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Y Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
 - [6] Jinyan Su, Jennifer Healey, Preslav Nakov, and Claire Cardie. Between underthinking and overthinking: An empirical study of reasoning length and correctness in llms, 2025.
 - [7] Qiguang Chen, Libo Qin, Jiaqi Wang, Jinxuan Zhou, and Wanxiang Che. Unlocking the capabilities of thought: A reasoning boundary framework to quantify and optimize chain-of-thought, 2024.
 - [8] Yuyang Wu, Yifei Wang, Tianqi Du, Stefanie Jegelka, and Yisen Wang. When more is less: Understanding chain-of-thought length in llms, 2025.
 - [9] Xingyu Chen, Jiahao Xu, Tian Liang, Zhiwei He, Jianhui Pang, Dian Yu, Linfeng Song, Qiuzhi Liu, Mengfei Zhou, Zhuosheng Zhang, Rui Wang, Zhaopeng Tu, Haitao Mi, and Dong Yu. Do not think that much for $2+3=?$ on the overthinking of o1-like llms, 2024.
 - [10] Haotian Luo, Haiying He, Yibo Wang, Jinluan Yang, Rui Liu, Naiqiang Tan, Xiaochun Cao, Dacheng Tao, and Li Shen. Adar1: From long-cot to hybrid-cot via bi-level adaptive reasoning optimization, 2025.
 - [11] Yi Shen, Jian Zhang, Jieyun Huang, Shuming Shi, Wenjing Zhang, Jiangze Yan, Ning Wang, Kai Wang, and Shiguo Lian. Dast: Difficulty-adaptive slow-thinking for large reasoning models, 2025.
 - [12] An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yu Wan, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zihan Qiu. Qwen2.5 technical report. *arXiv preprint arXiv:2412.15115*, 2024.
 - [13] Jiwen Zhang, Jihao Wu, Yihua Teng, Minghui Liao, Nuo Xu, Xiao Xiao, Zhongyu Wei, and Duyu Tang. Android in the zoo: Chain-of-action-thought for gui agents. *arXiv preprint arXiv:2403.02713*, 2024.
 - [14] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems, 2021.
 - [15] Justin Johnson, Bharath Hariharan, Laurens Van Der Maaten, Li Fei-Fei, C Lawrence Zitnick, and Ross Girshick. Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2901–2910, 2017.
 - [16] Zhuowan Li, Xingrui Wang, Elias Stengel-Eskin, Adam Kortylewski, Wufei Ma, Benjamin Van Durme, and Alan L Yuille. Super-clevr: A virtual benchmark to diagnose domain robustness in visual reasoning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 14963–14973, 2023.

- [17] Jiaqi Chen, Jianheng Tang, Jinghui Qin, Xiaodan Liang, Lingbo Liu, Eric P Xing, and Liang Lin. Geoqa: A geometric question answering benchmark towards multimodal numerical reasoning. *arXiv preprint arXiv:2105.14517*, 2021.
- [18] Kevin Qinghong Lin, Linjie Li, Difei Gao, Zhengyuan Yang, Shiwei Wu, Zechen Bai, Weixian Lei, Lijuan Wang, and Mike Zheng Shou. Showui: One vision-language-action model for gui visual agent. *arXiv preprint arXiv:2411.17465*, 2024.
- [19] Kanzhi Cheng, Qiushi Sun, Yougang Chu, Fangzhi Xu, Yantao Li, Jianbing Zhang, and Zhiyong Wu. Seeclck: Harnessing gui grounding for advanced visual gui agents. *arXiv preprint arXiv:2401.10935*, 2024.
- [20] Wenyi Hong, Weihang Wang, Qingsong Lv, Jiazheng Xu, Wenmeng Yu, Junhui Ji, Yan Wang, Zihan Wang, Yuxiao Dong, Ming Ding, et al. Cogagent: A visual language model for gui agents. *arXiv preprint arXiv:2312.08914*, 2023.
- [21] OpenAI. Gpt-4 technical report, 2023.
- [22] Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- [23] DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiaoshi Li, Jiawei Wang, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Meng Li, Miaojun Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shuting Pan, S. S. Li, Shuang Zhou, Shaoqing Wu, Shengfeng Ye, Tao Yun, Tian Pei, Tianyu Sun, T. Wang, Wangding Zeng, Wanbiao Zhao, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, W. L. Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyue Jin, Xiaojin Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yudian Wang, Yue Gong, Yuheng Zou, Yujia He, Yunfan Xiong, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanhong Xu, Yanping Huang, Yaohui Li, Yi Zheng, Yuchen Zhu, Yunxian Ma, Ying Tang, Yukun Zha, Yuting Yan, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning, 2025.
- [24] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [25] OpenAI. Gpt-4v, 2023.
- [26] Leandro von Werra, Younes Belkada, Lewis Tunstall, Edward Beeching, Tristan Thrush, Nathan Lambert, Shengyi Huang, Kashif Rasul, and Quentin Gallouédec. Trl: Transformer reinforcement learning. <https://github.com/huggingface/trl>, 2020.

- [27] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36, 2024.
- [28] Qiying Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, et al. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025.
- [29] Zichen Liu, Changyu Chen, Wenjun Li, Penghui Qi, Tianyu Pang, Chao Du, Wee Sun Lee, and Min Lin. Understanding rl-zero-like training: A critical perspective. *arXiv preprint arXiv:2503.20783*, 2025.
- [30] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837, 2022.
- [31] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations (ICLR)*, 2023.
- [32] Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Ehsan Azarnasab, Faisal Ahmed, Zicheng Liu, Ce Liu, Michael Zeng, and Lijuan Wang. Mm-react: Prompting chatgpt for multimodal reasoning and action. *arXiv preprint arXiv:2303.11381*, 2023.
- [33] Hao Bai, Yifei Zhou, Mert Cemri, Jiayi Pan, Alane Suhr, Sergey Levine, and Aviral Kumar. Digirl: Training in-the-wild device-control agents with autonomous reinforcement learning. *arXiv preprint arXiv:2406.11896*, 2024.
- [34] Zehan Qi, Xiao Liu, Iat Long Iong, Hanyu Lai, Xueqiao Sun, Wenyi Zhao, Yu Yang, Xinyue Yang, Jiadai Sun, Shuntian Yao, et al. Webrl: Training llm web agents via self-evolving online curriculum reinforcement learning. *arXiv preprint arXiv:2411.02337*, 2024.
- [35] Izzeddin Gur, Hiroki Furuta, Austin Huang, Mustafa Safdari, Yutaka Matsuo, Douglas Eck, and Aleksandra Faust. A real-world webagent with planning, long context understanding, and program synthesis. *arXiv preprint arXiv:2307.12856*, 2023.
- [36] Kimi Team, Angang Du, Bofei Gao, Bowei Xing, Changjiu Jiang, Cheng Chen, Cheng Li, Chenjun Xiao, Chenzhuang Du, Chonghua Liao, et al. Kimi k1. 5: Scaling reinforcement learning with llms. *arXiv preprint arXiv:2501.12599*, 2025.
- [37] Zirui Zhao, Hanze Dong, Amrita Saha, Caiming Xiong, and Doyen Sahoo. Automatic curriculum expert iteration for reliable llm reasoning. *arXiv preprint arXiv:2410.07627*, 2024.
- [38] Tingxu Han, Zhenting Wang, Chunrong Fang, Shiyu Zhao, Shiqing Ma, and Zhenyu Chen. Token-budget-aware llm reasoning, 2025.
- [39] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, et al. Qwen2. 5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025.
- [40] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*, 2023.
- [41] Christopher Rawles, Alice Li, Daniel Rodriguez, Oriana Riva, and Timothy Lillicrap. Android in the wild: A large-scale dataset for android device control. *arXiv preprint arXiv:2307.10088*, 2023.
- [42] Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, Zhangchi Feng, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. *arXiv preprint arXiv:2403.13372*, 2024.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [\[Yes\]](#)

Justification: The main claims made in the abstract and introduction accurately reflect the paper's contributions and scope.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: Refer to Section C.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [\[NA\]](#)

Justification: We do not have the theoretical result.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [\[Yes\]](#)

Justification: Refer to Section 5 for implementation. We will release the code and models when this paper is published.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [NA]

Justification: We will publish our code when the paper is published.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyper-parameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: Refer to Section 5.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: We fixed the random seed and selected the best performance.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.

- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: Refer to Section 5.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines?>

Answer: [Yes]

Justification: The research conform with the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: We discuss the broader impacts.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to

generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.

- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [Yes]

Justification: This paper describes safeguards that have been put in place for the responsible release of data or models that have a high risk.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We cite all papers that produced the code package or dataset.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [Yes]

Justification: The new assets introduced in the paper are well documented and the documentation is provided.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [Yes]

Justification: The paper describes the usage of LLMs.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.

Appendix

Contents

A	Motivation Experiments	22
B	Rewards for Downstream Tasks	22
C	Limitations	22
D	Broader Impact	22
E	Dataset	22
F	Setup	23
G	Experiments	24
G.1	TON on Math–GeoQA	24
G.2	TON on Counting–CLEVR	25
G.3	TON on Mobile Agent–AITZ	25
G.4	OOD Performance of TON on CLEVR	26
G.5	Different Thought Dropout Probabilities	27
G.6	Skip-thought Ratio on Different benchmarks	27
G.7	Prompt v.s. SFT on different benchmarks	28
G.8	Visualization Examples	29
G.9	Prompt for AITZ task	31
H	Supplementary	32
H.1	Comprehensive Comparison of Length, Rewards, and Skip Ratio Across Three Benchmarks	32
H.2	Reward for length rather than SFT	32
H.3	More cases	33

A Motivation Experiments

Table 5 presents the performance of the agent VQA with and without the think source during the SFT stage, as well as with and without the think format in the GRPO reward function. Using the think source results in higher performance but longer output lengths, while excluding it leads to lower performance with shorter outputs.

Table 5: Qwen2.5-VL-3B on the agent dataset (Android-in-the-zoo) with/ without think before the answer by SFT and vanilla GRPO. acc is the test accuracy and len is the output length of step-level.

	SFT		GRPO	
	acc	len	acc	len
w think	0.67	181	0.74	88
wo think	0.39	29	0.58	29

B Rewards for Downstream Tasks

General VQA: $r = r_f + r_d$, where r_f is the format reward and $r_f = 1$ if the response follows the think answer format, otherwise 0, r_d is the concrete reward that $r_d = 1$ if the predicted answer is equal to the ground truth number.

Agent VQA: $r = r_f + r_d + r_c$, where r_f is the format reward and $r_f = 1$ if the response follows the think answer format, otherwise 0, r_d is the concrete reward that $r_d = 1$ if the predicted action type is equal to the ground truth action type, *e.g.*, `click`, `press_home`, r_c is the continues reward for the predicted coordinates when the action type is click. In this paper, we use the normalized coordinates ranging from 0-1 and set $\theta = 0.14$ following [19].

Math VQA: $r = r_f + r_d$, where r_f is the format reward and $r_f = 1$ if the response follows the think answer format, otherwise 0, r_d is the concrete reward that $r_d = 1$ if the predicted answer is equal to the ground truth number.

C Limitations

Due to computational resources, our current work focuses on smaller-sized visual-language models like 3B and 7B, the proposed method has not been evaluated on even larger models (*e.g.*, 235B). We implement TON on the open-domain VLMs; however, without access to the source code of proprietary VLMs like GPT-4o, the proposed method has not been implemented on them.

D Broader Impact

In this paper, we propose a simple yet effective method TON, to cooperate SFT and RL stages by thought dropout. We improve the vanilla GRPO’s performance by sampling minor code changes to teach the model to reason during the RL exploration stage selectively. This enables a deeper understanding of RL in VLMs, inspiring flexible injection of prior knowledge into the SFT stage instead of manually creating rule-based rewards. For social impact, this work has a certain impact on the RL research in the VLM and LLM.

E Dataset

General VQA. The CLEVR dataset [15] is designed to generate complex multi-step questions based on synthetic images, assessing a model’s true reasoning ability. It is a diagnostic dataset that includes 100,000 rendered images and approximately one million automatically generated questions, of which 853,000 are unique. The dataset features challenging questions involving counting, comparison, logical reasoning, and memory storage, while the images depict simple 3D shapes. In contrast to the original CLEVR dataset, Super-CLEVR [16] introduces more complex visual components and

offers better control over the factors contributing to domain shift. For our experiments, we select a subset of 1,000 datasets that contain only counting problems for training. We evaluate the model’s performance on test sets by selecting 200 samples from CLEVR that were not seen in the training set, as well as 200 counting problems from the out-of-distribution Super-CLEVR dataset.

Math VQA. GeoQA [17] is a large-scale geometric question answering dataset that contains 4,998 geometric problems collected from real math exams in Chinese middle school. Each problem is accompanied by annotated programs illustrating the solution process. While this dataset features multiple-choice questions, we increase the difficulty in this paper by removing the answer choices and requiring the model to generate the answers directly. We select a subset of 1k problems that involve computing angles and side lengths for training and test the model on this training set.

GUI Agent. AITZ [13] is a dataset designed for the graph user interface (GUI) navigation task derived from the large-scale mobile benchmark Android-in-the-wild (AITW [41]). It features a unique annotation called chain-of-action thought (CoAT), establishing a connection between perception—specifically, the understanding of screen layouts and UI elements—and cognition, which involves action decision-making. The AITZ dataset includes 2,504 operational trajectories that encompass 18.6K real-world intentions. Additionally, it is categorized into five subsets based on application domains: General, Install, GoogleApps, Single, and WebShopping. We train the model using the General domain with a dataset of randomly selected 1k examples and evaluate its performance on the corresponding test sets, as well as on other out-of-distribution domains.

F Setup

We use Llamafactory [42] for the SFT stage with full parameters, and the training time is no longer than 15 minutes for both Qwen2.5-VL-3B/7B models. We set $\theta = 0.14$ following [19]. We use vLLM [40] and the zero1_no_optimizer GRPO settings to optimize further:

Table 6: Training Parameters for the first SFT of TON

Parameter	Value
cutoff_len	2048
per_device_train_batch_size	8
gradient_accumulation_steps	1
learning_rate	1.0e-5
lr_scheduler_type	cosine
warmup_ratio	0.1
epoch	2

Table 7: Training Parameters for the second GRPO stage of TON in general/agent

Parameter	Value
max_prompt_length	4096
max_completion_length	2048
per_device_train_batch_size	1
gradient_accumulation_steps	2
learning_rate	1e-6
lr_scheduler_type	constant
bf16	true
β	0.04
gradient_checkpointing	true
attn_implementation	flash_attention_2
min_pixels	3136
max_pixels	501760
temperature	1.0
num_generations	8
step	100

Table 8: Training Parameters for the second GRPO stage of TON in math

Parameter	Value
max_prompt_length	4096
max_completion_length	2048
per_device_train_batch_size	1
gradient_accumulation_steps	2
learning_rate	1e-6
lr_scheduler_type	constant
bf16	true
β	0.04
attn_implementation	flash_attention_2
min_pixels	3136
max_pixels	501760
temperature	1.0
num_generations	4
step	300

G Experiments

G.1 TON on Math-GeoQA

Figure 8 & 9 illustrate the progression of various variables throughout the training process.



Figure 8: TON and GRPO visualization during the training process on Qwen2.5-VL-3B on GeoQA.



Figure 9: TON and GRPO visualization during the training process on Qwen2.5-VL-7B on GeoQA.

G.2 TON on Counting-CLEVR

Figure 10 illustrates the progression of various variables throughout the training process.

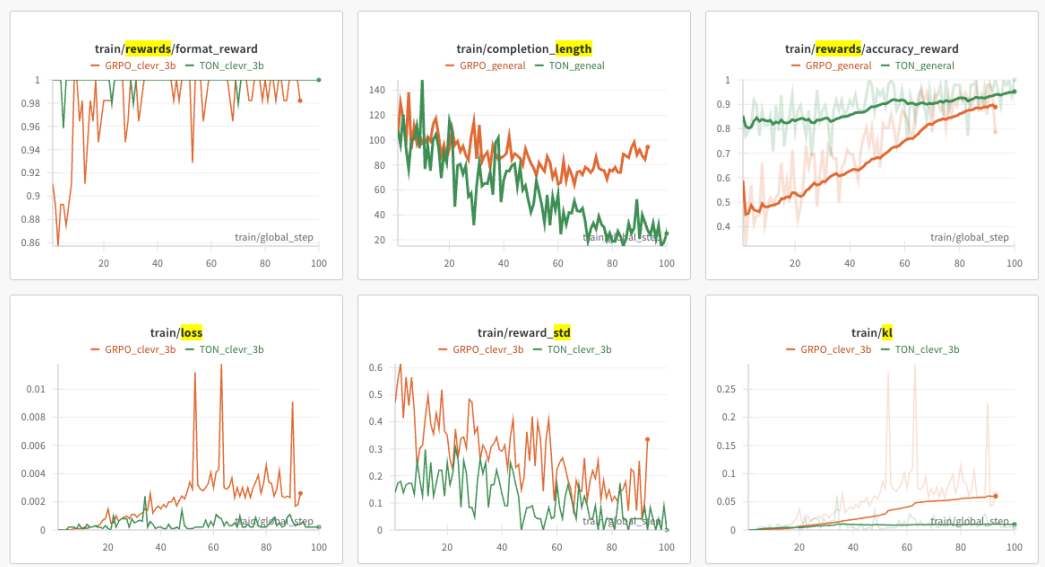


Figure 10: TON and GRPO visualization during the training process on Qwen2.5-VL-3B on CLEVR.

G.3 TON on Mobile Agent-AITZ

Figure 11 & 12 illustrate the progression of various variables throughout the training process.



Figure 11: TON and GRPO visualization during the training process on Qwen2.5-VL-3B on AITZ.



Figure 12: TON and GRPO visualization during the training process on Qwen2.5-VL-7B on AITZ.

G.4 OOD Performance of TON on CLEVR

Table 9 compares the IID and OOD performance of TON and vanilla GRPO. TON demonstrates superior performance in both IID and, particularly, OOD scenarios under easy reasoning tasks, helping to avoid overfitting to the training set of vanilla GRPO.

Table 9: Qwen2.5-VL-3B on the IID domain CLEVR and OOD domain Super-CLEVR.

		CLEVR	Super-CLEVR
	think	acc	acc
base		64	57.3
SFT	✓	88.5	13.17
GRPO	✓	93.5	51.9
TON	ours	98.5	62.79

G.5 Different Thought Dropout Probabilities

Figure 13 illustrates the progression of various variables throughout the training process under different dropout probabilities.



Figure 13: GRPO visualization during the training process on Qwen2.5-VL-3B on AITZ under dropout probabilities 20%, 50%, 80%.

G.6 Skip-thought Ratio on Different benchmarks

Figure 21 illustrates the skip-thought ratios under TON throughout the training process under different VQA benchmarks.

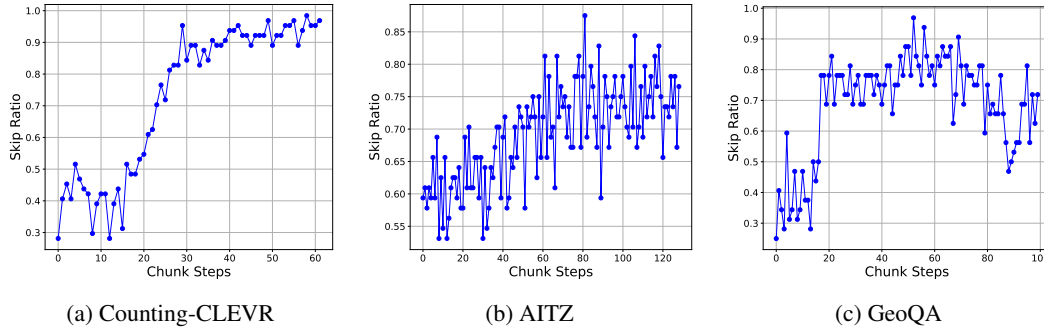


Figure 14: Skip Ratio of the output thinking during our TON training on three benchmarks.

G.7 Prompt v.s. SFT on different benchmarks

Figure 15 & 16 & 17 illustrate the progression of various variables throughout the training process between injecting the skip-thought during the prompt and the SFT stage.

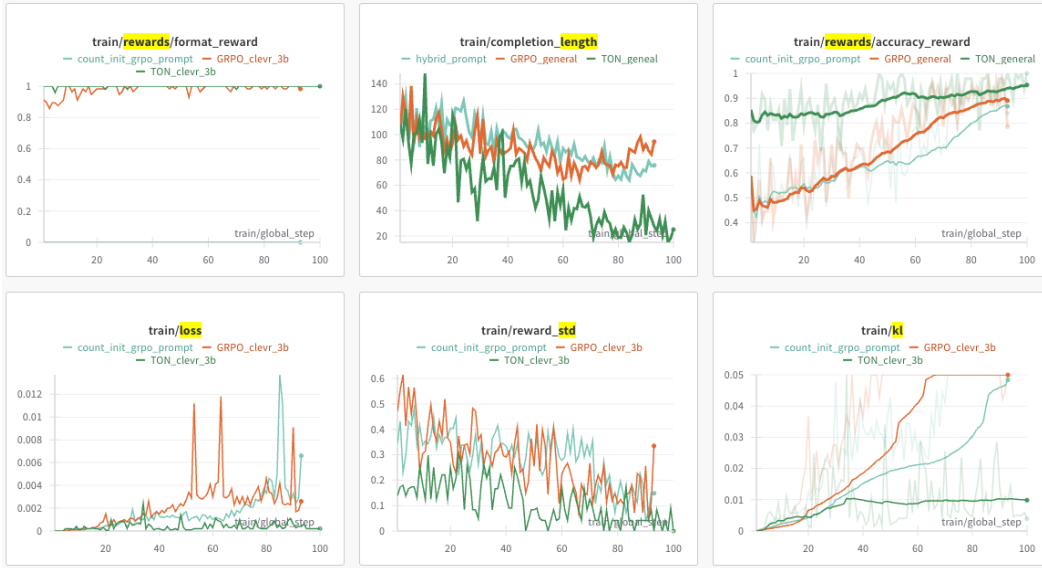


Figure 15: hybrid prompt v.s. SFT visualization during the training process on Qwen2.5-VL-3B on clevr.


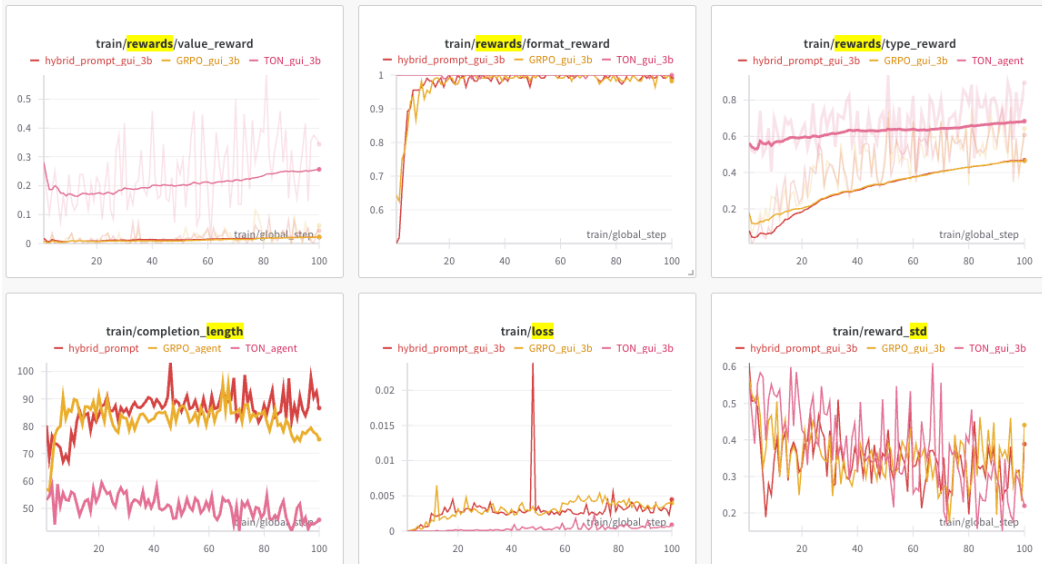


Figure 16: hybrid prompt v.s. SFT visualization during the training process on Qwen2.5-VL-3B on AITZ.



Figure 17: hybrid prompt v.s. SFT visualization during the training process on Qwen2.5-VL-3B on GeoQA.


G.8 Visualization Examples



Q: As shown in the figure, triangle ABC is the inscribed triangle of circle O, angle OAB = 35.0, then the degree of angle ACB is ()

`<think>`
 In the given problem, we have triangle ABC inscribed in circle O with center O. We are given that angle OAB = 35°. To find the measure of angle ACB, we can use the property of angles in a circle where an angle inscribed in a semicircle is a right angle (90°). However, since we are not directly dealing with a semicircle but rather a triangle, we need to consider the properties of angles subtended by the same arc. Since O is the center of the circle, OA and OB are radii of the circle, making triangle AOB an isosceles triangle with OA = OB. The angle at the center (angle AOB) is twice the angle at the circumference (angle ACB), because the angle at the center is twice the angle at the circumference when they subtend the same arc. Given that angle OAB = 35°, and knowing that OA = OB, angle OBA is also 35°. Therefore, angle AOB = 180° - 35° - 35° = 110°. Since angle ACB is half of angle AOB, angle ACB = 1/2 * 110° = 55°.
`</think>`


`<answer>55°</answer>`



Q: As shown in the figure, AB // CD, and EF intersects AB and CD at points E, F, angle 1 = 50.0, then the degree of angle 2 is ()

`<think>`Since AB is parallel to CD, we can use the property that corresponding angles formed by a transversal with two parallel lines are equal. Therefore, angle 1 is equal to angle AFE because they are corresponding angles. Given that angle 1 is 50 degrees, it follows that angle AFE is also 50 degrees. Now, since angle 2 is an exterior angle to triangle AFE, it is equal to the sum of the two opposite interior angles, which are angle AFE and angle 2 itself. However, since angle AFE is already 50 degrees, angle 2 must be 180 degrees minus 50 degrees to satisfy this condition. Therefore, angle 2 = 180 - 50 = 130 degrees.
`</think>`

`<think>\n\n</think><answer>130</answer>`



Task: Set an alarm for 12pm

`<think>`
 The time set in the popup is currently wrong; it is at 12:00 AM. Possible actions are to click on the "PM" indicator and then adjust the minutes to "00" to set the correct alarm for 12:00 PM, followed by clicking the "OK" button to confirm the new alarm time.
`</think>`

`<answer>{'action': 'CLICK', 'value': None, 'position': [0.51, 0.7]}</answer>`



Task: Install the Facebook app

`<think>`
 The user wants to install the Facebook app, but the current screen shows the Lift app, which suggests an incorrect entry. Possible actions are to use the search bar at the top to type in "Facebook app" and then search for it, or stop and correct the search entry to "Facebook app" to proceed with the installation.
`</think>`

`<think>\n\n</think><answer>{'action': 'TYPE', 'value': 'facebook app', 'position': None}</answer>`

Figure 18: Examples of TON on math VQA and GUI agent VQA settings.

Counting examples from CLEVR [15]

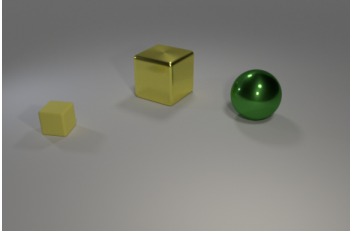
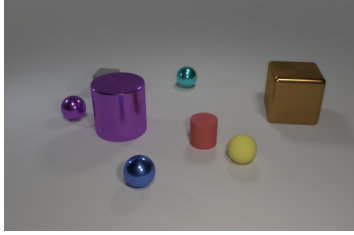
		
Question	How many items are there in the image?	How many items are there in the image?
GRPO's outputs	<think>The image shows three objects: a large green cylinder from 1919, a large teal sphere, and a large golden sphere. Both the teal and golden spheres appear to be in a translucent state, indicating that they are metallic. The green cylinder is plain and opaque, without any reflective properties. 1. Green Cylinder: Transparent (metallic) 2. Teal Sphere: Transparent (metallic) 3. Golden Sphere: Transparent (metallic) The question seems to ask for the count of items, and considering that all three objects are distinguishable from each other as separate items in the image, the count is three. </think> <answer>3</answer>	<think> - I count six distinct objects in the picture: a large green matte cylinder, a blue matte cylinder, a large green reflective sphere, a large blue matte cube, a small blue matte cube, a light blue rubber object, a shiny silver cube, a large reflective blue object, a silver or dark green reflective sphere, a shiny purple metallic cylinder, and a blue matte sphere. - I observe the reflective surface properties of the objects around the central large green sphere. - I also note the size and color variety of each object as described by the visual cues. </think> <answer>10</answer>
TON's outputs	<think>\n\n</think> <answer>3</answer>	<think>Okay, let's check this out. The user provided a image with several objects and their properties. Each entry starts with "A" followed by attributes like size, color, material, shape, rotation, 3D coordinates, and pixel coordinates. First, I need to count how many items there are. Let me list each entry one by one. 1. "A small purple rubber sphere..." That's the first item. 2. "A large yellow rubber cube..." Second item. 3. "A small gray rubber cube..." Third. 4. "A large green rubber cylinder..." Fourth. 5. "A small blue metal cube..." Fifth. 6. "A small green metal sphere..." Sixth. 7. "A large brown metal cube..." Seventh. 8. "A small green rubber cylinder..." Eighth. Wait, that's eight distinct entries. Each one has unique combinations of attributes. I can't see any duplicates. Each has different values for color, size, material, rotation, or coordinates, so they're separate. So yes, there are eight items in total. </think> <answer> 8 </answer>

Table 10: Counting example from CLEVR [15]. Although the question is simple, the two conditioned images differ significantly in difficulty: the left image is clearly easier, while the right involves greater complexity due to object occlusion. TON demonstrates selective activation of reasoning—engaging thought only when needed—whereas GRPO generates reasoning traces for both cases indiscriminately.

G.9 Prompt for AITZ task

AITZ System Prompt

You are an assistant trained to navigate the mobile phone. Given a task instruction, a screen observation, and an action history sequence, output the next action and wait for the next observation.

Here is the action space:

- 1. 'CLICK': Click on an element, value is not applicable and the position [x,y] is required.
- 2. 'TYPE': Type a string into an element, value is a string to type and the position is not applicable.
- 3. 'SCROLL UP': Scroll up for the screen.
- 4. 'SCROLL DOWN': Scroll down for the screen.
- 5. 'SCROLL LEFT': Scroll left for the screen.
- 6. 'SCROLL RIGHT': Scroll right for the screen.
- 7. 'PRESS BACK': Press for returning to the previous step, value and position are not applicable.
- 8. 'PRESS HOME': Press for returning to the home screen, value and position are not applicable.
- 9. 'PRESS ENTER': Press for submitting the input content, value and position are not applicable.
- 10. 'STATUS TASK COMPLETE': Indicate the task is completed, value and position are not applicable.

Format the action as a dictionary with the following keys: {'action': 'ACTION TYPE', 'value': 'element', 'position': [x,y]}

If value or position is not applicable, set it as 'None'. Position represents the relative coordinates on the screenshot and should be scaled to a range of 0-1.

Think Prompt

Please first thinks about the reasoning process in the mind and then provides the user with the action. The reasoning process and answer are enclosed within <think> </think> and <action> </action> tags, respectively, i.e., <think> reasoning process here </think><action> action here </action>

Overall Prompt

```
{AITZ System Prompt}
{Think Prompt}
Task: {Task}
<image>
Action history: {Action history}
**Next action:**
```

H Supplementary

H.1 Comprehensive Comparison of Length, Rewards, and Skip Ratio Across Three Benchmarks

We present a comprehensive comparison of length, rewards, and skip ratio across three benchmarks. The results reveal a consistent trend: TON reduces completion length and increases the skip ratio as rewards increase during training.

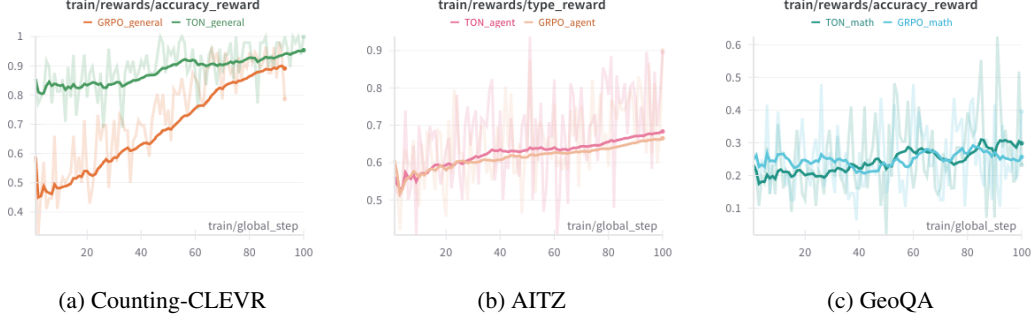


Figure 19: **Rewards of the output** during our TON training on three benchmarks.



Figure 20: **Completion length of the output** during our TON training on three benchmarks.

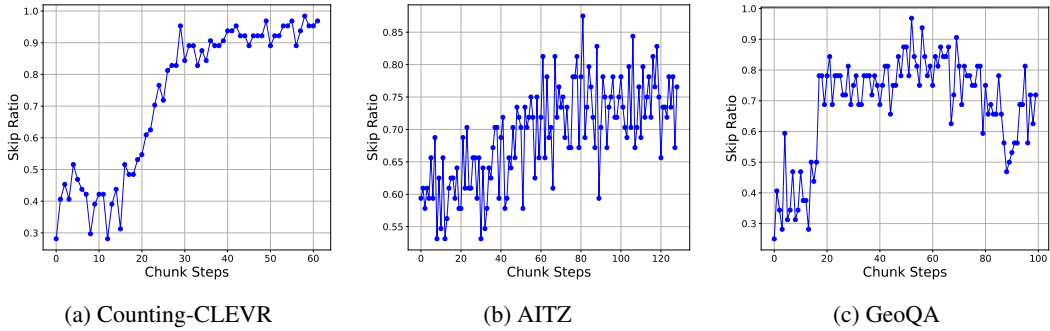


Figure 21: **Skip ratio of the output thinking** during our TON training on three benchmarks.

H.2 Reward for length rather than SFT

We give the reward $r_l = 1$ for the model if it outputs `<think>\n\n</think>`, and otherwise 0. We observe that the length reward remains at 0 during the first 100 steps. The visualization of the entire training process is shown below, highlighting our proposed thought dropout in the SFT stage.



Figure 22: Length penalty rewards and completion length on AITZ datasets on Qwen2.5-VL-3B.


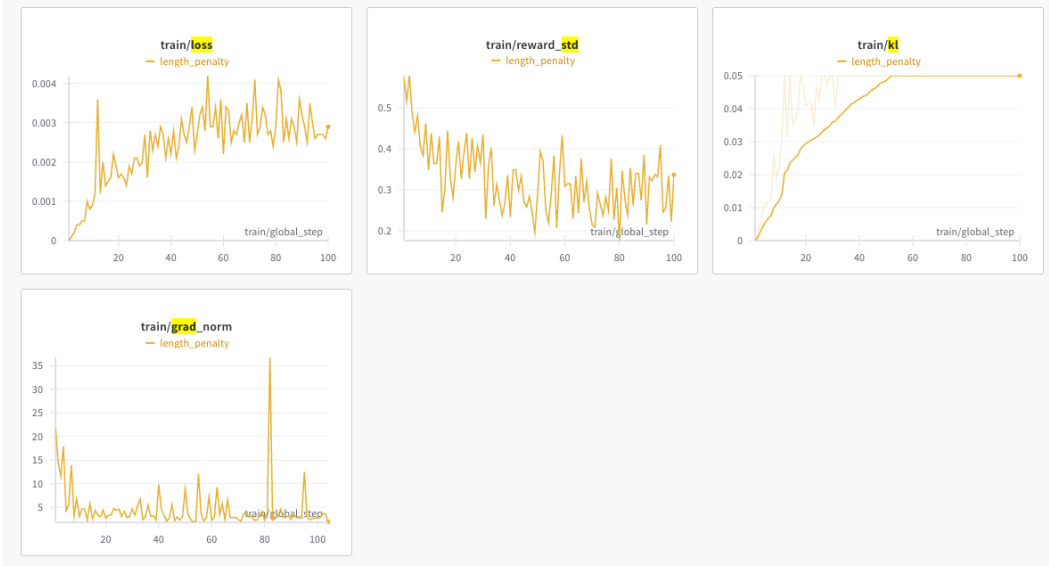


Figure 23: Length penalty rewards and completion length on AITZ datasets on Qwen2.5-VL-3B.

H.3 More cases

We give more cases to show the effectiveness and efficiency of our proposed TON.

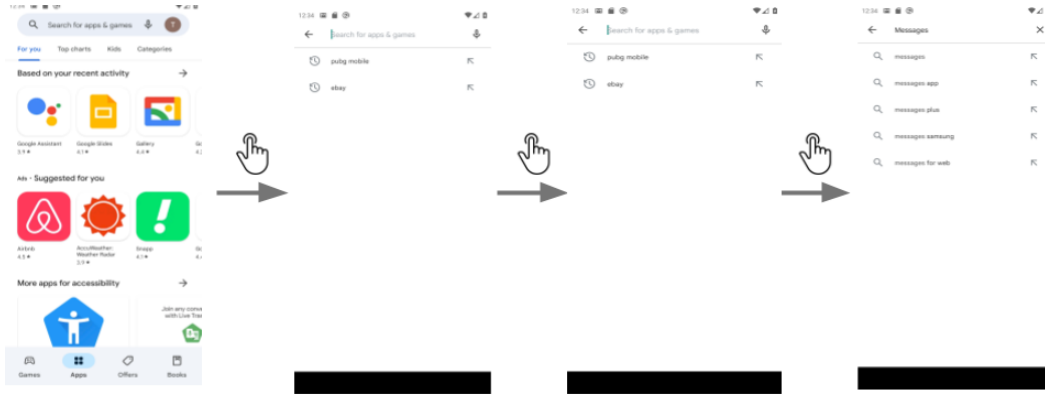

Query: Uninstall Messages.


<think>\n\n<think><action>{'action': 'CLICK', 'value': None, 'position': [0.07, 0.48]}</action>

<think>\n\n<think><action>{'action': 'TYPE', 'value': 'Messages', 'position': None}</action>

<think>\n\n<think><action>{'action': 'TYPE', 'value': 'Messages', 'position': None}</action>

<think>\n\n<think><action>{'action': 'CLICK', 'value': None, 'position': [0.12, 0.27]}</action>

Figure 24: TON applied to the AITZ out-of-distribution domain: the task is to uninstall the messaging apps. TON performs well without extensive reasoning.

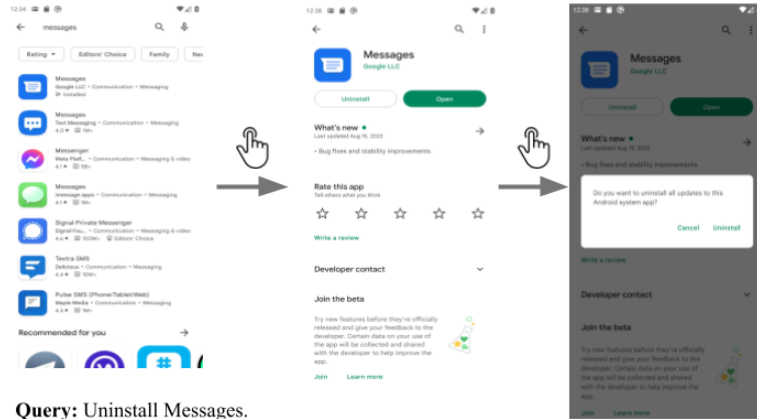

Query: Uninstall Messages.



<think>\n\n<think><action>{'action': 'CLICK', 'value': None, 'position': [0.23, 0.31]}</action>

<think>\n\n<think><action>{'action': 'CLICK', 'value': None, 'position': [0.23, 0.35]}</action>


<think>\n\n<think><action>{'action': 'CLICK', 'value': None, 'position': [0.58, 0.76]}</action>

Figure 25: TON applied to the AITZ out-of-distribution domain: the task is to uninstall the messaging apps. TON performs well without extensive reasoning.

Table 11: Counting example from SuperCLEVR [16]. Although the question is out-of-distribution, the performance of TON and vanilla GRPO differs significantly in their outputs. The output from vanilla GRPO is excessively lengthy (over 500 tokens), focusing more on reasoning rather than providing a direct answer. In contrast, TON delivers a concise response, effectively bypassing the lengthy reasoning process.

Counting examples from SuperCLEVR [16]		
		
Question	How many objects are either small green wagons or buses?	How many other objects are there of the same color as the matte car?
GRPO's outputs	"<think>, let's tackle this question step by step. The user is asking how many objects are either small green wagon-sör buses. I need to check each object in the image provided., let's parse the image. There are six objects listed:1. A large blue rubber scooter with specific coordinates and rotation.2. A small yellow rubber car (wagon) with details.3. A small brown rubber bicycle.4. A large red rubber tandem bicycle.5. A small gray metal dirt bike.6. A large gray metal school bus.question is about two categories: small green wagons and buses. Let's break down each part.with small green wagons: Looking at the list, there's a small yellow rubber car which is a wagon. The color here is yellow, not green. So that doesn't fit. Are there any other small green wagons? The other objects are all different colors and types. The only green object mentioned is the first one, but it's a scooter, not a wagon. So no small green wagons exist in the scene., buses: The sixth object is a large gray metal school bus. Since the question says ",	
TON's outputs	<think>\n\n</think> <answer>1</answer>	<think>\n\n</think> <answer>3</answer>

Q: As shown in the figure, $AB \parallel CD$, straight line EF intersects AB at point E , intersects CD at point F , EG bisects angle BEF , and it intersects CD at point G , angle $1 = 50.0$, then angle 2 is equal to ()



TON:


<think>\n\n</think><answer>65</answer>

GRPO:

<think>\nTo solve for angle 2, we need to use the properties of parallel lines and angle bisectors.\n\n1. Since AB is parallel to CD , and EF is a transversal, angle BEF and angle BFG are supplementary angles because they form a linear pair.\n2. Given that angle 1 is 50 degrees, and since EG bisects angle BEF , angle BEG must be half of angle BEF .\n3. Therefore, angle $BEG = 90 - 50 = 40$ degrees.\n4. Since EG bisects angle BEF , angle $BEG =$ angle $FEG = 40$ degrees.\n5. Now, angle 2 is the same as angle FEG because they are corresponding angles formed by the transversal EF intersecting the parallel lines AB and CD .\n6. Therefore, angle 2 = 40 degrees.\n\n</think>\n\n<answer>40</answer>

Figure 26: Comparison between TON and vanilla GRPO in GeoQA

Q: As shown in the figure, AB is tangent to circle O at point B , and the extended line of AO intersects circle O at point C . Connect BC , if angle $A = 36.0$, then angle C is equal to ()



TON:

<think>\n\n</think><answer>27</answer>

GRPO:

<think>\nTo solve for the measure of angle C , we need to use properties of circles and tangents.\n\n1. **Identify the given information:**\n - AB is tangent to circle O at point B .\n - Angle A is 36 degrees.\n - We need to find the measure of angle C .\n2. **Use the property of the tangent:**\n - Since AB is tangent to the circle at point B , the radius OB is perpendicular to AB . Therefore, angle OBA is 90 degrees.\n3. **Determine angle OAB :OAB, the sum of the angles is 180 degrees.\n - So, angle $OAB +$ angle $A +$ angle $OBA = 180$ degrees.\n - Substituting the known values: angle $OAB + 36$ degrees $+ 90$ degrees $= 180$ degrees.\n - Simplifying, we get angle $OAB = 54$ degrees.\n4. **Identify angle COB :OC is a radius and OB is also a radius, triangle OBC is isosceles with $OB = OC$.\n - Therefore, angle $OCB =$ angle OBC .\n5. **Determine angle COB :COB subtends the same arc as the inscribed angle CBA .\n - The measure of the central angle is twice the measure of the inscribed angle that subtends the same arc.\n - So, angle $COB = 2 * \text{angle } CBA$.\n6. **Relate angles in triangle OBC :OBC, the sum of the angles is 180 degrees.\n - So, angle $OCB +$ angle $OBC +$ angle $COB = 180$ degrees.\n - Since angle $OCB =$ angle OBC , we can write: $2 * \text{angle } OCB +$ angle $COB = 180$ degrees.\n - Substituting angle $COB = 2 * \text{angle } CBA$, we get: $2 * \text{angle } OCB + 2 * \text{angle } CBA = 180$ degrees.\n - Simplifying, we get: $2 * \text{angle } OCB + 2 * 36$ degrees $= 180$ degrees.\n - This simplifies to: $2 * \text{angle } OCB + 72$ degrees $= 180$ degrees.\n - Solving for angle OCB , we get: $2 * \text{angle } OCB = 108$ degrees.\n - Therefore, angle $OCB = 54$ degrees.\n\nSo, the measure of angle C is 54 degrees.\n\n</think>\n\n<answer>54</answer>

Figure 27: Comparison between TON and vanilla GRPO in GeoQA

Q: As shown in the figure, the diameter CD of circle O crosses the midpoint G of chord EF, angle DCF = 20.0, then angle EOD is equal to ()



TON:


<think>\n\n</think><answer>40</answer>

GRPO:

<think>\nTo solve for the measure of angle EOD, we need to use properties of circles and angles.\n\n1. **Identify the given information:**\n - CD is the diameter of the circle.\n - G is the midpoint of the chord EF .
 - $\angle DCF = 20^\circ$.
2. **Understand the implications of the midpoint:**\n - Since G is the midpoint of EF , CG is perpendicular to EF . This means that $\angle CGE = 90^\circ$.
3. **Use the inscribed angle theorem:**\n - The angle subtended by an arc at the center of the circle is twice the angle subtended by the same arc at any point on the circumference.
 - Therefore, $\angle EOD$ (the central angle) is twice $\angle ECF$ (the inscribed angle).
4. **Determine the measure of $\angle ECF$:\angle DCF = 20^\circ and $\angle CGE = 90^\circ$, we can find $\angle ECF$ as follows:
 $\angle ECF = 90^\circ - 20^\circ = 70^\circ$.
5. **Calculate $\angle EOD$: $\angle EOD = 2 \times \angle ECF = 2 \times 70^\circ = 140^\circ$.
Thus, the measure of angle EOD is 140° .</think><answer>140</answer>

Figure 28: Comparison between TON and vanilla GRPO in GeoQA

Q: In the provided figure, the city government is making plans to construct an overpass with a height AB measuring 6.0. If angle ACB represents the angle between the slope AC of the overpass and the ground BC, and the sine of angle ACB is equal to 3.0/5.0, what is the length of slope AC?

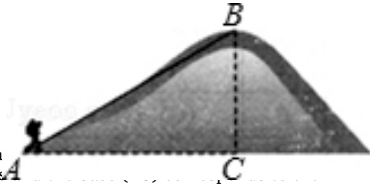

TON:

<think>The length of the slope AC can be calculated using the Pythagorean theorem. Since the ratio is 3:4, we can set up a right triangle where the height (AB) is 6.0 units and the horizontal distance is 8.0 units. Since the ratio is 3:4, we can use this to find the length of BC.

1. **Identify the ratio and relate it to the sides of the triangle:**

- Let the length of AB be h and the length of BC be d .

- Given $AB = 6.0$ units, and the ratio is 3:4, we can express d in terms of h :

$$\frac{h}{d} = \frac{3}{4}$$

Solving for d :

$$d = \frac{4}{3} \times 6.0 = 8.0 \text{ units}$$

2. **Apply the Pythagorean theorem to find the hypotenuse (AC):**

$$AC = \sqrt{AB^2 + BC^2}$$

Substituting the known values:

$$AC = \sqrt{6.0^2 + 8.0^2}$$

Calculate the squares:

$$6.0^2 = 36.0 \quad \text{and} \quad 8.0^2 = 64.0$$


Add these values:

$$AC = \sqrt{36.0 + 64.0} = \sqrt{100.0} = 10.0 \text{ units}$$

Therefore, the length of the slope AC is 10.0 units.</think><answer>10</answer>

Figure 29: Comparison between TON and vanilla GRPO in GeoQA

Q: In the provided figure, the city government is making plans to construct an overpass with a height AB measuring 6.0. If angle ACB represents the angle between the slope AC of the overpass and the ground BC, and the sine of angle ACB is equal to $\frac{3.0}{5.0}$, what is the length of slope AC?

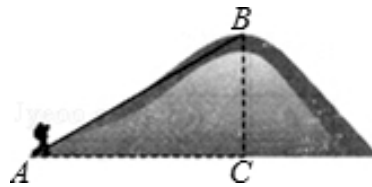

GRPO

<think>

To solve for the length of the slope AC, we can use the given information about the slope and the vertical height. The slope AC is in the ratio 3.0:4.0, and the vertical height AB is 6.0 units.

1. **Identify the components of the right triangle:**

- The vertical height (AB) is 6.0 units.
- The ratio of the horizontal length (BC) to the vertical length (AB) is 3.0:4.0, so we can denote BC as $\left(\frac{3}{4} \times AB\right)$.

2. **Calculate BC:**

- $\left(BC = \frac{3}{4} \times 6.0 = 4.5\right)$ units.

3. **Use the Pythagorean theorem to find AC:**

- The Pythagorean theorem states $\left(AC^2 = AB^2 + BC^2\right)$.
- Substitute the known values: $\left(AC^2 = 6.0^2 + 4.5^2\right)$.
- $\left(AC^2 = 36.0 + 20.25 = 56.25\right)$.
- $\left(AC = \sqrt{56.25} = 7.5\right)$ units.

Therefore, the length of the slope AC is 7.5 units.

</think>

<answer>

7.5

</answer>

Figure 30: Comparison between TON and vanilla GRPO in GeoQA