



# INTERLEAVED SCENE GRAPHS FOR TEXT-AND-IMAGE GENERATION EVALUATION

**Anonymous authors**

Paper under double-blind review

## ABSTRACT

Many real-world user queries (e.g. “How do to make egg fried rice?”) could benefit from systems capable of generating responses with both textual steps with accompanying images, similar to a cookbook. Models designed to generate interleaved text and images face challenges in ensuring consistency within and across these modalities. To address these challenges, we present ISG, a comprehensive evaluation framework for interleaved text-and-image generation. ISG leverages a scene graph structure to capture relationships between text and image blocks, evaluating responses on four levels of granularity: holistic, structural, block-level, and image-specific. This multi-tiered evaluation allows for a nuanced assessment of consistency, coherence, and accuracy, and provides interpretable question-answer feedback. In conjunction with ISG, we introduce a benchmark, ISG-BENCH, encompassing 1,150 samples across 8 categories and 21 subcategories. This benchmark dataset includes complex language-vision dependencies and golden answers to evaluate models effectively on vision-centric tasks such as style transfer, a challenging area for current models. Using ISG-BENCH, we demonstrate that recent unified vision-language models perform poorly on generating interleaved content. While compositional approaches that combine separate language and image models show a 111% improvement over unified models at the holistic level, their performance remains suboptimal at both block and image levels. To facilitate future work, we develop ISG-AGENT, a baseline agent employing a “*plan-execute-refine*” pipeline to invoke tools, achieving a 122% performance improvement.

## 1 INTRODUCTION

With the proliferation of multimodal language models, it has become apparent that users want models that can simultaneously generate both texts as well as images (Huang et al., 2016; Miech et al., 2019). Consider a scenario where a user asks “How to make egg fried rice?” (Figure 1). Answering this query in language - with a list of steps - is one reasonable answer. A more ecological response would follow the style of cookbooks; i.e., by creating intermediate images of the cooking process alongside those steps. Enabling such *multimodal* responses is possible by leveraging a language generation model (Yuan et al., 2022; Gómez-Rodríguez & Williams, 2023) in tandem with a separate image generation model (Rombach et al., 2022; Betker et al., 2023; Blattmann et al., 2023). But the need for dual models slows down inference as both models have to be loaded and run in sequence. Many practical applications, such as writing storybooks (Huang et al., 2016) or generating illustrated instructions (Miech et al., 2019), require generating interleaved images and text.

The community has begun designing unified models with the capability of generating interleaved texts and images for the aforementioned use cases (Zhou et al., 2024; Li et al., 2024b; Chern et al., 2024). However, generating multiple modalities is challenging. The generations between modalities need to maintain consistency, between multiple images, between multiple sentences, and across the generated images and sentences. Benchmarks for such challenges are still in their infancy (Chen et al., 2024d). **1)** Previous benchmarks primarily focus on language-dominate tasks, meaning that queries can be solved with only textual output, thereby not adequately assessing multimodal generation capabilities (Liu et al., 2024d). **2)** The queries in existing benchmarks are free-form without reference answers, making them ambiguous for evaluating multimodal instruction-following generation (An et al., 2023). **3)** Existing benchmarks mainly use an evaluation paradigm called LLM-as-

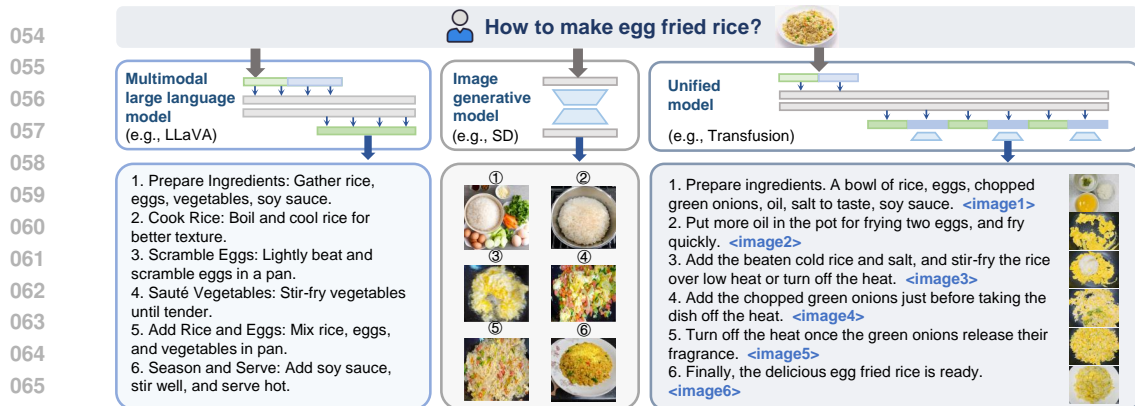


Figure 1: An illustration of differences of each generative model performance on  $\text{A}$  (vision-language dominate) tasks, with merely text and image output cannot address the user’s problem. See Section 3.2 for how we define  $\text{A}$  (vision dominate) and  $\text{A}$  (language-dominant). **Left:** Text Generation; **Middle:** Image Generation; **Right:** Interleaved Text-and-Image Generation.

a-Judge (Chen et al., 2024a; Ye et al., 2024), where GPT4 or equivalent model is used for holistic evaluation with their pretrained knowledge (Xia et al., 2024). There is a need for more fine-grained assessment to validate the semantics of each text and image, the consistency between images, the connection between each text and its neighboring image, etc.

We present INTERLEAVED SCENE GRAPH (ISG), an evaluation framework for interleaved image-and-text generation. Conceptually, ISG borrows the scene graph representation as the underlying semantic representation connecting images and text (Krishna et al., 2017; Johnson et al., 2018). ISG automatically parses queries into a scene-graph-like structure, where text and image *blocks* serve as nodes and their relationships as edges. We define a block as a continuous sequence of text or sequence of image tokens. Based on this graph representation, ISG proposes an evaluation protocol across four levels of granularity: holistic (evaluates the entire response in its entirety), structural (evaluates the relationship between blocks), block (evaluates the accuracy within each block), and image (evaluates the contents of an image). The framework translates user queries into (TIFA-like (Hu et al., 2023)) interpretable question answers at each level, enabling systematic and interpretable assessments, and addressing a critical gap in existing research.

Based on ISG, we introduce a benchmark containing user queries with detailed question-answers for evaluating each query across the four levels. ISG-BENCH consists of 8 categories, 21 subcategories classified by their instruction types, and 1,150 manually collected samples, all incorporating both language-vision dependencies and golden answers to solve the above-mentioned problems. All samples are meticulously collected from previous datasets or built from scratch for high quality. Unlike existing benchmarks, we prioritize *vision-centric* tasks, such as *style transfer*, where the image outputs have specific requirements. Table 1 displays the difference between current interleaved benchmarks and datasets. To validate the accuracy of our evaluation, we compare our automated evaluations with human-annotated judgments across all four levels. ISG shows a Pearson similarity of 0.718 and 0.907, outperforming previous evaluation methods in alignment with humans.

With ISG-BENCH, we evaluate nine accessible interleaved text-and-image generative methods, including five recently popular unified models (e.g., Show-o (Xie et al., 2024), Anole (Chern et al., 2024)), four compositional frameworks (e.g., Claude + SD3 (Esser et al., 2024)). Empirical results demonstrate that current unified models still exhibit significant room for improvement in both instruction following and generation quality. Compositional frameworks significantly outperform unified models in generating high-quality multimodal content, achieving an average holistic score of 6.262 compared to 2.961 from the best unified model (CoMM-MiniGPT-5). However, they still fall short at the block and image levels for accurate generation due to their separate understanding and generation structure, especially in Vision-dominated tasks.

Based on the superior performance of compositional frameworks, we propose ISG-AGENT as a compositional baseline for future comparisons. ISG-AGENT generates interleaved text and images through a “Plan-Execute-Refine” pipeline (Wang et al., 2024). Specifically, it first produces a plan of tool usage and subsequently executes these advanced tools for interleaved generation, followed

Table 1: Comparison with existing multimodal interleaved benchmarks. **GT**: Ground truth. **Acc**: Accuracy. **MG**: Multi-granular. : Image-dominate, **A**: Language-dominate, **A**: Both.

Name	#Sample	GT	Benchmark			Evaluation			Fine-grained Levels				
				<b>A</b>	<b>A</b>	MLLM	Acc	MG	Holistic	Structural	Block	Image	
MMC4 (Zhu et al., 2024)	- †	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗
CoMM (Chen et al., 2024d)	- *	✓	✗	✓	✓	✓	✗	✗	✓	✗	✗	✗	✓
OpenLeaf (An et al., 2023)	30	✗	✗	✓	✓	✓	✗	✗	✓	✗	✗	✗	✗
InterleavedBench (Liu et al., 2024d)	815	✗	✗	✗	✓	✓	✗	✗	✓	✗	✗	✗	✗
MMIE (Xia et al., 2024)	20,103	✓	✗	✓	✓	✓	✗	✗	✓	✗	✗	✗	✗
<b>ISG-BENCH (Ours)</b>	1,150	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

† MMC4 contains 101M documents with 571M images.

\* CoMM contains 227K documents with 2.28M images in both training and test set.

by a refinement process for better text-and-image alignment and error fixing. Notably, ISG-AGENT outperforms all other baselines across all four evaluation levels. It achieves an impressive Structural accuracy of 0.871, markedly outperforming the previous best of 0.385 from Gemini. These results underline ISG-AGENT’s effectiveness in generating coherent interleaved content, paving the way for more advanced instruction-following agents in multimodal generation and creative applications.

## 2 RELATED WORK

**Interleaved Text-and-Image Generation.** Recent advancements in MLLMs (GeminiTeam, 2023; OpenAI, 2024; 2023; Li et al., 2024a) and diffusion models (Rombach et al., 2022; Esser et al., 2024; Flux, 2024) have led to a surge in research aimed at integrating autoregressive architectures (Liu et al., 2024c; Sun et al., 2024a) for both multimodal understanding (Yue et al., 2024; Li et al., 2023b) and generation tasks (Ghosh et al., 2024; Huang et al., 2023). For understanding, early research has effectively integrated visual perception with pre-trained LLMs using simple visual tokenization (Li et al., 2023a) or projection methods (Li et al., 2023c; 2024a), yielding promising results. Multimodal generation, on the other hand, was initially achieved using pre-trained text-to-image models (Li et al., 2024b; Wu et al., 2023) or through an autoregressive process, where generated tokens are decoded into images (Team, 2024; Chern et al., 2024; Koh et al., 2024). Recently, researchers have started to explore the integration of Transformers and diffusion models, with the aim of unifying multimodal understanding and generation tasks within a single framework (Zhou et al., 2024; Xie et al., 2024; Wu et al., 2024b), demonstrating potential in interleaved generation of texts and images.

**Automatic Interleaved Text-and-Image Evaluation.** Originating from early text summarization in NLP (Narayan et al., 2018), QA-based evaluation methods automatically transform prompts into questions and use them to validate generated content (Durmus et al., 2020; Deutsch et al., 2020; Eyal et al., 2019). In the multimodal domain, particularly in text-to-image generation, VQA-based evaluation methods transfer text into atomic questions and conduct VQA to verify generated images, providing enhanced fine-grained and interpretable benchmark results (Cho et al., 2023; Lin et al., 2024). Notably, TIFA (Hu et al., 2023) pioneered the use of VQA for automatic evaluation, with multiple subsequent enhancement (Lu et al., 2024; Ghosh et al., 2024; Cho et al., 2024; Chen et al., 2024a). However, evaluating interleaved generations remains challenging. Table 1 shows that existing benchmarks (An et al., 2023; Liu et al., 2024d) heavily rely on zero-shot MLLM-as-a-Judge or traditional metrics (Chen et al., 2024d;b), leading to rough and coarse-grained assessment results.

## 3 INTERLEAVED SCENE GRAPH

We introduce ISG (Figure 2), a comprehensive automatic evaluation framework for interleaved text-and-image generation assessment. Using ISG, we introduce ISG-BENCH, a benchmark for evaluating image-and-text generation.

### 3.1 THE EVALUATION FRAMEWORK

The framework automatically interprets queries into a scene-graph-like structure, where text and image blocks serve as nodes and their relationships as edges. Based on this graph representation, we can perform comprehensively four-level assessment: holistic, structural, block, and image. At each level, the framework generates several question-answer pairs that can be used to evaluate whether a response appropriately answers the query. At the macro level, structural and holistic questions

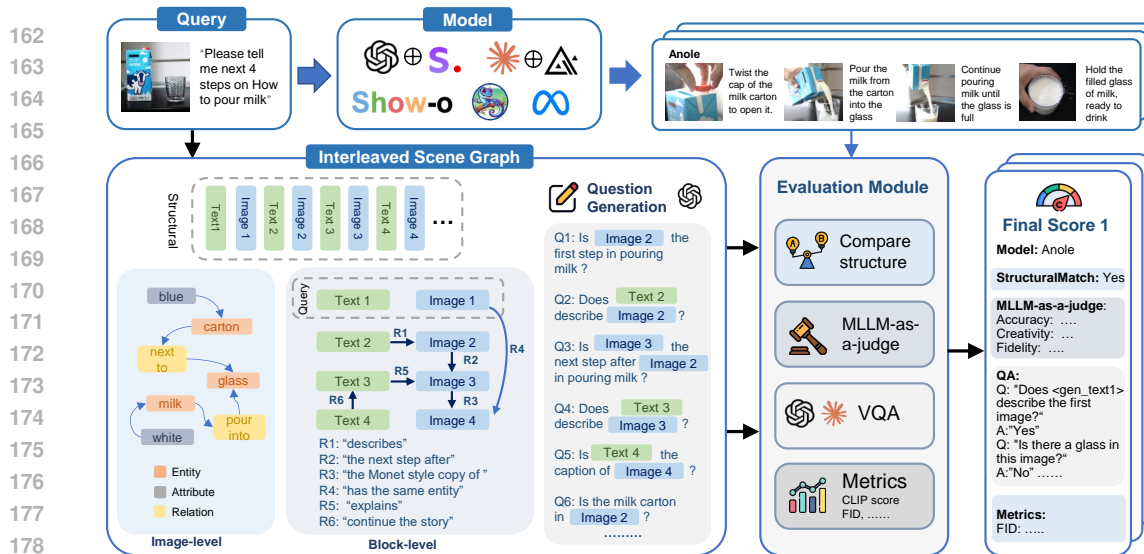


Figure 2: ISG first interprets the user’s query into a scene-graph-like structure to enable fine-grained assessment at three levels: **1)** At the structural level, ISG predicts the query’s interleaved structure; **2)** At the block level, nodes represent text-image blocks connected by requirement edges; **3)** At the image level, the graph consists of entities, their attributes, and their relationships. Finally, ISG converts each element within the graph structure into questions, evaluates the model’s interleaved output using a QA module, and subsequently summarizes these results into a comprehensive assessment.

analyze the overall response coherence and quality; while block and image questions assess how accurately each content module adheres to the user’s instructions.

- **Structural** questions evaluate whether the response strictly follows the structural requirement in the user’s query. As shown in Figure 2, given structural requirement “*generate image first followed by an instruction*”, the correct structure should consist of 4 images interleaved by 4 text blocks. We leverage an LLM to predict the generated structure based on the query and subsequently evaluate answers through direct structural matching.
- **Holistic** questions assess the overall text-image alignment, coherence, and helpfulness by inputting the multimodal query, response, and human-annotated golden answer into an MLLM, which then outputs judgments on the entire answer. Building on previous work (An et al., 2023; Liu et al., 2024d), we enhance the process by employing MLLM-as-a-Judge with golden answers and the “Analyze-then-Judge” Chain-of-Thought (CoT) (Wei et al., 2022). This allows for a more human-aligned evaluation, assessing generation quality, text-image alignment, and helpfulness to yield a comprehensive score.
- **Block** questions evaluate fine-grained details within each block. We initially represent the prompt  $P$  as subject-object-relation tuples (sub, obj,  $r$ ), such as  $\langle \text{Text } 1, \text{Image } 1, \text{Describe} \rangle$  in the example of Figure 2, where {sub, obj} are nodes that denotes image or text block and  $r$  is edge that denotes an atomic open-vocabulary requirement. Subsequently, we generate questions from these tuples and evaluate them using the VQA module, with MLLMs providing “Yes-or-No” and “1-10 score” answers. We also attempt to use CLIPScore (Hessel et al., 2021) for assessing text-image relations, but it fails due to the text block exceeding the text encoder’s limit of 77 tokens.
- **Image** questions assess the semantic content of images. We transform multimodal queries into dependency-aware tuples that comprise entities, relations, and attributes, each linked to specific generated images, particularly for vision-dominant tasks such as “Style Transfer” and “Multi-Angle Object” that have concrete referential answers, whereas the “Painting” task requires only the accurate generation of the final image. In contrast, tasks such as “HowTo” demand the inclusion of specific objects but allow flexibility in other aspects. We categorize tasks based on the requirement of image generation in the answers as shown in Table 2. These tuples might include  $\langle \text{Image } 1, \text{Entity}, \text{Cat} \rangle$  and  $\langle \text{Image } 1, \text{Relation}, \text{Cat}, \text{on the right of}, \text{Dog} \rangle$ . Subsequently, we employ an LLM to generate questions with dependencies and evaluate image generation using these questions via a VQA module (Cho et al., 2023).

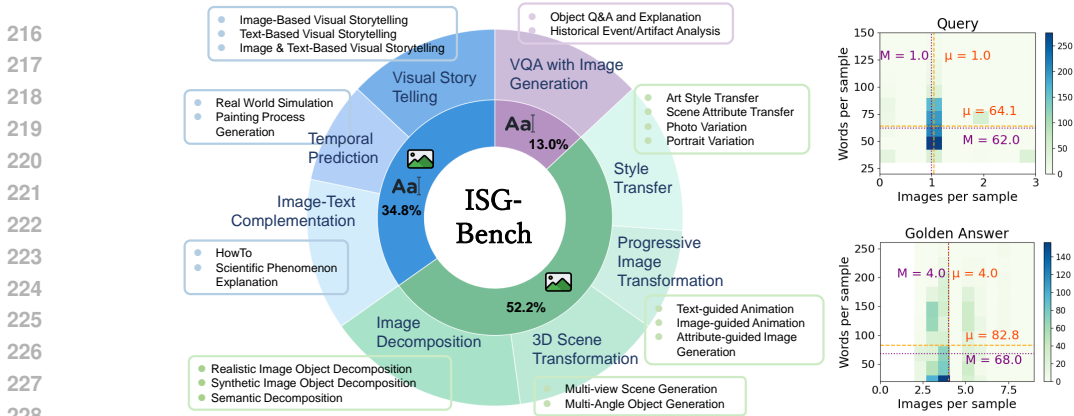


Figure 3: **Left:** An overview of ISG-BENCH. **Right:** Distribution analysis of textual content length and image count for queries and golden answers.

Table 2: Task definitions and additional evaluation dimensions for ISG-BENCH. **Modal:** dominant modality in response evaluation; **Image:** the level of accurate image generation requirements.

Task	Description	Modal	Image	Subtask	# Sample
Style Transfer	Generate a sequence of transformed images with corresponding text descriptions.	🖼️	🖼️	Art Style Transfer	50
				Scene Attribute Transfer	50
				Photo Variation	50
				Portrait Variation	50
Image Decomposition	Segment input image into visual elements with text descriptions.	🖼️	🖼️	Realistic Image Object Decomposition	50
				Synthetic Image Object Decomposition	50
				Semantic Decomposition	50
3D Scene Transformation	3D Transformation for images	🖼️	🖼️	Multi-view Scene Generation Multi-Angle Object Generation	50 50
Progressive Image Transformation	Generate a sequence of images that show gradual changes	🖼️	🖼️	Text-guided Animation	50
				Image-guided Animation	50
				Attribute-guided Image Generation	50
Temporal Prediction	Forecast future or past sequences	🖼️ A	🖼️	Real-world Simulation	50
				Painting Process Generation	50
Image-Text Complementation	Generate complementary visual or textual content	🖼️ A	🗄️	HowTo	100*
				Scientific Phenomenon Explanation	50
Visual Story Telling	Tell a coherent narrative story with images and texts	🖼️ A	🗄️	Image-based Visual Storytelling	50
				Text-based Visual Storytelling	50
				Image & Text-based Visual Storytelling	50
VQA with Image Generation	Provide texts and relevant images to answer the question	A	🗄️	Object Q&A and Explanation	100*
				Historical Event/Artifact Analysis	50

🖼️ denotes accurate image generation requirement for all objects, 🖼️ for main objects, and 🗄️ for no requirement.

\* For some datasets, we constructed 100 samples because they are more common in life.

For generating VQA questions in block and image levels, we implemented ISG with few-shot examples for in-context learning (Dong et al., 2022) and carefully verified these generated questions against human-annotated ground truth. For the evaluation of ISG-BENCH, refer to Section 4.1, and for technical details, see Appendix D.1.

### 3.2 THE BENCHMARK

Based on ISG, we develop the first benchmark, termed ISG-BENCH, for interleaved text-and-image generation to assess multimodal understanding and generation capabilities across various tasks. As shown in Table 2, ISG-BENCH consists of a categorically balanced dataset of 1,150 samples, covering 21 subtasks across 8 daily interleaved generative scenarios. Each sample includes detailed instructions and structural requirements, such as “Generate four images and provide a brief text description after your generated image,” to evaluate both instruction-following capability and interleaved generation ability. Every query is designed to be 1) vision-language dependent, meaning it cannot be addressed using information from a single modality alone, and 2) paired with a carefully collected golden reference answer. All samples are collected and manually selected by cross-validation and BertScore (Zhang et al., 2019) for similarity filtering, as detailed in Appendix B.3.

**Data collection and quality control.** Our benchmark collections involve three main stages. First, we review existing datasets according to the task definition and retrieve high-quality, non-overlapping vision metadata to serve as the visual information in both the query and the golden answer, with some data collected by ourselves (e.g., “Multi-View Scene Generation”). We then curate natural language queries that reference the images for automatic evaluation. Each query specifies the required structure of the output. MLLMs are employed to generate textual answers for each task, which are subsequently reviewed by human annotators to ensure accuracy. Due to concerns about data contamination in foundation models (Balloccu et al., 2024; Xu et al., 2024), annotators are instructed to create free-form queries and develop both the query and the corresponding golden answer from scratch. Finally, we obtain a diverse and high-quality interleaved multimodal benchmark with query-answer pairs sourced from various origins. To ensure the quality of our samples, we conduct cross-validation among different annotators for format consistency and typo checking. Detailed definitions, the collection pipeline, and additional examples are provided in Appendix B.

**Modality Specific Assessment.** We categorize each task within our ISG-BENCH into three modes (i.e., Image, Language, and Both) for their primary modality contributing to the output via decision tree (Figure 8). For example, the “HowTo” task requires both vision and language content to solve the problem, and “Art Style Transfer” requires mainly on vision generation; while “VQA with Image Generation” primarily relies on textual output, where the quality and accuracy of answers is mainly attributed to the language component, with generated images serving as complementary information.

## 4 EXPERIMENTS AND ANALYSIS

We first validate ISG against human annotations (Section 4.1), demonstrating its alignment with human judgments. Our subsequent evaluation of interleaved generation (Section 4.2) reveals the limitations of unified models and moderate success of compositional approaches, underscoring current challenges in instruction-following for interleaved generation.

### 4.1 EVALUATING ISG-BENCH

**Experiment Setups.** We leverage one of the most popular MLLMs, GPT-4o (OpenAI, 2024), as question generation and VQA module of our ISG. We conduct experiments to verify the performance of ISG in each step with varying sample sizes and metric settings, as shown in Table 3.

**All results are compared with human-annotated ground truth with cross-validation.** Figure 4 visualize the distributions of VQA instances in our ISG-BENCH. For the question generation module, we classify a result as correct if it matches the subject and object, with a BertScore (Zhang et al., 2019) higher than 0.8 compared to the ground truth. Our experiments include two settings for VQA module in ISG with an “Analyze-then-Judge” COT framework (Wei et al., 2022): “1-10” scoring (Lin et al., 2024) and direct “Yes-or-No” (Cho et al., 2023). We also conduct ablation experiments on vision inputs or caption images as textual information and few-shot prompting to probe the best setting of ISG. For MLLM-as-a-Judge, we follow previous studies to use human agreement as the evaluation metric (Chen et al., 2024a;e).

**ISG demonstrates commendable performance across all tasks in each module.** As illustrated in Table 3, each module of ISG aligns well with human annotation. For structural, ISG exhibits consistent excellence across all tasks, indicating robust potential for capturing structural requirements in interleaved generation instructions. In both Q-Gen and VQA modules, ISG successfully extracts fine-grained requirements with high fidelity to ground truth. For the VQA module, the scoring approach consistently outperforms the “Yes-or-No” method, suggesting that more nuanced judgments align better with human evaluations, particularly in ambiguous cases as highlighted in Appendix D.1.1. Vision-guided tasks consistently underperform compared to other tasks, with a noticeable decline in both Q-Gen and VQA modules, underscoring the challenges in automatically evaluating fine-grained aspects of interleaved text-and-

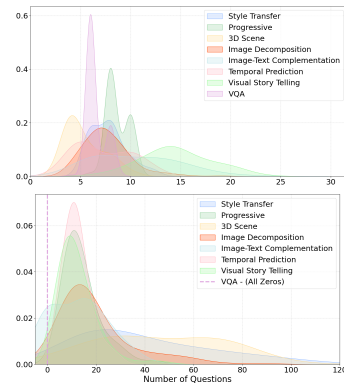


Figure 4: Distributions of VQA instances in Block-level (Upper) and Image-level (Lower).

Table 3: When evaluated against human annotations, ISG showed strong alignment with human judgments across all levels. All results for Pearson Similarity have a P-value lower than 0.005. We **bold** better results in two comparative experiments. **Q-Gen**: Question generation module; **Acc+BS**: Accuracy and BertScore for block and question matching respectively.

Eval Level	Eval Task	Metric	Size	Avg.	Style	Prog.	3D	Dec.	I-T C..	Temp.	VST	A VQA
Structural	Direct Match	Accuracy	1,150	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
Block	Q-Gen	Acc+BS	1,150	0.967	0.955	0.988	0.890	0.970	0.993	0.980	0.980	0.980
	VQA Score VQA YesNo	Pearson	1,092	<b>0.718</b> 0.446	<b>0.482</b> 0.169	<b>0.529</b> 0.386	<b>0.581</b> 0.528	<b>0.850</b> 0.382	<b>0.778</b> 0.555	<b>0.816</b> 0.388	<b>0.873</b> 0.634	<b>0.835</b> 0.529
Image	Q-Gen	Acc+BS	1,150	0.811	0.949	0.761	0.553	0.925	0.884	0.817	0.792	-
	VQA YesNo	Accuracy	4,871	0.907	0.851	0.873	0.863	0.937	0.968	0.921	0.934	-
Holistic	w. GT	Agreement	260	<b>0.730</b>	<b>0.720</b>	<b>0.620</b>	<b>0.660</b>	<b>0.600</b>	<b>0.950</b>	<b>0.750</b>	<b>0.640</b>	<b>0.900</b>
	w.o. GT			0.537	0.600	0.460	0.450	0.400	0.900	0.600	0.370	0.800

Table 4: Ablation study on vision input and few-shot help tuple construction in both block-level and image-level. For language-dominate tasks, we do not require accurate image generation.

Eval Level	Vision	Few-Shot	Avg.	Style	Prog.	3D	Dec.	I-T C.	Temp.	VST	A VQA
Block	✗	✗	0.631	0.635	0.801	0.495	0.778	0.725	0.621	0.787	0.207
	✗	✓	<b>0.967</b>	<b>0.955</b>	<b>0.988</b>	<b>0.890</b>	<b>0.970</b>	<b>0.993</b>	<b>0.980</b>	<b>0.980</b>	<b>0.980</b>
	✓	✗	0.671	0.662	0.858	0.575	0.810	0.739	0.649	0.848	0.224
	✓	✓	0.942	0.934	0.959	0.822	0.969	0.981	0.970	0.949	0.954
Image	✗	✗	0.688	0.873	0.751	0.497	0.908	0.575	0.526	0.684	-
	✗	✓	0.804	0.902	<b>0.796</b>	0.518	0.905	0.869	<b>0.859</b>	0.780	-
	✓	✗	0.711	0.943	0.755	0.535	0.951	0.586	0.539	0.671	-
	✓	✓	<b>0.811</b>	<b>0.949</b>	0.761	<b>0.553</b>	<b>0.925</b>	<b>0.884</b>	0.817	<b>0.792</b>	-

image generation. In holistic evaluation, leveraging a golden answer significantly outperforms the zero-shot judging setting of MLLMs, especially in vision-guided tasks, yielding an average of 20% improvement in human agreement.

**Ablation Study on Vision Input and Few-shot Prompting.** We evaluate our ISG under two conditions: vision input and few-shot examples, for a more comprehensive study. As shown in Table 4, multimodal input varies in block-level and image-level question generation, with a slight enhancement in image-level question generation. In addition, few-shot in-context learning provides dramatic enhancement on both tasks, improving performance by more than 30% in block-level and 10% in image-level tasks, especially in vision-language guided tasks by limiting requirements for the predicted generative content. For language-guided tasks, few-shot learning brings a 70% enhancement in block-level performance, further demonstrating the accurate evaluation framework establishment for this type of creative generation task.

#### 4.2 BENCHMARKING INTERLEAVED TEXT-AND-IMAGE GENERATION

**Experiment Setups.** We evaluate 10 frameworks capable of generating interleaved text-and-image content, four recently released unified models, Show-o<sup>1</sup> (Xie et al., 2024), Anole (Chern et al., 2024), Minigpt-5 (Li et al., 2024b), CoMM-Minigpt-5 (Chen et al., 2024d), SEED-LLaMA (Li et al., 2023b) as well as two compositional settings, using Gemini-1.5-Pro (GeminiTeam, 2023) and Claude-3.5-Sonnet (Anthropic, 2024) as a multimodal preceptor<sup>2</sup> and SD3 (Esser et al., 2024) as its generator, with SD2.1 (Rombach et al., 2022) for ablation study. For our ISG-AGENT, we use GPT-4o for planning and verification agent, and use Claude-3.5-Sonnet for tool selector, with SD3 as image generator and multiple tools (UltraEdit(Zhao et al., 2024), DynamiCrafter(Xing et al., 2023), SV3D (Voleti et al., 2024), DreamMover (Shen et al., 2024)). As for ISG, we follow the best-performed setting in Section 4.1 for a completely automatic evaluating setting. Refer to Appendix D for detailed experiment setups.

**Unified models underperform in accurate interleaved generation.** As illustrated in Table 5, all unified models exhibit significant deficiencies in following our instructions to generate interleaved

<sup>1</sup>Since Show-o’s interleaved generation scripts are unavailable and their current checkpoint lacks multiple-image generation capability, we generate the whole answer via multi-turn dialogues.

<sup>2</sup>Given that AzureOpenAI filters most of our prompt when prompting them to generate caption for image generation, we do not evaluate GPT-4o (OpenAI, 2024) here.

Table 5: Evaluating interleaved text-and-image generation with ISG for structural and holistic level. 🤖 depicts a unified model. 🧩 depicts compositional framework.

	Model	Avg.	Style	Prog.	3D	Dec.	I-T C.	Temp.	VST	VQA
Structural	Show-o	0.295	0.320	0.253	0.380	0.000	0.195	0.700	0.080	0.433
	Anole	0.000	0.000	0.000	0.000	0.010	0.000	0.000	0.000	0.000
	Minigt-5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	CoMM-Minigt-5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Seed-Llama-14b	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Claude	0.323	0.000	0.000	0.030	0.760	0.313	0.500	0.000	<b>0.980</b>
	Gemini	0.385	0.005	0.093	0.000	<b>0.959</b>	0.453	0.549	0.107	0.913
	ISG-AGENT	<b>0.871</b>	<b>0.944</b>	<b>0.967</b>	<b>0.788</b>	0.902	<b>0.800</b>	<b>1.000</b>	<b>0.987</b>	0.577
Holistic	Show-o	2.329	2.112	2.407	1.434	2.868	2.056	2.578	3.315	1.863
	Anole	2.810	2.931	2.764	1.850	1.485	3.209	2.575	2.968	4.695
	Minigt-5	2.787	2.161	3.147	1.793	2.538	2.722	2.732	2.909	4.292
	CoMM-Minigt-5	2.961	2.602	3.085	2.237	3.090	2.523	2.720	2.874	4.557
	Seed-Llama-14b	2.388	1.837	3.298	1.518	3.689	1.944	1.778	2.842	2.200
	Claude & SD3	6.254	5.179	6.435	3.874	7.306	<b>7.912</b>	5.290	6.168	7.864
	Claude & SD2.1	5.803	4.908	4.332	3.818	6.932	7.566	<b>5.819</b>	5.679	7.370
	Gemini & SD3	5.827	4.887	<b>6.594</b>	2.677	7.264	6.370	5.256	5.681	<b>7.889</b>
	Gemini & SD2.1	5.708	5.025	6.205	2.936	7.024	6.549	4.570	5.526	7.828
	ISG-AGENT	<b>6.262</b>	<b>5.873</b>	6.459	<b>4.887</b>	<b>7.582</b>	6.932	4.540	<b>7.030</b>	6.795
Human	9.265	9.215	9.509	9.352	8.972	9.528	9.484	9.299	8.764	

Table 6: Evaluating interleaved generation with ISG for block and image level evaluation. We do not report image-level evaluation for language-dominant task “VQA”. 🤖 depicts a unified model. 🧩 depicts compositional framework.

	Model	Avg.	Style	Prog.	3D	Dec.	I-T C.	Temp.	VST	VQA
Block	Show-o	1.962	1.719	2.087	1.351	1.000	1.632	4.421	1.233	2.252
	Claude & SD3	2.962	1.000	1.000	1.048	4.904	3.380	3.357	1.000	<b>8.011</b>
	Claude & SD2.1	2.870	1.000	1.000	1.065	4.513	3.356	3.013	1.000	<b>8.011</b>
	Gemini & SD3	3.081	1.018	1.500	1.000	<b>5.077</b>	4.204	3.533	1.434	6.885
	Gemini & SD2.1	2.982	1.018	1.400	1.000	4.696	4.069	3.429	1.334	6.908
	ISG-AGENT	<b>5.515</b>	<b>5.391</b>	<b>6.181</b>	<b>6.081</b>	4.243	<b>6.408</b>	<b>6.816</b>	<b>5.678</b>	3.321
Human	7.611	7.204	6.363	7.213	7.517	8.517	8.453	7.788	7.832	
Image	Show-o	0.078	0.056	0.138	0.020	0.000	0.026	0.265	0.042	-
	Claude & SD3	0.116	0.000	0.000	0.027	0.484	0.000	0.302	0.000	-
	Claude & SD2.1	0.104	0.000	0.000	0.014	0.432	0.000	0.281	0.000	-
	Gemini & SD3	0.113	0.001	0.071	0.000	0.308	0.086	0.301	0.023	-
	Gemini & SD2.1	0.150	0.001	0.060	0.000	0.576	0.092	0.276	0.045	-
	ISG-AGENT	<b>0.574</b>	<b>0.538</b>	<b>0.752</b>	<b>0.359</b>	<b>0.617</b>	<b>0.368</b>	<b>0.670</b>	<b>0.713</b>	-
Human	0.813	0.781	0.829	0.870	0.677	0.908	0.896	0.734	-	

text-and-image content. Many models produced only one to three images, while some failed to generate any images at all. Consequently, these models could not be subjected to block-level and image-level evaluation protocols. In terms of holistic evaluation, the models demonstrated superior capabilities in language-dominant tasks, while notably underperforming in vision-dominant tasks. This disparity further proves the hypothesis that current training datasets for unified models lack sufficient vision-dominant instruction tuning samples, such as those for “*Style Transfer*” and “*Image Decomposition*”. Notably, Show-o, as one of the first unified autoregressive models, demonstrates strong structural accuracy but suffers from hallucinations — generating images based on system prompts rather than user instructions, as illustrated in Figure 39. Similarly, Anole achieves SOTA performance among unified models, highlighting the promise of its architectural design.

**Vision-dominated tasks challenge all models.** Given that these compositional frameworks perceive images and generate images separately, i.e., not end to end, meaning that they naturally cannot



Table 7: Ablation study for ISG-AGENT in refinement module and advanced tools.

	Ablation		Avg.	🖼️				🖼️A			A VQA
	Refine	SOTA Tools		Style	Prog.	3D	Dec.	I-T C.	Temp.	VST	
Stru.	✗	✓	<b>0.883</b>	<b>0.945</b>	0.967	0.780	<b>0.910</b>	<b>0.899</b>	<b>1.000</b>	<b>0.987</b>	0.573
	✓	✓	0.876	0.944	0.967	<b>0.788</b>	0.902	0.840	<b>1.000</b>	<b>0.987</b>	<b>0.577</b>
Block	✓	✗	5.155	5.013	5.615	<b>6.833</b>	3.229	6.031	5.784	3.541	<b>5.198</b>
	✗	✓	5.366	5.206	6.035	6.031	4.248	6.298	6.771	5.283	3.055
	✓	✓	<b>5.515</b>	<b>5.391</b>	<b>6.181</b>	6.081	<b>4.243</b>	<b>6.408</b>	<b>6.816</b>	<b>5.678</b>	3.321
Image	✓	✗	0.554	0.585	0.732	0.518	0.504	0.318	0.614	0.605	-
	✗	✓	<b>0.598</b>	<b>0.540</b>	<b>0.752</b>	<b>0.530</b>	<b>0.620</b>	0.366	0.665	<b>0.714</b>	-
	✓	✓	0.574	0.538	<b>0.752</b>	0.359	0.617	<b>0.368</b>	<b>0.670</b>	0.713	-
Holistic	✓	✗	5.433	5.477	6.024	4.544	6.630	5.971	3.980	5.585	5.256
	✗	✓	5.974	5.418	5.489	4.682	<b>7.630</b>	6.736	4.502	6.631	6.704
	✓	✓	<b>6.262</b>	<b>5.873</b>	<b>6.459</b>	<b>4.887</b>	7.582	<b>6.932</b>	<b>4.540</b>	<b>7.030</b>	<b>6.795</b>

perform these tasks well such as accurate image editing due to their inherent structure. On the other hand, although these unified models have the potential to understand and generate images in an end-to-end manner and announce their capability in vision generative tasks such as “*Image Generation*” or “*Image Editing*”, they fall short in understanding multimodal queries to generate interleaved content with multiple images. As shown in Figure 6, the best unified model Anole fails to understand the output format and deviates from the context of input images, demonstrating their deficiency in generating images in vision in-context learning (Sun et al., 2024b).

**MLLM-as-a-Judge cannot evaluate fine-grained accurate generation.** The inconsistency between holistic evaluation results and those at three fine-grained levels, as illustrated in Tables 5 and 6, reveals a notable limitation in MLLM-as-a-Judge to comprehensively assess responses, even when provided with both the user’s instruction and correct golden answer. Specifically, Judge MLLM struggles to evaluate responses according to fine-grained criteria, such as output structure (including image count) and the detailed text-image relationships stipulated in the prompt. Furthermore, our analysis of the results presented in Table 7 uncovers an inherent bias within MLLM-as-a-Judge, namely “*image-quality bias*”, where higher scores are consistently awarded to responses featuring higher-quality image content, despite these responses potentially violating the user’s instructional requirements and judging guidelines. This bias demonstrates that MLLM-as-a-Judge, even provided with a golden answer, still cannot properly perform accurate assessments on interleaved responses that adhere to specified requirements.

## 5 ISG-AGENT: DESIGNING A BASELINE AGENT

Although unified generation models (Chern et al., 2024; Zhou et al., 2024; Team, 2024) show potential in multimodal interleaved generation, generating interleaved text-and-image content remains challenging, even after fine-tuning. Inspired by previous compositional frameworks for vision generative tasks (Gupta & Kembhavi, 2023; Surís et al., 2023; Ma et al., 2024), we propose ISG-AGENT, a baseline agent for future work to use for the benchmark.

### 5.1 AGENT SETUP

Figure 5 provides an overview of ISG-AGENT, which consists of three components—planning, execution, and refinement—that work collaboratively for interleaved text-and-image generation.

- **Planning.** This component acts as the interface for interpreting the user’s multimodal query and generating a corresponding plan for tool usage in JSON format. The plan outlines sequential steps that primarily involve tool invocation. By leveraging an MLLM as the backbone, it ensures the creation of an accurate interleaved generation plan that strictly adheres to the user’s instructions, including specifications for fine-grained text-image block requirements. Each step includes clear tool execution functions and natural language descriptions for subsequent tool usage.
- **Tool-usage.** This component is responsible for executing tools with detailed logs (Schick et al., 2024). At each step, it selects the most appropriate tools from the tool library and provides refined, descriptive text and images to the designated tool, such as a Vision-Language Model (VLM) for

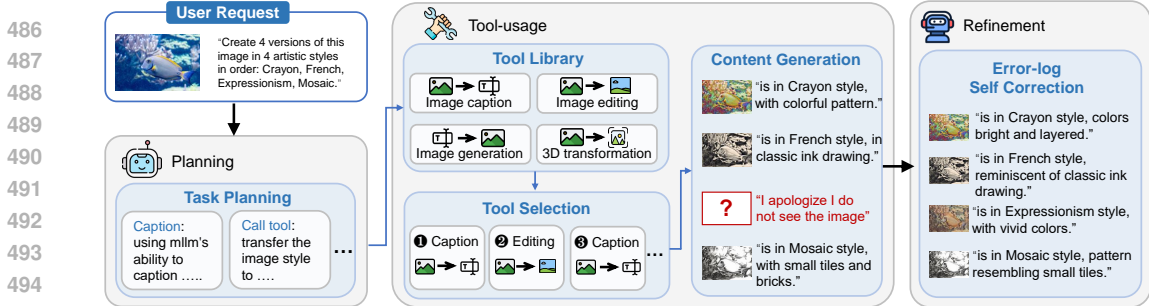


Figure 5: An overview of ISG-AGENT.

captioning and diffusion models for image generation. To avoid potential deviations during tool utilization, the agent is designed to generate descriptions that closely align with the instructions specifically for tool-calling.

- **Refinement.** This component is responsible for reviewing and enhancing the quality of the generated content from the previous step by analyzing error messages or improper generation and addressing them by reconstructing the erroneous steps with more detailed and precise execution instructions until the issues are resolved (Wu et al., 2024a). Additionally, this agent refines the text by transforming pronouns, adding conjunctions, and removing repetitive descriptions to improve consistency and textual quality, thus creating more coherent and text-image-aligned content instead of several discrete fragments.

This “Plan-Execute-Refine” pipeline for interleaved text-and-image generation ensures that the final output closely adheres to the user’s instructions while autonomously handling a variety of tasks effectively. We provide two examples of ISG-AGENT’s performance in Figures 37 and 38. For further technical details, please refer to Appendix D.2.

## 5.2 EXPERIMENT RESULT

**ISG-AGENT outperforms in vision-dominated tasks while falling short in language-guided tasks.** As shown in Table 6, ISG-AGENT strictly follows users’ requirements to generate interleaved content, achieving comparative results to human’s golden answer in various tasks in both block-level and image-level, especially in vision-dominated tasks like “Style Transfer” and “3D Scene”. The SOTA results in “Progressive Transformation” also demonstrate good coherence of the image content, even accommodate to human-collected answers. Although LLM+Diffusion frameworks fall short in accurate instruction-following, they achieve SOTA results in holistic evaluation in some language-dominate tasks, demonstrating their high generation quality of textual information.

**Enhanced components bring improvement to general response quality.** The comparative analysis between two image generation models (Table 6) and ablation study on tools (Table 7) consistently demonstrates superior performance across various task levels when employing enhanced components, thereby underscoring the importance of advanced tools in producing more accurate and high-fidelity content. Furthermore, the incorporation of a refinement module significantly contributes to improved text-image alignment, substantially enhancing both block-level and holistic performance, which highlights the potential for optimizing individual components to achieve precise interleaved generation within a compositional framework.

## 6 CONCLUSION

This paper advances the field of evaluating interleaved text-and-image generation by introducing the first automatic multi-granular evaluation framework INTERLEAVED SCENE GRAPH and proposing ISG-BENCH with 1,150 multimodal queries paired with high-quality golden answers over 8 diverse tasks, as well as an agent framework ISG-AGENT for exploring this task. Our comprehensive study, which includes assessments of ten cutting-edge multimodal interleaved generative frameworks, offers crucial insights into current performance and establishes a solid foundation for future research in Appendix A. We emphasize the importance of continued efforts in developing better interleaved generative models and better evaluation frameworks.

## REFERENCES

- 540  
541  
542 Jie An, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Lijuan Wang, and Jiebo  
543 Luo. Openleaf: Open-domain interleaved image-text generation and evaluation. *arXiv preprint*  
544 *arXiv:2310.07749*, 2023.
- 545 Anthropic. Claude 3.5: A sonnet. [https://www.anthropic.com/news/](https://www.anthropic.com/news/claude-3-5-sonnet)  
546 [claude-3-5-sonnet](https://www.anthropic.com/news/claude-3-5-sonnet), 2024. Accessed: 2024-09-04.
- 547 Simone Balloccu, Patrícia Schmidová, Mateusz Lango, and Ondřej Dušek. Leak, cheat, re-  
548 peat: Data contamination and evaluation malpractices in closed-source llms. *arXiv preprint*  
549 *arXiv:2402.03927*, 2024.
- 550  
551 James Betker, Gabriel Goh, Li Jing, Tim Brooks, Jianfeng Wang, Linjie Li, Long Ouyang, Juntang  
552 Zhuang, Joyce Lee, Yufei Guo, et al. Improving image generation with better captions. *Computer*  
553 *Science*. <https://cdn.openai.com/papers/dall-e-3.pdf>, 2(3):8, 2023.
- 554 Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik  
555 Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling  
556 latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023.
- 557 Vladimir Bychkovsky, Sylvain Paris, Eric Chan, and Frédo Durand. Learning photographic global  
558 tonal adjustment with a database of input/output image pairs. In *CVPR 2011*, pp. 97–104. IEEE,  
559 2011.
- 560  
561 Dongping Chen, Ruoxi Chen, Shilin Zhang, Yinuo Liu, Yaochen Wang, Huichi Zhou, Qihui Zhang,  
562 Pan Zhou, Yao Wan, and Lichao Sun. Mllm-as-a-judge: Assessing multimodal llm-as-a-judge  
563 with vision-language benchmark. *arXiv preprint arXiv:2402.04788*, 2024a.
- 564 Dongping Chen, Yue Huang, Siyuan Wu, Jingyu Tang, Liuyi Chen, Yilin Bai, Zhigang He, Chenlong  
565 Wang, Huichi Zhou, Yiqiang Li, et al. Gui-world: A dataset for gui-oriented multimodal llm-  
566 based agents. *arXiv preprint arXiv:2406.10819*, 2024b.
- 567 Tsai-Shien Chen, Aliaksandr Siarohin, Willi Menapace, Ekaterina Deyneka, Hsiang-wei Chao,  
568 Byung Eun Jeon, Yuwei Fang, Hsin-Ying Lee, Jian Ren, Ming-Hsuan Yang, et al. Panda-70m:  
569 Captioning 70m videos with multiple cross-modality teachers. In *Proceedings of the IEEE/CVF*  
570 *Conference on Computer Vision and Pattern Recognition*, pp. 13320–13331, 2024c.
- 571  
572 Wei Chen, Lin Li, Yongqi Yang, Bin Wen, Fan Yang, Tingting Gao, Yu Wu, and Long Chen. Comm:  
573 A coherent interleaved image-text dataset for multimodal understanding and generation. *arXiv*  
574 *preprint arXiv:2406.10462*, 2024d.
- 575 Zhaorun Chen, Yichao Du, Zichen Wen, Yiyang Zhou, Chenhang Cui, Zhenzhen Weng, Haoqin  
576 Tu, Chaoqi Wang, Zhengwei Tong, Qinglan Huang, et al. Mj-bench: Is your multimodal reward  
577 model really a good judge for text-to-image generation? *arXiv preprint arXiv:2407.04842*, 2024e.
- 578 Ethan Chern, Jiadi Su, Yan Ma, and Pengfei Liu. Anole: An open, autoregressive, native large mul-  
579 timodal models for interleaved image-text generation. *arXiv preprint arXiv:2407.06135*, 2024.
- 580  
581 Jaemin Cho, Yushi Hu, Roopal Garg, Peter Anderson, Ranjay Krishna, Jason Baldridge, Mohit  
582 Bansal, Jordi Pont-Tuset, and Su Wang. Davidsonian scene graph: Improving reliability in fine-  
583 grained evaluation for text-image generation. *arXiv preprint arXiv:2310.18235*, 2023.
- 584 Jaemin Cho, Abhay Zala, and Mohit Bansal. Visual programming for step-by-step text-to-image  
585 generation and evaluation. *Advances in Neural Information Processing Systems*, 36, 2024.
- 586  
587 Jasmine Collins, Shubham Goel, Kenan Deng, Achleshwar Luthra, Leon Xu, Erhan Gundogdu,  
588 Xi Zhang, Tomas F Yago Vicente, Thomas Dideriksen, Himanshu Arora, Matthieu Guillaumin,  
589 and Jitendra Malik. Abo: Dataset and benchmarks for real-world 3d object understanding. *CVPR*,  
590 2022.
- 591 Daniel Deutsch, Tania Bedrax-Weiss, and Dan Roth. Towards question-answering as an automatic  
592 metric for evaluating the content quality of a summary. *Transactions of the Association for Com-*  
593 *putational Linguistics*, 9:774–789, 2020. URL [https://api.semanticscholar.org/](https://api.semanticscholar.org/CorpusID:222090341)  
[CorpusID:222090341](https://api.semanticscholar.org/CorpusID:222090341).

- 594 Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu,  
595 and Zhifang Sui. A survey on in-context learning. *arXiv preprint arXiv:2301.00234*, 2022.  
596
- 597 Esin Durmus, He He, and Mona T. Diab. Feqa: A question answering evaluation framework  
598 for faithfulness assessment in abstractive summarization. *ArXiv*, abs/2005.03754, 2020. URL  
599 <https://api.semanticscholar.org/CorpusID:218571335>.
- 600 Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam  
601 Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for  
602 high-resolution image synthesis. In *Forty-first International Conference on Machine Learning*,  
603 2024.  
604
- 605 Matan Eyal, Tal Baumel, and Michael Elhadad. Question answering as an automatic evaluation  
606 metric for news article summarization. In *North American Chapter of the Association for Com-  
607 putational Linguistics*, 2019. URL [https://api.semanticscholar.org/CorpusID:  
608 173990261](https://api.semanticscholar.org/CorpusID:173990261).
- 609 Flux. Black forest labs. <https://blackforestlabs.ai/>, 2024.  
610
- 611 GeminiTeam. Gemini: A family of highly capable multimodal models, 2023.  
612
- 613 Dhruva Ghosh, Hannaneh Hajishirzi, and Ludwig Schmidt. Geneval: An object-focused framework  
614 for evaluating text-to-image alignment. *Advances in Neural Information Processing Systems*, 36,  
615 2024.
- 616 Carlos Gómez-Rodríguez and Paul Williams. A confederacy of models: A comprehensive evaluation  
617 of llms on creative writing. *arXiv preprint arXiv:2310.08433*, 2023.  
618
- 619 Tanmay Gupta and Aniruddha Kembhavi. Visual programming: Compositional visual reasoning  
620 without training. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern  
621 Recognition*, pp. 14953–14962, 2023.
- 622 Jack Hessel, Ari Holtzman, Maxwell Forbes, Ronan Le Bras, and Yejin Choi. Clipscore: A  
623 reference-free evaluation metric for image captioning. *arXiv preprint arXiv:2104.08718*, 2021.  
624
- 625 Yushi Hu, Benlin Liu, Jungo Kasai, Yizhong Wang, Mari Ostendorf, Ranjay Krishna, and Noah A  
626 Smith. Tifa: Accurate and interpretable text-to-image faithfulness evaluation with question an-  
627 swering. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp.  
628 20406–20417, 2023.
- 629 Kaiyi Huang, Kaiyue Sun, Enze Xie, Zhenguo Li, and Xihui Liu. T2i-compbench: A compre-  
630 hensive benchmark for open-world compositional text-to-image generation. *Advances in Neural  
631 Information Processing Systems*, 36:78723–78747, 2023.  
632
- 633 Ting-Hao Huang, Francis Ferraro, Nasrin Mostafazadeh, Ishan Misra, Aishwarya Agrawal, Jacob  
634 Devlin, Ross Girshick, Xiaodong He, Pushmeet Kohli, Dhruv Batra, et al. Visual storytelling. In  
635 *Proceedings of the 2016 conference of the North American chapter of the association for compu-  
636 tational linguistics: Human language technologies*, pp. 1233–1239, 2016.
- 637 Yue Huang and Lichao Sun. Harnessing the power of chatgpt in fake news: An in-depth exploration  
638 in generation, detection and explanation. *arXiv preprint arXiv:2310.05046*, 2023.  
639
- 640 Yue Huang, Lichao Sun, Haoran Wang, Siyuan Wu, Qihui Zhang, Yuan Li, Chujie Gao, Yixin  
641 Huang, Wenhan Lyu, Yixuan Zhang, et al. Position: Trustllm: Trustworthiness in large language  
642 models. In *International Conference on Machine Learning*, pp. 20166–20270. PMLR, 2024.
- 643 Justin Johnson, Agrim Gupta, and Li Fei-Fei. Image generation from scene graphs. In *Proceedings  
644 of the IEEE conference on computer vision and pattern recognition*, pp. 1219–1228, 2018.  
645
- 646 Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete  
647 Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceed-  
ings of the IEEE/CVF International Conference on Computer Vision*, pp. 4015–4026, 2023.

- 648 Jing Yu Koh, Daniel Fried, and Russ R Salakhutdinov. Generating images with multimodal language  
649 models. *Advances in Neural Information Processing Systems*, 36, 2024.
- 650
- 651 Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie  
652 Chen, Yannis Kalantidis, Li-Jia Li, David A Shamma, et al. Visual genome: Connecting lan-  
653 guage and vision using crowdsourced dense image annotations. *International journal of computer  
654 vision*, 123:32–73, 2017.
- 655 Pierre-Yves Laffont, Zhile Ren, Xiaofeng Tao, Chao Qian, and James Hays. Transient attributes for  
656 high-level understanding and editing of outdoor scenes. *ACM Transactions on graphics (TOG)*,  
657 33(4):1–11, 2014.
- 658
- 659 Bo Li, Peiyuan Zhang, Jingkang Yang, Yuanhan Zhang, Fanyi Pu, and Ziwei Liu. Otterhd: A  
660 high-resolution multi-modality model. *arXiv preprint arXiv:2311.04219*, 2023a.
- 661
- 662 Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei  
663 Li, Ziwei Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer. *arXiv preprint  
664 arXiv:2408.03326*, 2024a.
- 665 Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Bench-  
666 marking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*,  
667 2023b.
- 668
- 669 Jizhizi Li, Jing Zhang, Stephen J Maybank, and Dacheng Tao. Bridging composite and real: to-  
670 wards end-to-end deep image matting. *International Journal of Computer Vision*, 130(2):246–  
671 266, 2022.
- 672 Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image  
673 pre-training with frozen image encoders and large language models. In *International conference  
674 on machine learning*, pp. 19730–19742. PMLR, 2023c.
- 675
- 676 Yanwei Li, Yuechen Zhang, Chengyao Wang, Zhisheng Zhong, Yixin Chen, Ruihang Chu, Shaoteng  
677 Liu, and Jiaya Jia. Mini-gemini: Mining the potential of multi-modality vision language models.  
678 *arXiv preprint arXiv:2403.18814*, 2024b.
- 679 Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr  
680 Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *Computer  
681 Vision—ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6-12, 2014,  
682 Proceedings, Part V 13*, pp. 740–755. Springer, 2014.
- 683
- 684 Zhiqiu Lin, Deepak Pathak, Baiqi Li, Jiayao Li, Xide Xia, Graham Neubig, Pengchuan Zhang,  
685 and Deva Ramanan. Evaluating text-to-visual generation with image-to-text generation. *arXiv  
686 preprint arXiv:2404.01291*, 2024.
- 687
- 688 Chang Liu, Haoning Wu, Yujie Zhong, Xiaoyun Zhang, Yanfeng Wang, and Weidi Xie. Intelli-  
689 gent grimm-open-ended visual storytelling via latent diffusion models. In *Proceedings of the  
690 IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 6190–6200, 2024a.
- 691
- 692 Danyang Liu, Mirella Lapata, and Frank Keller. Generating visual stories with grounded and coref-  
693 erent characters, 2024b. URL <https://arxiv.org/abs/2409.13555>.
- 694
- 695 Fuxiao Liu, Tianrui Guan, Zongxia Li, Lichang Chen, Yaser Yacoob, Dinesh Manocha, and Tianyi  
696 Zhou. Hallusionbench: You see what you think? or you think what you see? an image-context  
697 reasoning benchmark challenging for gpt-4v (ision), llava-1.5, and other multi-modality models.  
698 *arXiv preprint arXiv:2310.14566*, 2023.
- 699
- 700 Hao Liu, Wilson Yan, Matei Zaharia, and Pieter Abbeel. World model on million-length video and  
701 language with ringattention. *arXiv preprint arXiv:2402.08268*, 2024c.
- 702
- 703 Minqian Liu, Zhiyang Xu, Zihao Lin, Trevor Ashby, Joy Rimchala, Jiaxin Zhang, and Lifu Huang.  
704 Holistic evaluation for interleaved text-and-image generation. *arXiv preprint arXiv:2406.14643*,  
705 2024d.

- 702 Yujie Lu, Xianjun Yang, Xiujun Li, Xin Eric Wang, and William Yang Wang. Llmscore: Unveiling  
703 the power of large language models in text-to-image synthesis evaluation. *Advances in Neural*  
704 *Information Processing Systems*, 36, 2024.
- 705 Zixian Ma, Weikai Huang, Jieyu Zhang, Tanmay Gupta, and Ranjay Krishna. m&m’s: A benchmark  
706 to evaluate tool-use for multi-step multi-modal tasks. In *Synthetic Data for Computer Vision*  
707 *Workshop@ CVPR 2024*, 2024.
- 708 Adyasha Maharana, Darryl Hannan, and Mohit Bansal. Storydall-e: Adapting pretrained text-to-  
709 image transformers for story continuation. In *European Conference on Computer Vision*, pp.  
710 70–87. Springer, 2022.
- 711 Antoine Miech, Dimitri Zhukov, Jean-Baptiste Alayrac, Makarand Tapaswi, Ivan Laptev, and Josef  
712 Sivic. Howto100m: Learning a text-video embedding by watching hundred million narrated  
713 video clips. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp.  
714 2630–2640, 2019.
- 715 Shashi Narayan, Shay B. Cohen, and Mirella Lapata. Ranking sentences for extractive summa-  
716 rization with reinforcement learning. In *North American Chapter of the Association for Com-*  
717 *putational Linguistics*, 2018. URL [https://api.semanticscholar.org/CorpusID:](https://api.semanticscholar.org/CorpusID:3510042)  
718 [3510042](https://api.semanticscholar.org/CorpusID:3510042).
- 719 OpenAI. Openai models - gpt-4-vision. [https://openai.com/research/](https://openai.com/research/gpt-4v-system-card)  
720 [gpt-4v-system-card](https://openai.com/research/gpt-4v-system-card), 2023.
- 721 OpenAI. Hello gpt-4o, May 2024. URL <https://openai.com/index/hello-gpt-4o/>.  
722 Accessed: 2024-06-06.
- 723 Karl Ricanek and Tamirat Tesafaye. Morph: A longitudinal image database of normal adult age-  
724 progression. In *7th international conference on automatic face and gesture recognition (FGRO6)*,  
725 pp. 341–345. IEEE, 2006.
- 726 Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-  
727 resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF confer-*  
728 *ence on computer vision and pattern recognition*, pp. 10684–10695, 2022.
- 729 Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro,  
730 Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can  
731 teach themselves to use tools. *Advances in Neural Information Processing Systems*, 36, 2024.
- 732 Liao Shen, Tianqi Liu, Huiqiang Sun, Xinyi Ye, Baopu Li, Jianming Zhang, and Zhiguo Cao.  
733 Dreammover: Leveraging the prior of diffusion models for image interpolation with large mo-  
734 tion. *arXiv preprint arXiv:2409.09605*, 2024.
- 735 Tomáš Souček, Jean-Baptiste Alayrac, Antoine Miech, Ivan Laptev, and Josef Sivic. Look for the  
736 change: Learning object states and state-modifying actions from untrimmed web videos. In *Pro-*  
737 *ceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 13956–  
738 13966, 2022.
- 739 Peize Sun, Yi Jiang, Shoufa Chen, Shilong Zhang, Bingyue Peng, Ping Luo, and Zehuan Yuan.  
740 Autoregressive model beats diffusion: Llama for scalable image generation. *arXiv preprint*  
741 *arXiv:2406.06525*, 2024a.
- 742 Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiying Yu, Yueze Wang, Yongming Rao,  
743 Jingjing Liu, Tiejun Huang, and Xinlong Wang. Generative multimodal models are in-context  
744 learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recogni-*  
745 *tion*, pp. 14398–14409, 2024b.
- 746 Dídac Surís, Sachit Menon, and Carl Vondrick. Vipergpt: Visual inference via python execution for  
747 reasoning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp.  
748 11888–11898, 2023.
- 749 Chameleon Team. Chameleon: Mixed-modal early-fusion foundation models. *arXiv preprint*  
750 *arXiv:2405.09818*, 2024.

- 756 Vikram Voleti, Chun-Han Yao, Mark Boss, Adam Letts, David Pankratz, Dmitry Tochilkin, Chris-  
757 tian Laforte, Robin Rombach, and Varun Jampani. Sv3d: Novel multi-view synthesis and 3d  
758 generation from a single image using latent video diffusion. *arXiv preprint arXiv:2403.12008*,  
759 2024.
- 760 Zhenyu Wang, Aoxue Li, Zhenguo Li, and Xihui Liu. Genartist: Multimodal llm as an agent for  
761 unified image generation and editing. *arXiv preprint arXiv:2407.05600*, 2024.
- 762 Alexander Wei, Nika Haghtalab, and Jacob Steinhardt. Jailbroken: How does llm safety training  
763 fail? *Advances in Neural Information Processing Systems*, 36, 2024.
- 764 Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny  
765 Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in  
766 neural information processing systems*, 35:24824–24837, 2022.
- 767 Shengqiong Wu, Hao Fei, Leigang Qu, Wei Ji, and Tat-Seng Chua. Next-gpt: Any-to-any multi-  
768 modal llm. *arXiv preprint arXiv:2309.05519*, 2023.
- 769 Tsung-Han Wu, Long Lian, Joseph E Gonzalez, Boyi Li, and Trevor Darrell. Self-correcting llm-  
770 controlled diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision  
771 and Pattern Recognition*, pp. 6327–6336, 2024a.
- 772 Yecheng Wu, Zhuoyang Zhang, Junyu Chen, Haotian Tang, Dacheng Li, Yunhao Fang, Ligeng  
773 Zhu, Enze Xie, Hongxu Yin, Li Yi, et al. Vila-u: a unified foundation model integrating visual  
774 understanding and generation. *arXiv preprint arXiv:2409.04429*, 2024b.
- 775 Peng Xia, Siwei Han, Shi Qiu, Yiyang Zhou, Zhaoyang Wang, Wenhao Zheng, Zhaorun Chen,  
776 Chenhang Cui, Mingyu Ding, Linjie Li, et al. Mmie: Massive multimodal interleaved compre-  
777 hension benchmark for large vision-language models. *arXiv preprint arXiv:2410.10139*, 2024.
- 778 Chaojun Xiao, Zhengyan Zhang, Chenyang Song, Dazhi Jiang, Feng Yao, Xu Han, Xiaozhi Wang,  
779 Shuo Wang, Yufei Huang, Guanyu Lin, et al. Configurable foundation models: Building llms  
780 from a modular perspective. *arXiv preprint arXiv:2409.02877*, 2024.
- 781 Jinheng Xie, Weijia Mao, Zechen Bai, David Junhao Zhang, Weihao Wang, Kevin Qinghong Lin,  
782 Yuchao Gu, Zhijie Chen, Zhenheng Yang, and Mike Zheng Shou. Show-o: One single transformer  
783 to unify multimodal understanding and generation. *arXiv preprint arXiv:2408.12528*, 2024.
- 784 Jinbo Xing, Menghan Xia, Yong Zhang, Haoxin Chen, Xintao Wang, Tien-Tsin Wong, and Ying  
785 Shan. Dynamicrafter: Animating open-domain images with video diffusion priors. *arXiv preprint  
786 arXiv:2310.12190*, 2023.
- 787 Cheng Xu, Shuhao Guan, Derek Greene, M Kechadi, et al. Benchmark data contamination of large  
788 language models: A survey. *arXiv preprint arXiv:2406.04244*, 2024.
- 789 Jiayi Ye, Yanbo Wang, Yue Huang, Dongping Chen, Qihui Zhang, Nuno Moniz, Tian Gao, Werner  
790 Geyer, Chao Huang, Pin-Yu Chen, et al. Justice or prejudice? quantifying biases in llm-as-a-  
791 judge. *arXiv preprint arXiv:2410.02736*, 2024.
- 792 Ann Yuan, Andy Coenen, Emily Reif, and Daphne Ippolito. Wordcraft: story writing with large lan-  
793 guage models. In *Proceedings of the 27th International Conference on Intelligent User Interfaces*,  
794 pp. 841–852, 2022.
- 795 Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens,  
796 Dongfu Jiang, Weiming Ren, Yuxuan Sun, et al. Mmmu: A massive multi-discipline multi-  
797 modal understanding and reasoning benchmark for expert agi. In *Proceedings of the IEEE/CVF  
798 Conference on Computer Vision and Pattern Recognition*, pp. 9556–9567, 2024.
- 799 Jieyu Zhang, Weikai Huang, Zixian Ma, Oscar Michel, Dong He, Tanmay Gupta, Wei-Chiu Ma,  
800 Ali Farhadi, Aniruddha Kembhavi, and Ranjay Krishna. Task me anything. *arXiv preprint  
801 arXiv:2406.11775*, 2024a.

- 810 Kaiwen Zhang, Yifan Zhou, Xudong Xu, Bo Dai, and Xingang Pan. Diffmorpher: Unleashing the  
811 capability of diffusion models for image morphing. In *Proceedings of the IEEE/CVF Conference*  
812 *on Computer Vision and Pattern Recognition*, pp. 7912–7921, 2024b.
- 813 Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q Weinberger, and Yoav Artzi. Bertscore: Evaluat-  
814 ing text generation with bert. *arXiv preprint arXiv:1904.09675*, 2019.
- 815 Yihua Zhang, Yimeng Zhang, Yuguang Yao, Jinghan Jia, Jiancheng Liu, Xiaoming Liu, and Sijia  
816 Liu. Unlearncanvas: A stylized image dataset to benchmark machine unlearning for diffusion  
817 models. *arXiv preprint arXiv:2402.11846*, 2024c.
- 818 Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao,  
819 Yu Zhang, Yulong Chen, et al. Siren’s song in the ai ocean: a survey on hallucination in large  
820 language models. *arXiv preprint arXiv:2309.01219*, 2023.
- 821 Haozhe Zhao, Xiaojian Ma, Liang Chen, Shuzheng Si, Rujie Wu, Kaikai An, Peiyu Yu, Minjia  
822 Zhang, Qing Li, and Baobao Chang. Ultraedit: Instruction-based fine-grained image editing at  
823 scale. *arXiv preprint arXiv:2407.05282*, 2024.
- 824 Kaizhi Zheng, Xuehai He, and Xin Eric Wang. Minigt-5: Interleaved vision-and-language genera-  
825 tion via generative vokens. *arXiv preprint arXiv:2310.02239*, 2023.
- 826 Chunting Zhou, Lili Yu, Arun Babu, Kushal Tirumala, Michihiro Yasunaga, Leonid Shamis, Jacob  
827 Kahn, Xuezhe Ma, Luke Zettlemoyer, and Omer Levy. Transfusion: Predict the next token and  
828 diffuse images with one multi-modal model. *arXiv preprint arXiv:2408.11039*, 2024.
- 829 Kaijie Zhu, Jindong Wang, Jiaheng Zhou, Zichen Wang, Hao Chen, Yidong Wang, Linyi Yang, Wei  
830 Ye, Yue Zhang, Neil Zhenqiang Gong, et al. Promptbench: Towards evaluating the robustness of  
831 large language models on adversarial prompts. *arXiv preprint arXiv:2306.04528*, 2023.
- 832 Wanrong Zhu, Jack Hessel, Anas Awadalla, Samir Yitzhak Gadre, Jesse Dodge, Alex Fang, Young-  
833 jae Yu, Ludwig Schmidt, William Yang Wang, and Yejin Choi. Multimodal c4: An open, billion-  
834 scale corpus of images interleaved with text. *Advances in Neural Information Processing Systems*,  
835 36, 2024.
- 836 Dimitri Zhukov, Jean-Baptiste Alayrac, Ramazan Gokberk Cinbis, David Fouhey, Ivan Laptev, and  
837 Josef Sivic. Cross-task weakly supervised learning from instructional videos. In *Proceedings of*  
838 *the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 3537–3545, 2019.
- 839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863



## 864 A DISCUSSIONS AND FUTURE WORKS

865  
866 **Improving Unified Models with Advanced Interleaved Datasets.** Our results highlight the poten-  
867 tial of unified autoregressive model structures like Anole (Chern et al., 2024) and Show-o (Xie et al.,  
868 2024), while revealing substantial room for improvement in their instruction following and accurate  
869 generation capabilities. This underscores the need for dedicated interleaved datasets, particularly  
870 for vision-dominant tasks. Current datasets, limited to unimodal tasks or loosely aligned vision-  
871 language pairs (Chen et al., 2024d), inadequately address the challenges of generating coherent  
872 interleaved content. Additionally, existing interleaved datasets are predominantly language-centric,  
873 failing to establish robust vision-language dependencies crucial for enhanced multimodal under-  
874 standing and generation. In this context, our compositional agent, ISG-AGENT, shows promise as  
875 a pipeline for synthetic interleaved instruction tuning and vision-centric data, potentially advancing  
876 the development of unified generative models.

877 **Improving Evaluation Framework for Transparency and Reliability.** Although we have care-  
878 fully built the whole benchmark from scratch with cross-validation and evaluated the reliability of  
879 these generative models in the question generation and VQA module, concluding that it’s practical to  
880 use them as evaluators, the potential trustworthiness problem of LLMs should be noted as they still  
881 make mistakes in evaluation. Moreover, due to their inherent structure, their evaluation lacks trans-  
882 parent and interpretable results. Therefore, a future direction lies in reducing the AI models in the  
883 evaluation process, like *Task Me Anything* (Zhang et al., 2024a), to synthetically generate questions  
884 paired with answers to evaluate model performance with highest truthfulness and confidence.

885 **A Flexible and Integrative Compositional Strategy.** In this study, we explore a compositional  
886 agent strategy (Xiao et al., 2024) that integrates diverse model modules to generate interleaved multi-  
887 modal content. Experimental results indicate that further enhancing each sub-module’s performance  
888 may significantly improve the overall generative capabilities (Ma et al., 2024). Consequently, the  
889 compositional model not only demonstrates high flexibility and adaptability but also serves as a piv-  
890 otal component in the advancement of unified models, particularly by functioning as a synthetic data  
891 pipeline to facilitate interleaved dataset construction. By leveraging high-quality generated content,  
892 this synthetic dataset further augments the generalization capabilities of unified multimodal mod-  
893 els. Thus, its application not only contributes to exploring the upper-performance bounds of current  
894 unified models.

895 **Trustworthiness of Interleaved Generation.** While ISG-BENCH provides a strong foundation  
896 for evaluating accurate multimodal interleaved generation, a critical yet underexplored aspect is  
897 trustworthiness (Huang et al., 2024) within these models. However, evaluating trustworthiness for  
898 interleaved generation presents several key challenges: **1)** Previous research (Liu et al., 2023; Zhang  
899 et al., 2023; Huang & Sun, 2023) mainly focus on single-modality generative models (e.g., LLMs),  
900 while challenges across text-and-image are not well addressed. **2)** Another significant challenge is  
901 assessing the robustness of interleaved generation models against adversarial inputs (e.g., jailbreak  
902 attacks (Wei et al., 2024)) or unexpected variations in prompts (Zhu et al., 2023). These models may  
903 produce misleading or harmful outputs when manipulated through subtle alterations in the input text  
904 or images. Evaluating a model’s resistance to such attacks is particularly difficult in a multimodal  
905 setting, as an attack could target just one modality (e.g., a slight change in a word or a pixel) and  
906 still cause cascading effects on the overall output.

## 908 B DETAILED ISG-BENCH CONSTRUCTION

### 909 B.1 GENERAL INFORMATION

910  
911  
912 As shown in Figure 3, our benchmark are first categorized by dominated modal, i.e., **Vision, Lan-**  
913 **guage** and **Both**, followed by 8 categories and 21 sub-categories classified by their definitions. All  
914 samples in ISG-BENCH are featuring multimodal input (except one category) with most images  
915 collected from existing datasets and text content manually constructed. While MLLMs were used  
916 to generate golden answers for some tasks, these underwent thorough human refinement to ensure  
917 benchmark accuracy and quality. We provide all MLLM prompts used, and all image-text content  
was safety-reviewed to ensure benchmark security, quality, and transparency. Refer to Section B.3

918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971

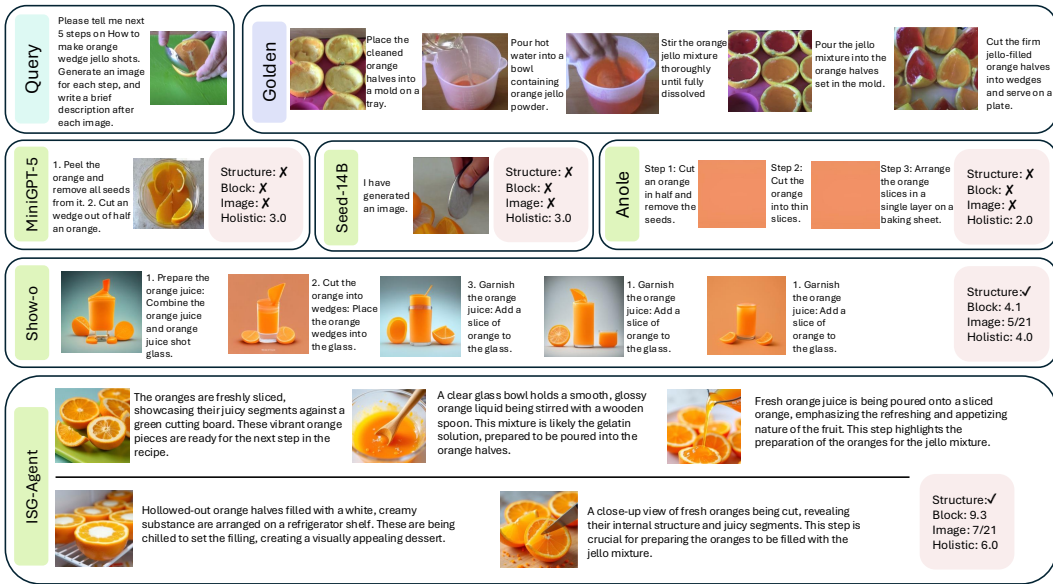


Figure 6: Case study evaluation performed by ISG-BENCH, with each generation resulting to a four-level scoring sheet. Mini-GPT5 and Seed-14B fail to generate interleaved content, while Anole generates low-quality images.

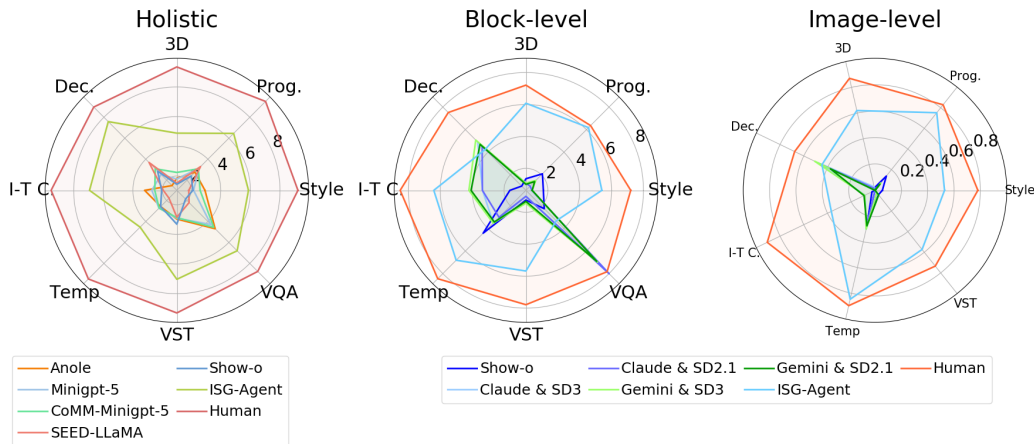


Figure 7: Comparative performance of unified models and compositional frameworks. All interleaved generative methods largely fall behind human-annotated golden answers.

for human annotation details, Section C for additional quantitative analysis, and Section C.2 for NSFW evaluation results.

## B.2 TASK DEFINITION AND SAMPLE COLLECTION

In this section, we provide detailed definitions, collecting pipelines including source datasets and how we collect golden answers, as well as examples for each task in our ISG-BENCH, aiming to provide transparent and detailed construction.

### B.2.1 VISUAL STORY TELLING

This task involves telling a story based on the input. The goal is to generate a coherent narrative sequence that combines both visual and textual information from the image. Previous articles required highly specific design frameworks to accomplish visual storytelling tasks (Liu et al., 2024b; Maha-

972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025

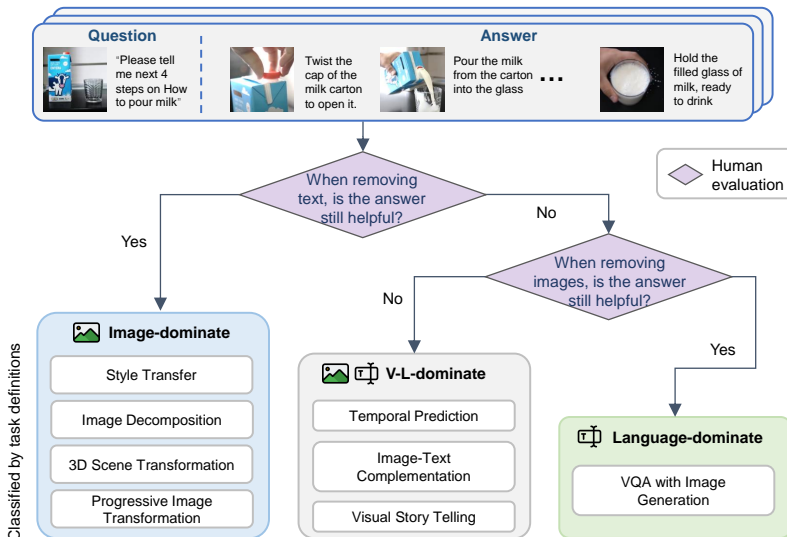


Figure 8: Tasks are classified by task dependency, according to the removal of one modal.

rana et al., 2022; Liu et al., 2024a), whereas the unified model offers a more general framework that is adequate for achieving the same goal.

**Image-based Visual Storytelling.** In this task, we benchmark the capability of image understanding, narrative generation, and creativity by presenting models with input images. Based on its understanding of the input images and its creativity in continuing the story, the model is expected to generate a sequence of image-text pairs. Each image should represent a scene in the story, and each accompanying text should describe the content of the image while also linking it to the preceding and following images. We provide an example of a golden answer in Figure 40.

We utilize images from the StorySalon dataset (Liu et al., 2024a), which offers a rich collection of videos and e-books featuring diverse characters, storylines, and artistic styles. Captions for each image, which include connections to the surrounding context, are generated by GPT-4o using the template shown in Figure 9.

```

Task: Generate contextually connected captions for each image.
Input: Images.
Output: Short captions that describe the storyline depicted in
each image while seamlessly connecting to the surrounding context.
Start with 'image1.', 'image2.' and so on.
Here are the images:[INSERT_IMAGES]
    
```

Figure 9: Prompt - Visual Storytelling.

**Text-based Visual Storytelling.** In this task, we benchmark the capability of textual understanding, narrative generation and creativity by presenting models with texts. Based on the input text and its creativity in continuing the story, the model is expected to generate a sequence of image-text pairs. Each image should represent a scene in the story, and each accompanying text should describe the content of the image while also linking it to the preceding and following images. We provide an example of a golden answer in Figure 41.

We utilize images from the StorySalon dataset (Liu et al., 2024a), where each image is accompanied by a short caption. Captions for each image, which include connections to the surrounding context, are generated by GPT-4o using the template shown in Figure 9.

**Image & Text-based Visual Storytelling.** In this task, we benchmark the capability of multimodal understanding, narrative generation and creativity by presenting models with image-text pairs. Based on its understanding of the input images, the text hints for subsequent episodes, and its creativity in continuing the story, the model is expected to generate a sequence of image-text pairs.

Each image should represent a scene in the story, and each accompanying text should describe the content of the image while also connecting it to the preceding and following images. We provide an example of a golden answer in Figure 42.

We utilize images from the StorySalon dataset (Liu et al., 2024a), which offers a rich collection of videos and e-books featuring diverse characters, storylines, and artistic styles. Captions for each image, which include connections to the surrounding context, are generated by GPT-4o using the template shown in Figure 9.

### B.2.2 VQA WITH IMAGE GENERATION

Presented with an image and a question, the model is supposed to not only provide a textual answer but also generate a new, relevant image to support or illustrate its response.

**Object Q&A and Explanation.** In this task, we benchmark the capability of explanatory and knowledge understanding. It involves providing a model with a mixed input of text and an image, where the text includes a question about the image’s content. The model is required to identify the subject in the image and generate an interleaved output of text and images that offers a thorough explanation about the subject. Examples can be found in Figure 43.

In this task, we focus on daily object explanations such as animals, plants, insects, daily items and electrical devices. We collect our image data from the Internet using Google and Bing. Provided reference answer to each question is generated by GPT-4o. The prompt to get this reference answer is the same as the original question in our benchmark.

**Historical Event Analysis.** In this task, we benchmark the capability of cultural interpretation, knowledge understanding and visual analysis. This task involves providing the model with a mixed input of text and an image, where the text includes a question about a historical site or artifact depicted in the image. The model is required to identify the place or artifact, describe its historical significance, and generate an interleaved output of text and images that offers a comprehensive analysis. We provide an example of a golden answer in Figure 44.

We collect our image data from the Internet using Google and Bing. Provided reference answer to each question is generated by GPT-4o. The prompt to get this reference answer is the same as the original question in our benchmark.

### B.2.3 TEMPORAL PREDICTION

The model is required to forecast future states or sequences based on initial conditions or partial information, such as predicting the progression of a natural phenomenon or the steps in creating a painting.

**Real World Simulation.** In this task, we benchmark the capability of commonsense reasoning, physical understanding and temporal reasoning. This task involves real-world simulation based on an input image containing both visual elements and text, to generate an image-text sequence that represents physical world phenomena. Each step in the output sequence should include: an generated or modified image showing the progression of the action; and accompanying text describing the change or action taking place. We provide an example of a golden answer in Figure 45.

We use dataset from Panda-70M (Chen et al., 2024c), which contains 70 million high-quality video-caption pairs across various domains, including animals, scenery, and food. We utilize GPT-4o to generate descriptions for images extracted from the relevant videos, with prompts shown in Figure 10.

**Painting Process Generation.** In this task, we benchmark the capability of artistic knowledge and temporal reasoning. This task involves generating a sequence of images and text that simulate the process of creating a painting from start to finish. The model is supposed to produce an image-text sequence that illustrates the painting process, where each step includes: an image showing the current state of the painting; and accompanying text describing the techniques, colors, or elements being added or modified. We provide an example of a golden answer in Figure 46.

We construct a dataset sourced from various painting process videos on YouTube, encompassing a range of painting styles, including oil painting, sketching, quick studies, and digital painting.

1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133

**Task:** Generate a caption for all images except the first one.  
**Input:** Image sequences about real-world physical phenomena.  
**Output:** Short captions (10-15 words) describe what is happening in Image sequences. Focus on the key changes or actions in physical world phenomena between images. Do not include any other information.  
 Here are the images:[INSERT.IMAGES]

Figure 10: Prompt - Real world simulation.

Additionally, we employ GPT-4o to generate relevant descriptions of each step in the process. The prompt template is shown in Figure 11.

**Task:** Generate a caption for all images.  
**Input:** Image sequences about the painting process.  
**Output:** Short captions (10-15 words) describe the painting stage in each image. Focus on the main objects, techniques, or elements being added or modified between images. Do not include any other information. Start with 'step1:', 'step2:', and so on. Make sure that the number of your answers is equal to the number of input images.  
 Here are the images:[INSERT.IMAGES]

Figure 11: Prompt - Painting process generation.

#### B.2.4 IMAGE-TEXT COMPLEMENTATION.

The model must generate images based on textual input, or conversely, produce text that complements and explains given images. In this task, visual and textual information are synergistically combined to enhance understanding and communication.

**HowTo.** In this task, we benchmark the capability of sequential reasoning, task decomposition, and procedural understanding. Given a high-level instruction or a text-image pair as input, generate a sequence of image-text pairs that represent steps to accomplish the given task. Each instruction will describe an action or transformation that should occur in the following frames. The output video should be consistent with the provided instructions, maintaining coherent transitions and logical scene progression. We provide an example of a golden answer in Figure 47.

We download HowTo videos from CrossTask (Zhukov et al., 2019) and ChangeIt (Souček et al., 2022), which cover instructional videos collected for different tasks. We captured the frames of the key steps from the video as output images. Descriptions are written by GPT-4o with templates outlined in Figure 12.

**Task:** Based on the instruction, generate a caption for each image.  
**Input:** Images sequences and instruction about [INSERT.QUESTIONS].  
**Output:** Use imperative sentences (10-15 words) describing what is in each image. Focus on the main objects and their relationships between images. Do not include any other information. Start with '1.', '2.' and so on. Make sure that the number of your answers is equal to the number of input images.  
 Here are the images:[INSERT.IMAGES]

Figure 12: Prompt - HowTo.

1134 **Scientific Phenomenon Explanation.** In this task, we benchmark the capability of scientific  
 1135 knowledge, analytical thinking and procedural understanding. This task requires the model to an-  
 1136alyze an image depicting a natural or scientific phenomenon. The model receives a mixed input  
 1137of text and an image, where the text includes a question about how the phenomenon in the image  
 1138is formed. The model is expected to identify the phenomenon, describe its formation process, and  
 1139generate an interleaved output of text and images that offers a detailed explanation. We provide an  
 1140example of a golden answer in Figure 48.

1141 The data for this task is crafted manually and relevant images are also collected from the Internet  
 1142 using Google and Bing. Reference answers are also generated by GPT-4o with the same prompt as  
 1143 the original question in our benchmark.

#### 1144 B.2.5 STYLE TRANSFER

1145 This task involves taking an input image with associated text and generating a sequence of trans-  
 1146formed images with corresponding text descriptions.

1149 **Art Style Transfer.** In this task, we benchmark the capability of artistic knowledge, style editing,  
 1150creativity, and novelty. The model is supposed to generate style-transferred versions of the input  
 1151image in different art periods (e.g., Renaissance, Impressionism, Cubism), or specified artists (e.g.,  
 1152Van Gogh, Picasso, Monet), each attached with a style description. We provide an example of a  
 1153golden answer in Figure 49.

1154 We use images from UnlearnCanvas (Zhang et al., 2024c), which includes high-resolution stylized  
 1155images from 60 different artistic painting styles across 20 different object categories. We directly  
 1156use the style name of the image to form the description.

1157 **Scene Attribute Transfer.** In this task, we benchmark the capability of attribute manipulation and  
 1158image editing. The model is supposed to generate a sequence of image-text pairs, where each image  
 1159is a transformed version of an input landscape photograph based on specified scene attributes (e.g.,  
 1160weather, lighting, time of day, season), and each text describes the applied transformation. Changes  
 1161should be photorealistic and faithful to the specified attributes. We provide an example of golden  
 1162answer in Figure 50.

1163 We use images from TransientAttributes (Laffont et al., 2014), which includes scene appearances  
 1164with 40 transient attributes related to weather, lighting, time of day, season, and more subjective  
 1165impressions (e.g. “mysterious” and “soothing”). We manually choose attributes of the image from  
 1166the dataset to form the description.

1167 **Photo Variation.** In this task, we benchmark the capability of image analysis and photo editing.  
 1168The model is supposed to generate a sequence of image-text pairs that show various adjustments to  
 1169an input photograph, along with descriptive text for each adjustment. Adjustment Categories include  
 1170exposure, sharpness, brightness, contrast, color temperature, hue, saturation. Changes should be  
 1171high-quality and natural-looking. We provide an example of a golden answer in Figure 51.

1172 We use photos from MIT-Adobe FiveK (Bychkovsky et al., 2011), which consists of 5 sets of 5,000  
 1173example input-output image pairs, each edited by trained photographers. We use GPT-4o to describe  
 1174images and the prompt template is outlined in Figure 13.

1176 **Task:** Generate a caption for all images except the first one.  
 1177 **Input:** Images. **Output:** Short captions (5-15 words) describe  
 1178 what adjustment has been made, when the next followed image is  
 1179 compared with the first image, one by one. Do not include any  
 1180 other information. Start with '1. ', '2.' and so on.  
 1181 Make sure that the number of your answers is 1 less than the number  
 1182 of input images.  
 1183 Here are the images:[INSERT\_IMAGES]

1184 Figure 13: Prompt - Photo variation.

1185 **Portrait Variation.** In this task, we benchmark the capability of facial analysis and image edit-  
 1186ing. The model is supposed to generate a sequence of image-text pairs showing a person at similar  
 1187

ages based on an input portrait, along with descriptive text for each image. Output images should ensure identity consistency across all generated images. We provide an example of golden answer in Figure 52.

We use human portraits from similar ages of the same person in MORPH dataset (Ricanek & Tesafaye, 2006). Descriptions for each step is written by GPT-4o with following prompt template in Figure 14.

```

Task: Generate a caption for all images except the first one.
Input: Images taken in similar ages.
Output: Short captions (5-15 words) describe what is different,
when the next followed image is compared with the first image, one
by one. Do not include any other information. Start with '1. ',
'2.' and so on.
Make sure that the number of your answers is 1 less than the number
of input images.
Here are the images:[INSERT_IMAGES]

```

Figure 14: Prompt - Portrait variation.

#### B.2.6 IMAGE DECOMPOSITION

This task involves image decomposition based on an input image containing both visual elements and text, with the goal of segment or generating an image-text sequence that breaks down the image into its constituent parts.

**Realistic Image Decomposition.** In this task, we benchmark the capability of object detection and segmentation, and object recognition. The model is supposed to generate image-text pairs where each image showcases objects detected within real-world scenes. The text should detail the objects and the event or relationships between the objects. The output images should ensure the accuracy of the required object present in the image. We provide an example of a golden answer in Figure 53. We selected 50 images from object detection datasets COCO (Lin et al., 2014) and SA1B from Segment-Anything (Kirillov et al., 2023). Rather than using the labeled images directly, we manually identified between two to eight objects in each image to ensure clarity. To maintain task precision, we opted for less crowded scenes. The model is required to generate images that closely resemble the identified objects. Golden answers were crafted using GPT-4o, followed by manual inspection and refinement. The prompt can be found in Figure 15.

```

Task: Given you the task description and the original image,
generate captions for each object required in the task. Focus on
objects' key features.
Input: Task description and the input image.
Output: You should give feedback in the format required by the
task, first describe the whole image, then orderly caption each
object one by one. You don't need to generate any image, but
describe them.

```

Figure 15: Prompt - Realistic (Synthetic) Image Decomposition.

**Synthetic Image Decomposition.** In this task, we benchmark the capability of stylized object detection, object identification and extraction. The model is supposed to generate image-text pairs that highlight the detection of objects within virtual or stylized environments, such as digital artwork or fantasy scenes. Each description should caption the corresponding objects in the image. Models should respond without losing any object and precisely cut out the objects from the image or generate similar objects within the image. We provide an example of a golden answer in Figure 54.

We constructed the input images for synthetic image decomposition using search engines and video platforms, resulting in a dataset comprising AI-generated images, real artworks, animations, pixel art, and stamps. To enhance task clarity, we selected images with fewer objects to avoid ambiguity

in descriptions. Similar to the realistic image decomposition task, we utilized the above prompt in Figure 15 to generate reference answers, which were then manually inspected and corrected.

**Semantic Decomposition.** In this task, we benchmark the capability of semantic segmentation and hierarchical understanding. The model is supposed to generate image-text pairs that present the hierarchy of the image. Output Images should precisely segment the region based on the user’s prompt from the raw image. The text should correctly label the segmented image and give more information about the image-text input. In addition, enhancing the composition suggestions are given. We provide an example of a golden answer in Figure 55.

We manually selected fifty high-quality and challenging images from the BG-20K dataset (Li et al., 2022) suitable for semantic segmentation. These images encompass not only foreground-background distinctions but also left-right and top-bottom segmentation. To maintain clarity, we avoided overly ambiguous images. We confirmed the segmentation methods with GPT-4o and ultimately constructed golden answers using the following prompt shown in Figure 16.

**Task:** Given you the task description and the original image, generate captions for each region required in the task. Focus on objects’ key features.  
**Input:** Task description and the input image.  
**Output:** You should give feedback in the format required by the task, first describe the whole image, then orderly caption each region one by one. You don’t need to generate any image, but describe them.

Figure 16: Prompt - Semantic Decomposition.

### B.2.7 3D TRANSFORMATION

This task involves 3D Transformation based on an input image containing visual elements and text, with the output being an image-text sequence representing different views or angles of the scene or object.

**Multi-view Scene Generation.** In this task, we benchmark the capability of 3D scene understanding, spatial reasoning and viewpoint synthesis. Based on the input image, the model is expected to generate a sequence of image-text pairs. Each image should depict the scene from the input image as viewed from a different angle, with each accompanying text explaining the observation angle. The objects in the output images must remain consistent across all views. We provide an example of a golden answer in Figure 56.

**Multi-angle Object Generation.** In this task, we benchmark the capability of 3D object reconstruction and single-view to multi-view object synthesis. This task involves providing a model with a single image of an object within a scene, along with a textual instruction that specifies the generation of additional images of the object from different perspectives. The model is required to interpret the instruction and generate a series of images showing the object from various angles, such as left to right, while maintaining consistency in the object’s appearance. An instance can be found in Figure 57.

We download images of different angles from ABO (Collins et al., 2022) where we extract golden answer images from five target perspectives. We directly use the angle to form the caption.

### B.2.8 PROGRESSIVE IMAGE TRANSFORMATION

This task involves generating a sequence of images that show gradual changes based on an initial input image and a text prompt. The output is not just a single transformed image, but a series of images showing the progression of the transformation.

We gain a 90-images high quality image morphing dataset using Diffmorpher (Zhang et al., 2024b). By dividing them into two parts. One for Text-guided animation, the other for Image-guided animation.



**Text-guided Animation.** In this task, we benchmark the capability of textual understanding and guided image progression modeling. Based on the input image and the accompanying text that explains the desired final state, the model is expected to generate a sequence of image-text pairs. Each image should represent a stage in the transformation process, and each accompanying text should describe the change occurring in the corresponding part. We provide an example of a golden answer in Figure 58.

We selected 50 easily captioned image pairs from the DiffMorpher dataset (Zhang et al., 2024b). After selection, we prompted GPT-4o to generate captions for a randomly selected image from each pair, replacing the image with a text description as desired final stage. Since the morphing process is an open-ended problem, it aims to make sure each stage is more closer to the text description of the final stage.

**Image-guided Animation.** In this task, we benchmark the capability of visual understanding and state transformation synthesis. Based on the input images, one representing the initial state and the other the final state, the model is expected to generate a sequence of image-text pairs. Each image should depict a stage in the transformation process, with each accompanying text describing the change occurring in the corresponding part. We provide an example of a golden answer in Figure 59.

For this task, we utilized 50 randomly sampled image pairs from the Diffmorpher dataset (Zhang et al., 2024b). To enhance the diversity of the input, we employed data augmentation techniques, which included randomly selecting different initial and final stages. We shifted our focus away from strictly adhering to golden answers. This task aims to make sure each stage is more closer to the final stage’s image. Therefore, we pay less attention to the golden answer construction.

**Attribute-guided Image Generation.** In this task, we benchmark the capability of controlled visual attribute manipulation and image synthesis. The model is required to generate a series of images that depict gradual transitions, such as from wealth to poverty, noise to silence, or cleanliness to disorder. Each image reflects the gradual change in state, driven by the transformation or synthesis process while maintaining core structural integrity. The final images should be realistic, clearly illustrating the progression of visual states as guided by the specified changes. We provide an example of a golden answer in Figure 60.

The dataset is created using the DALL-E model from GPT-4o, which generates images based on prompt phrases describing key attribute changes, with accompanying image descriptions also generated by GPT-4o. The prompt template is presented in Figure 17.

```

Task: Generate a caption for all images except the first one.
Input: Image sequences about attribute-guided transitions.
Output: Short captions (5-15 words) describe the key attribute
transitions happening in each image. Focus on gradual transitions
and changes in the primary attributes. Do not include any other
information.
Make sure that the number of your answers is 1 less than the number
of input images.
Here are the images:[INSERT_IMAGES]

```

Figure 17: Prompt - Attribute-guided image generation.

### B.3 HUMAN ANNOTATION

The annotation process on ISG is carried out independently by six authors of this paper, each bringing a diverse perspective to the evaluation. Recognizing the importance of annotator diversity, we have selected individuals with varied genders, ages, and educational backgrounds, all of whom possess expertise in the domain. This diversity is instrumental in minimizing bias and enhancing the reliability of our benchmark.

To ensure that our annotators are well-prepared to objectively assess ISG, we have provided them with comprehensive tutorials. These tutorials guide them on how to critically evaluate aspects of the responses, including structure, entities, attributes, and relations. Moreover, we employ cross-

1350 validation techniques among different annotators to ensure consistency and objectivity in their judg-  
1351 ments. This rigorous approach ensures that our data is marked with a high level of precision and  
1352 impartiality, providing a robust foundation for our research findings.

1353 We provide an annotation interface for annotation participants, including Image-level VQA human  
1354 annotation, Block-level VQA human annotation, MLLM-as-a-Judge human agreement annotation  
1355 and MLLM-as-a-Judge human scoring annotation, as shown in Figure 18.  
1356

1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403

1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457



Question: Is the human wearing white in this image?

General Judge:

Do you think the output is correct or not?

Yes  
 No

(a) Image-level VQA human annotation

Subject: <gen\_img2>



Object: <gen\_img1>



Question: Is the first image the next part of the story after the second image?

VQA\_judge\_Yes\_No:

What do you consider, Yes or No?  
 Yes  
 No

VQA\_judge\_Score:

Please enter the score you think this answer:

(b) Block-level VQA human annotation

general\_judge\_W\_GT:

```

{
  "coherence": {
    "score": 7
    "explanation":
    "The answer provides a series of images and descriptions that follow a logical sequence, showing interactions between the cheetah and the rabbit. However, the transition to the image of humans working in a field disrupts the coherence of the story."
  }
  "content_accuracy": {
    "score": 6
    "explanation":
    "The images and descriptions are factually correct in terms of depicting interactions between a cheetah and a rabbit. However, the inclusion of humans working in a field is not consistent with the animal-focused narrative."
  }
  "relevance_and_responsiveness": {
    "score": 5
    "explanation":
    "The answer partially addresses the query by continuing the story with new images and descriptions. However, the inclusion of an unrelated image of humans working in a field reduces the relevance and responsiveness to the original query."
  }
  "visual_textual_alignment": {
    "score": 8
    "explanation":
    "The images generally match the accompanying text well, depicting the interactions and emotions described. The alignment is strong, except for the unrelated image of humans."
  }
  "creativity_and_originality": {
    "score": 7
    "explanation":
    "The answer shows creativity in depicting the interactions between the cheetah and the rabbit, creating a narrative of unlikely friendship. The inclusion of the human image, while original, detracts from the overall story."
  }
  "overall_score": 6.6
  "final_thoughts":
  "The answer provides a mostly coherent and creative continuation of the story with good visual-textual alignment. However, the inclusion of an unrelated image of humans working in a field disrupts the narrative and reduces the overall relevance and coherence."
}

```

Do you satisfy with the output?  
 Yes  
 No

(c) MLLM-as-a-Judge human agreement annotation

HUMAN\_JUDGE:

Judge Requirement: Evaluate the answer based on the following dimensions:

1. Coherence: How well the text and images work together to convey a unified message or story.
2. Content Accuracy: The factual correctness of both textual information and visual elements.
3. Relevance and Responsiveness: How well the generated content addresses the given query.
4. Visual-Textual Alignment: The degree to which generated images match and support the accompanying text.
5. Creativity and Originality: The model's ability to generate novel and imaginative content across both text and images.

Please enter the coherence score you think the answer (1-10):

Please enter the content accuracy score you think this answer (1-10):

Please enter the relevance\_and\_responsiveness score you think this answer (1-10):

Please enter the visual\_textual\_alignment score you think this answer (1-10):

Please enter the creativity\_and\_originality score you think this answer (1-10):

Please enter the overall\_score you think this answer (1-10):

(d) MLLM-as-a-Judge human scoring annotation

Figure 18: The annotation interface.

## 1458 C ANALYSIS ON ISG-BENCH

1459

### 1460 C.1 GOLDEN ANSWER

1461

1462 Figure 19 illustrates the distribution of image-word number per sample across eight tasks in golden  
1463 answers. Darker colors indicate a higher number of documents. The  $\mu$  and M represent the mean  
1464 and median number of images/sentences in samples, respectively. These tasks range from “*Visual*  
1465 *Storytelling*” to “*Progressive Image Transformation*” with each task having varying distributions of  
1466 image-to-word ratios.

1467 In tasks like “*Visual Storytelling*” and “*VQA with Image Generation*”, there is a higher concentra-  
1468 tion of words per sample (above 100), indicating that these tasks require more detailed descriptions.  
1469 Meanwhile, tasks such as “*Style Transfer*” and “*3D Scene Transformation*”, focus more on images,  
1470 with a lower median word count. The difference between the mean and median in several tasks also  
1471 highlights the presence of outliers, particularly in tasks like “*Image Decomposition*” and “*Progres-*  
1472 *sive Image Transformation*”, where a few samples have significantly higher numbers of words or  
1473 images per sample compared to the majority.

1474

### 1475 C.2 SAFETY CHECKING

1476

1477 **This part contains examples of harmful contents. Reader discretion is recommended.**

1478

1479 In this section, we provide a detailed analysis of trustworthiness problems in ISG-BENCH, focusing  
1480 on NSFW content in images and text content separately. **NSFW Image Filtering.** Figure 20 illus-  
1481 trates the proportion of unsafe and safe images across all categories based on the model’s judgments.  
1482 Out of all the images used, only two (shown in Figure 21) were genuinely unsafe. The remaining  
1483 images flagged as unsafe were false positives, as demonstrated in Figure 22.

1484 **NSFW Text Content Filtering.** Figure 23 shows the proportions of unsafe and safe text content  
1485 (both query and golden answer) across all categories, based on the model’s evaluations. Among the  
1486 text content, only one instance in the query and five in the golden answer were truly unsafe. The rest  
1487 of the flagged text were false positives, as illustrated in Figure 24.

1488

1489

1490

1491

1492

1493

1494

1495

1496

1497

1498

1499

1500

1501

1502

1503

1504

1505

1506

1507

1508

1509

1510

1511

1512  
 1513  
 1514  
 1515  
 1516  
 1517  
 1518  
 1519  
 1520  
 1521  
 1522  
 1523  
 1524  
 1525  
 1526  
 1527  
 1528  
 1529  
 1530  
 1531  
 1532  
 1533  
 1534  
 1535  
 1536  
 1537  
 1538  
 1539  
 1540  
 1541  
 1542  
 1543  
 1544  
 1545  
 1546  
 1547  
 1548  
 1549  
 1550  
 1551  
 1552  
 1553  
 1554  
 1555  
 1556  
 1557  
 1558  
 1559  
 1560  
 1561  
 1562  
 1563  
 1564  
 1565

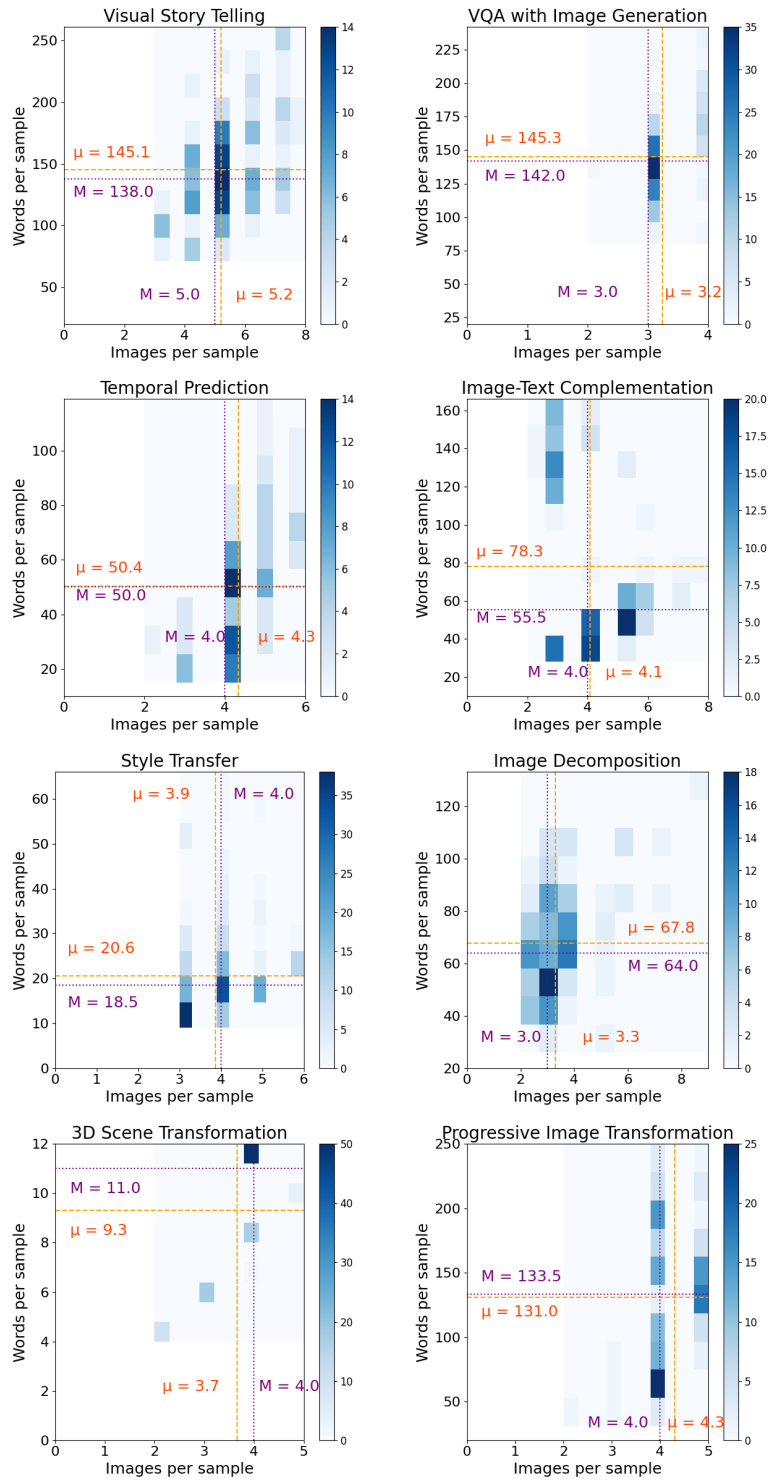


Figure 19: Visualization of the image-word numbers per sample distribution of eight tasks in golden answer. The  $\mu$  and M denote the mean/median number of images/words in samples, respectively.

1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619

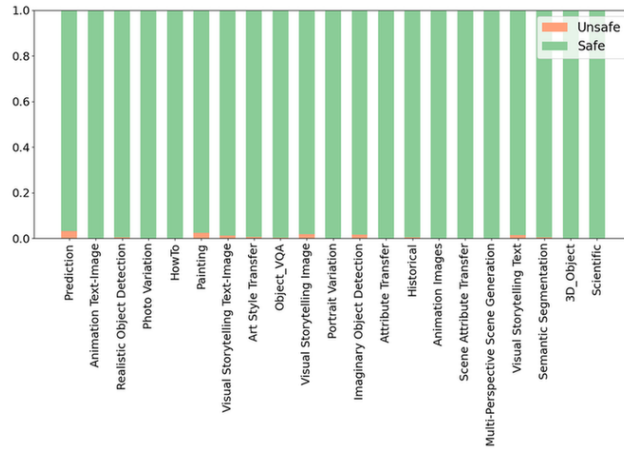


Figure 20: Proportion of unsafe and safe images in each category

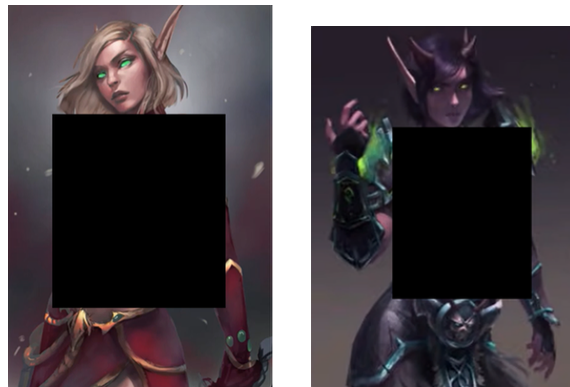


Figure 21: Unsafe images

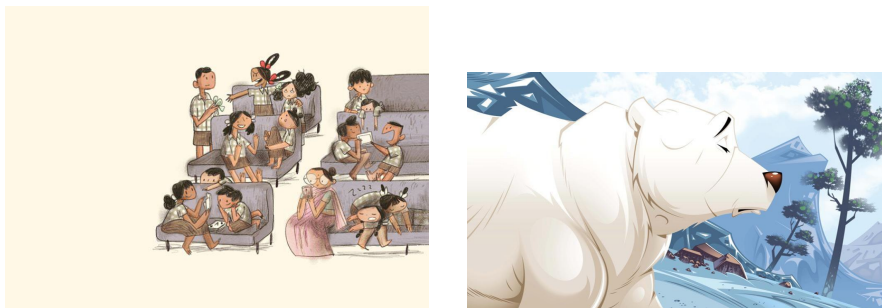


Figure 22: Images that are judged to be unsafe but are actually safe.

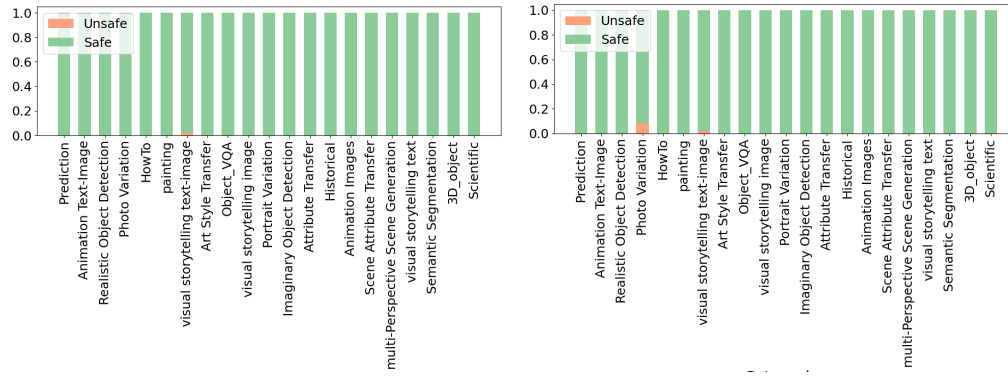


Figure 23: Proportion of unsafe and safe text in each category - query (left) and golden answer (right)

**Query:** “The girl will play happily in the park.” Based on the <image1> and the provided text prompts, continue the story, presenting it through 4 new PNG images with descriptions. Ensure each text includes connecting phrases for smooth transitions. For example, <image1> [description1], <image2> [description2].

**Golden Answer:** The little girl cautiously climbs up the tall slide, looking slightly nervous but determined. She reaches the top and sits down, her legs dangling over the edge. She takes a deep breath and pushes off, sliding down the slide with a giggle. She reaches the bottom safely and runs back to the top to do it again. The little boy watches his sister slide down the slide, looking a little jealous. He climbs up the slide and sits down, his legs dangling over the edge. He takes a deep breath and pushes off, sliding down the slide with a giggle. He reaches the bottom safely and runs back to the top to do it again. The little girl and boy continue to slide down the slide, taking turns and having fun. They are safe and happy, enjoying the playground together.

Figure 24: Texts that are judged to be unsafe but are actually safe.

1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727

Ambiguous Case of ISG

**Task:** Scientific phenomenon explanation  
 <gen\_text2>: As the tsunami travels across the open ocean, it may be barely noticeable on the surface, with wave heights of only a few feet. However, these waves contain enormous energy and can propagate for thousands of miles with minimal loss of energy. The wavelength between crests can be hundreds of kilometers long.

---

**Question:** Is this image related to <gen\_text2>?  
**VQA Yes-or-No:** No  
 The image shows large ocean waves, but the text describes a tsunami traveling across the open ocean, which is barely noticeable on the surface with wave heights of only a few feet. The image does not depict the described scenario.  
**VQA Score:** 8  
 The image shows large ocean waves, which could be related to the text about tsunamis and their wave characteristics.




Figure 25: Scoring beats Yes/No judging in ambiguous case of ISG.

## D DETAILED EXPERIMENT SETUPS

In this section, we provide prompts, and the whole pipeline settings of ISG in Section D.1, ISG-AGENT in Section D.2, and models hyperparameter settings in Section D.3.

### D.1 ISG DETAILS

The pseudo-algorithm of ISG is shown in Algorithm 1. We provide prompts for using MLLM to build ISG in and judge model’s responses

---

#### Algorithm 1 ISG Evaluation

---

```

1: procedure EVALUATE( $P, G$ )                                ▷ P: Prompt, G: Generated Answer
2:    $S_{\text{Pred}} \leftarrow \text{LLM}(P)$                             ▷ Predict Structure
3:   if  $\neg \text{StructureMatch}(S_{\text{Pred}}, G)$  then
4:     return EvaluateWithWhole( $P, G$ )
5:   end if
6:    $Questions \leftarrow \text{GenerateQA}(P)$                     ▷ Construct Block-wise (T-T, T-I, I-I) Evaluation
7:    $score \leftarrow 0, total \leftarrow 0$ 
8:   for all  $r = (sub, obj, Q) \in Questions$  do
9:      $judgement \leftarrow \text{VQA Module}(Q, sub, obj)$ 
10:    if  $judgement = \text{“Yes”}$  then
11:       $score \leftarrow score + 1$ 
12:    end if
13:     $total \leftarrow total + 1$ 
14:  end for
15:   $FinalScore \leftarrow score/total$ 
16:  return  $FinalScore$ 
17: end procedure

```

---

#### D.1.1 SCORING EVALUATION REDUCE AMBIGUITY WITHIN VQA MODULE

In VQA, we find that the scoring approach consistently outperforms the “Yes-or-No” method, suggesting that more nuanced judgments align better with human evaluations. As shown in Figure 25, the “Yes-or-No” answer is wrong but the VQA score is aligned with human judgement.



1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781

**Task:** Extract key information from a multimodal prompt and format it into JSON.  
**Input:** A prompt for a multimodal model to generate interleaved text-and-image content. The prompt may include input images.  
**Output:** JSON format containing the following keys: 1. “Query”: List representing the sequence of images and text in the input 2. “Answer”: List representing the sequence of images and text in the expected output  
**Special Tokens:** - Input query: - Images: <query\_img1>, <query\_img2>, ... - Text: <query\_text1>, <query\_text2>, ... - Generated output: - Images: <gen\_img1>, <gen\_img2>, ... - Text: <gen\_text1>, <gen\_text2>, ...  
**Here are examples: ...**  
**Instructions:** 1. Analyze the given prompt to determine the number of images and text pieces to be generated. 2. Identify the sequence of images and text in both the query and the expected answer. 3. Format the extracted information into the specified JSON structure. 4. There will not be adjacent <gen\_text>, such as <gen\_textX> <gen\_textX+1>. 5. Only output the sequence of images and text noted by <gen\_text> and <gen\_img> in the “Query” and “Answer”. 6. Think before you output your final answer, you can format your thought in a key “Thought” in your output and explain your answer to be generated.  
**Here is the prompt: ...**

Figure 26: Prompt - Structure Extraction.

**Task:** Extract and format the relationships between elements in a multimodal prompt and its expected generated answer.  
**Input:** 1. Original prompt for a multimodal model 2. Sequence of elements represented by special tokens  
**Output:** JSON format with a “relatio” key containing a list of triplets.  
**Relation Triplet Format:** (<subject>, <object>, <relation>) - <relation> is an open-vocabulary description (phrase or short sentence) - The triplet should be able to form a fluent English sentence: <subject> <relation> <object> - Avoid duplicate triplets - Only include relations explicitly described in the prompt - The order of <subject> and <object> should reflect the most logical and fluent relationship, regardless of their sequence in the input or output  
**Instructions:** 1. Analyze the given prompt carefully. 2. Identify explicit relationships between elements in both the prompt and expected answer. 3. Format relationships as triplets according to the specified format. 4. Ensure the triplets can be easily constructed into fluent English sentences. 5. Use specific descriptors for relations, forming phrases or short sentences. 6. Ensure all triplets are unique and explicitly described in the prompt. 7. Order <subject> and <object> in each triplet to create the most logical and fluent relationship. Do not include relations between input images and texts. 8. Compile the triplets into a list under the “relation” key in the JSON output. 9. Think before you output your final answer, you can format your thought in a key “Thought” in your output and explain your answer to be generated.  
**Here are examples: ...**  
**Note:** This example includes only the relations that can be confidently inferred from the prompt. The triplets are formed to create fluent English sentences when read as “<subject> <relation> <object>”. Do not include any obscure or ambiguous relations that can’t be understood by only reading the triplet. For example, “is an image of the third object extracted from” is an obscure relation because there is no “third” within this triplet, you can use “is an image of the object extracted from” instead.  
**Here is the prompt: ...**  
**Here is the element sequence: ...**

Figure 27: Prompt - Block-Level Requirements Extraction.

#### D.1.2 DETAILS OF MLLM-AS-A-JUDGE

We use MLLM-as-a-judge for an overall evaluation, including the following aspects:

- **Coherence:** How well the text and images work together to convey a unified message or story.
- **Content Accuracy:** The factual correctness of both textual information and visual elements.
- **Relevance and Responsiveness:** How well the generated content addresses the given query.
- **Visual-Textual Alignment:** The degree to which generated images match and support the accompanying text.

1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835

**Task:** Predict atomic concrete visual entities, attributes, and relations for generated images based on a prompt for a multimodal generative model.

**Input:** 1. Original prompt for a multimodal generative model 2. Sequence of elements represented by special tokens

**Output:** JSON format with a “tuple” key containing a list of tuples in the following formats: 1. Entity: (entity, name of entity, image\_id), for example: [“entity”, “fish”, “<gen\_img1>”] 2. Attribute: (attribute, name of attribute, entity, image\_id), for example: [“attribute”, “yellow”, “fish”, “<gen\_img1>”] 3. Relation: (relation, name of relation, entity1, entity2, image\_id), for example: [“relation”, “swim in”, “fish”, “water”, “<gen\_img1>”]

**Here are examples: ...**

**Instructions:** 1. Carefully analyze the given prompt, focusing on predicting concrete, visual elements that are highly likely to appear in the generated images. Do not describe or analyze any input images mentioned in the prompt. 2. If the prompt includes descriptions or captions of multiple input images, identify common themes and key visual elements across these descriptions. Use these commonalities to inform your predictions for the generated images. 3. Predict tangible entities first. These should be physical objects or beings that can be visually represented in generated images. Avoid abstract concepts or general scenes like ‘scene’, ‘atmosphere’, or ‘landscape’. 4. For each predicted entity, identify its likely visual attributes. Focus on characteristics that would be visibly apparent in a generated image. 5. You should atomize the entity and attribute as much as possible, and generate entity tuple first, then attribute tuple, and finally relation tuple. Make sure the entities, attributes, and relations are atomic. For example, you should not output “yellow fish” as an entity, you should output “fish” as an entity and “yellow” as an attribute. 6. For attributes and relations, always reference the specific entity or entities they are associated with. 7. Specify which generated image (image\_id) each predicted element is expected to appear in. If an entity is likely to appear in multiple generated images, create separate tuples for each image. **DO NOT INCLUDE** tuples can’t be inferred from prompt. 8. Only include tuples for elements you are highly confident (100% Sure) will appear in the generated images based on the prompt and common sense reasoning. Avoid speculating about details that aren’t strongly implied by the prompt! 9. For prompts describing a sequence of generated images, consider how visual elements might change or interact across the sequence. 10. Compile the tuples into a list under the “tuple” key in the JSON output.

**Here is the prompt: ...**

**Here is the element sequence: ...**

Figure 28: Prompt - Image-Level Requirements Extraction.

- **Creativity and Originality:** The model’s ability to generate novel and imaginative content across both text and images.

## D.2 ISG-AGENT DETAILS

To enable the interleaved generation of multiple image-text pairs, we employ a suite of advanced tools proficient at image generation, editing, and video creation. Our methodology integrates these tools to create a cohesive system capable of producing high-quality visual content alongside descriptive text. Figure 38 and 37 show examples of our ISG-AGENT’s output of a randomly selected task from our benchmark.

**Planning Phase.** To improve the model by providing a structured plan, we have designed the following prompt, with a special emphasis on enhancing the model’s abilities in:

- **Following Instruction to Output in Format:** Ensuring the model can produce output that strictly adheres to the task required interleaved format.
- **Planning with Tool Box:** Enabling the model to effectively plan tasks by breaking them down into manageable steps, utilizing a set of predefined tools, and providing precise instructions for each step.
- **Enhanced Task Clarity:** Improving the clarity and precision of task instructions, ensuring that each step is well-defined and easy to follow.
- **Consistency in Output:** Ensuring that the output is consistent across different tasks and steps, maintaining a high standard of quality and reliability.

1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889

**Task:** Create questions for each provided triplet to verify the stated relationship.  
**Input:** A list of triplets in the format (<subject>, <object>, <relation>).  
**Output:** A JSON list of objects, each containing the original triplet information and a generated question.  
**Here are examples: ...**  
**Instructions:** 1. For each input triplet, create an object with the following structure: “subject”: “<subject from triplet>”, “object”: “<object from triplet>”, “relation”: “relation from triplet”, “Question”: “<generated question>” 2. Generate a question that, when answered, would verify whether the stated relationship between the subject and object is correct. 3. Ensure the question is clear, concise, and directly related to the triplet’s content. 4. Replace image references (e.g., <gen\_img1>, <query\_img1>) with “this image” if only one image occurs in the triplet, otherwise replace with “first image”, “second image” for the subject and object based on their order of appearance in the triplet. 5. Do not use “third” or “fourth” images in the question, as in the question, the maximum number of images could only be 2 (subject and object). 6. Keep text references (e.g., <gen\_text1>, <query\_text1>) as they are in the original triplet. 7. Frame the question in a way that can be answered with a yes/no or true/false response. 8. Compile all generated objects into a JSON list.  
**Notice:** If subject and object are images (<gen\_img1>, <query\_img1>, etc.), refer the first image as “first image” and the second image as “second image” in your generated question. Ensure that the generated questions are diverse in their phrasing while maintaining clarity and relevance to the original triplet. The questions should be designed to elicit a yes/no or true/false response that verifies the relationship stated in the triplet. Remember to replace image references with “first image”, “second image”, etc., but keep text references as they are.  
**Here is the input:**

Figure 29: Prompt - Block-Level Question Generation.

**Task:** Create questions for each provided triplet of entity, attribute, or relation, and format them into a specific JSON structure.  
**Input:** A list of triplets in the following formats: 1. Entity: (entity, name of entity, image\_id) 2. Attribute: (attribute, name of attribute, entity, image\_id) 3. Relation: (relation, name of relation, entity1, entity2, image\_id)  
**Output:** A JSON list of objects, each containing the generated question and related information.  
**Here are examples: ...**  
**Instructions:** 1. For each input triplet, create an object with the following structure: “image”: special token refer to generated images, “Question”: “<generated question>”, “id”: <numeric id starting from 0>, “Preliminary”: [<list of prerequisite question ids>]  
2. Generate a question that verifies the existence of the entity, the presence of the attribute, or the relationship between entities. 3. Ensure the question is clear, concise, and can be answered with a yes/no response. 4. Assign a unique numeric id to each question, starting from 0. 5. Determine any prerequisite questions and list their ids in the “Preliminary” field. - For attributes, include the id of the corresponding entity question. - For relations, include the ids of both entity questions. 6. Compile all generated objects into a JSON list.  
**Note:** Ensure that the generated questions are clear and directly related to the triplet’s content. The “Preliminary” field should accurately reflect the dependencies between questions, especially for attributes and relations that depend on the existence of entities.  
**Here is the input: ...**

Figure 30: Prompt - Image-Level Question Generation.

The prompt is shown in Figure 34 and Figure 35, which give concise instruction for planning a task. **Key Instructions** construct the whole planning pipeline.

**Tool Box** offers insights to the planning agent for better step instruction generation. **Considerations** and **Remember** are used for controlling the output into strict format and clear instruction.

The refined plan offers the agent more control over the tool-execution phase.

**Tool-Execution Phase.** We integrate various advanced vision generative models as tools in our ISG-AGENT during agent execution process, detailed as follows:

1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943

**Task:** You are given two texts and a question. Please judge whether the question is correct within the two texts.  
**Judge Requirement:** You should output a score on a scale of 1-10 and your reason. The score should be a numerical value that reflects how well the question is answered by the given text and image. 10 means the question is answered perfectly. 1 means the question is not answered at all.  
**Output Requirement:** Please output in JSON format, directly output your judgment in key “Judge” and your reason in key “Reason”. Do not write an introduction or summary. Do not output other irrelevant information.  
**Here is the input:**  
**Text 1:** ...  
**Text 2:** ...  
**Question:** ...  
 Now please judge the question.

Figure 31: Prompt - Block-level VQA - Two Texts.

**Task:** You are a helpful assistant capable of analyzing images and answering questions about them. Your task is to examine the provided image and answer the given question.  
**Input:** - An image - A question about the image (e.g., “Is a dog in this image?” or “Is the dog blue in this image?”)  
**Output:** Provide your response in JSON format with the following structure: “Judge”: “Yes” or “No”, “Reason”: “Your explanation here”  
**Instructions:** 1. Analyze the provided image. 2. Consider the question asked about the image. 3. Determine whether the answer to the question is “Yes” or “No”. 4. Provide a brief but clear explanation for your judgment. 5. Format your response in the required JSON structure.  
**Here is the question:** ...  
 Now please judge the question. Remember to output in JSON format with “Judge” and

Figure 32: Prompt - Image-level VQA.

- **Image Generation Tool:** We use Stable Diffusion 2.1<sup>3</sup> or Flux.1-dev<sup>4</sup> to generate images based on textual prompts. In the system, the tool agent automatically provides refined and concise prompts extracted from the step’s prompt for better generation performance. Input Size: 512 × 512 pixels. Inference Steps: 28.
- **Image Editing Tool:** Instructpix2pix<sup>5</sup> and UltraEdit<sup>6</sup> is employed for precise image editing and enhancements. These two models can edit image with step’s prompt guidance. We utilize this capability for better instruction-guided image edit. Guidance Scale: 7.5. Image Guidance Scale: 1.5.
- **Video Generation Tool:** DynamiCrafter<sup>7</sup> is a video generation tool under video diffusion framework. It allows both text-image input and images interpolation, which helps to generate temporal continuous and frame-continuous video. In the output, we take screenshots from the video, maintain it’s continuity. Input Size: 256 × 256 pixels. Video Length: 32 frames. Guidance Scale: 7.5 (unconditional guidance). Guidance Rescale: 0.7. Conditional Input: Text-based input (True).
- **3D Video Generation Tool:** SV3D<sup>8</sup> is utilized for generating 3D video content by only image input. By including this tool, we grant our multi-agents framework the ability to understand the spatial information and to generate views of objects and scenes from different perspectives. In the output, we take fixed frame screenshots to fit our benchmark’s tasks. Number of Frames: 21. Conditional Augmentation: 1e-5. Decoding Time: 14.

<sup>3</sup><https://stablediffusion.com><sup>4</sup><https://blackforestlabs.ai/><sup>5</sup><https://github.com/timothybrooks/instruct-pix2pix><sup>6</sup><https://ultra-editing.github.io/><sup>7</sup><https://doubiiu.github.io/projects/DynamiCrafter/><sup>8</sup><https://sv3d.github.io/>

1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997

**Task:** You are a helpful and impartial assistant. You are given a multimodal query with one or several images and a multimodal answer with interleaved text and images. I will also provide a golden answer to the query. Please judge whether the answer is correct and relevant to the query in several dimensions.

**Judge Requirement:** Evaluate the answer based on the following dimensions: 1. Coherence: How well the text and images work together to convey a unified message or story.

2. Content Accuracy: The factual correctness of both textual information and visual elements.

3. Relevance and Responsiveness: How well the generated content addresses the given query.

4. Visual-Textual Alignment: The degree to which generated images match and support the accompanying text.

5. Creativity and Originality: The model’s ability to generate novel and imaginative content across both text and images.

**Output Requirement:** Please output in JSON format, including scores for each dimension (on a scale of 1-10) and a final overall score (on a scale of 1-10). Also provide brief explanations for each score.

Figure 33: Prompt - Overall-level MLLM-as-a-Judge.

- **DreamMover:** DreamMover<sup>9</sup> is an interpolation tool inspired by the DiffMorpher, so we utilize this tool on doing our augmented interpolation or morphing tasks. Guidance Scale: 1.0. Time for Morphing: 3 units.

All the tools are plug-ins within the tool-execution phase. By integrating these tools, we develop a robust pipeline that supports the generation and editing of images interleaved with textual descriptions generated by the ISG-AGENT.

**Refinement Phase.** Refinement Phase’s primary capability is to handle errors arising from incorrect planning or tool calling within the Planning-Execution phases. When it fails to generate a final result, it raises an error, which the ISG-AGENT then captures and addresses using different strategies based on the error category. For planning-related errors, the ISG-AGENT detect and reconstructs the entire plan solely based on the original blueprint. In contrast, for other types of errors, it meticulously examines the plan step by step, regenerating relevant input text to provide clearer instructions and ultimately produce an error-free result. Additionally, ISG-AGENT is tasked with smoothing the plan in this phase by creating more continuous text segments, a process facilitated by leveraging the LLM. The prompt used for this operation is illustrated in Figure 36.

**Limitations.** While our agent framework is designed to handle a variety of general interleaved tasks, several limitations must be acknowledged.

- **Lack of Continuity** Despite the Planning Agent’s comprehensive understanding of the objectives at each step, the Tool Agent encounters difficulties in accessing information from earlier stages and input accurate information into the tool. Given that large language models operate as black boxes, it is difficult to control the exact prompts input into the Tool Agent, further exacerbating the issue of continuity.
- **Resource Intensity** A significant challenge associated with multi-agent systems is the high resource cost. In our framework, the Tool Agent’s effectiveness is heavily dependent on a meticulously planned initial phase. If the planning is not sufficiently detailed or well-structured, the operational efficiency and overall performance of the Tool Agent can be substantially compromised, leading to increased time and computational resource expenditures.

### D.3 MODEL SETTINGS

**Open-source Unified Models.** We employed four open-source unified models, namely Show-o, Mini-GPT5, Anole, CoMM-MiniGPT5 (Mini-GPT5 finetuned on CoMM) and SeedLlama-14B. All hyper-parameters are detailed as follows:

- **Show-o (Xie et al., 2024)** Guidance Scale: 1.75, generation timesteps: 18, temperature: 0.7, resolution: 256 × 256.
- **Mini-GPT5 (Zheng et al., 2023).** Image size: 224. temperature: 0.7, repetition penalty: 1.2, guidance scale: 7.5

<sup>9</sup><https://github.com/leoShen917/DreamMover>

1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051

**Task:**

You are a proficient planning agent tasked with writing a step-by-step plan for a ‘tool agent’ based on a multimodal input. Generate a strictly JSON-formatted plan, ensuring each step leads the tool agent towards a coherent final result.

**Key Instructions:**

- **Step Format:** Each Step contains a “Task” Category (Only three labels **Call\_tool**, **Caption** and **AddImage**), “Input\_text” and “Input\_images” fields and “Output” field. **AddImage** step only contains “Task” and “Input\_images” fields.
- **Control Tool Usage:** All the “Call\_tool” steps will be executed at the beginning in order, creating an orderly generated image list [<GEN\_0>, <GEN\_1>,....], this Task do not affect the final output and the structure because all the generated images will be add to the output in **AddImage** step.
- **Control Result Format:** Design the relationship between **Caption** step and **AddImage** step to fit the structural requirement. **Caption** step will add a text part to the final result, indicating a <gen\_text{ID}> placeholder in the structure, while **AddImage** step will add an image fragment to the final result, indicating a <gen\_img{ID}> placeholder in the structure. So you should design the order of **Caption** and **AddImage** steps to fit the given plan structural requirement. Do not plan several continuous “Caption” steps, which will be merged into one text fragment in the end.
- **Tool Guidance:** Each **Call\_tool** step’s text instruction should guide the tool agent on which tool to utilize. Use clear terms like “Generate one image”, “Edit the image”, “Generate a continuous video”, “Generate 3D views”, “Morphing from” as needed. Look for the Tool Box for more details.

**Tool Box:**

- **ImageGeneration:** Generates one image based on descriptive text only. No references allowed. ImageGeneration is expert in text-guided image generation, but it cannot see any input image.
- **ImageEdit:** Edits an input image based on a provided prompt and the image. Proficient at editing images like style transfer, attribute modification, and handling subtle changes. When the task requires a change in the input image, use this tool.
- **VideoGeneration:** Creates a sequence of images by input text and one input image guidance. returning several image screenshots of a continuous event. You have to mention how many images you want from this tool. VideoGeneration tool is expert in frame-contiguous and short-time-contiguous generation. Cannot Coexist with other tool in one plan and only can be used once in a task. Do not use this tool to handle subtle changes in image.
- **Video3DGeneration:** Returns multiple chosen views of a 3D object from a single input image. The chosen views should be clearly stated in the Call\_tool Input text in the format [Angle1: “Degree-left/right”, Angle2: ...]. Only Use this tool when the user wants to retrieve multiple different views of a 3D object or a 3D scene from a single image at once. Cannot Coexist with other tool in one plan and only can be used once in a task. You should provide a list of views you want to get in the input text.
- **ImageMorph:** Return four images of the process of morphing from the first image to the second image. Only Use this tool when the user wants to retrieve the morphing process between two images. Give really simple caption like: ‘a photo of [cls]’ in the instruction for tool agent to prompt the tool. Cannot Coexist with other tool in one plan and only can be used once in a task. You should provide two images in the input images.

Figure 34: Prompt - Agent planning prompt - Part 1

2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105

**Remember:**

Different tool have different input restrictions like any input image, any text input, input image number, ... , and can return different result. You are not doing the task yourself, think of the tool agent! ImageGeneration: input text only; ImageEdit: input text and one image; VideoGeneration: input text and one image; Fixed3DGeneration: input image; Free3DGeneration: input image; ImageMorph: input two images.

**Warning:**

- When your instruction for “Call\_tool” is aiming to call ‘VideoGeneration’, ‘3DGeneration’ or ‘ImageMorph’, remember these three tools can not coexist with all the other tools in one plan and can only be planned once for the whole task.
- Caption is always executed after all the images are generated, so you should plan any input image in the caption step if necessary.
- Video/3D Generation is less controllable by text so if you want to make text-controllable generation and edit, use ImageGeneration or ImageEdit.

**Considerations:**

- Use explicit terms to avoid ambiguity (e.g., “**Edit the image**” for edits, “**Generate an image**” for new creations).
- Each **Caption** instruction should ask the tool agent to describe every aspect of the image you want to get, instead of generating the caption yourself.
- Each **Call\_tool** instruction should be descriptive, focusing on the desired attributes, styles, and settings of the images.
- For sequential tasks, maintain consistency in characters, plot, and style across scenes by instruction.
- When comparing multiple images, ensure the original image is listed first. You should plan a comparison with two or more images in the caption step if the task indicates image comparison or contrast, like multi-perspectives contrast.
- The output should be strictly in **JSON format**, else the extraction will fail.
- **Output placeholders:** For original input images, use #image{ID}#. For all images to be outputted during the process, use <GEN\_ID> to replace them. For each step’s output, use <WAIT> as a placeholder. Check the example for more details.

**Note:**

If you want the tool agent to generate an image, your **Input\_text** cannot use pronouns like “**previous outline,**” “**original image,**” etc., to refer to any image. Instead, you should provide a detailed description of the image you want to refer to. For example: “**Generate an image of the right cat from the original image. The cat should be white and fluffy, curled up next to a toy.**” should be modified to “**Generate an image of a cat. The cat should be white and fluffy, curled up next to a toy.**”

**Must:** Your output JSON file must be in officially strict format; any deviation will cause the failure of the evaluation.

**Example Output:**[INSERT\_FORMAT]

Figure 35: Prompt - Agent planning prompt - Part 2

2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159

**Task Instructions for Refining Text Segments in Multimodal Content**

**Sequence and Placeholder Preservation**

- Maintain the exact sequence and number of text segments and image placeholders ('<boi><eoi>') as in the input. No new segments should be added between existing placeholders.

**Text Flow Improvements**

- Rephrase text segments for improved fluency and coherence. Remove redundancy and ensure smooth transitions between segments.

**Image-Text Consistency**

- Integrate references to the images naturally within the text without direct statements about the images. Describe or hint at image content.

**Error Handling**

- If any references to missing or problematic images occur, remove apologies or explanations to keep the narrative smooth.

**Key Instructions:** Output must match input in sequence and number of placeholders. Ensure coherent and engaging text. Eliminate redundancy and fix fragmented sentences.

**Fewshot Example:** [INSERT\_FORMAT]

Figure 36: Prompt - Agent refinement and verification prompt - Part 1

- **CoMM-MiniGPT5 (Chen et al., 2024d)**. Image size: 224. temperature: 0.7, repetition penalty: 1.2, guidance scale: 7.5
- **Anole (Chern et al., 2024)**. Text repetition penalty: 0.7 Text temperature: 0.5, Text top\_p: 0.8, Text greedy: False; Image guidance scale text: 2.0, Image guidance scale image: 1.2, Image temp: 0.5, Image top\_p: 0.7, Image greedy: False.
- **Seed-Llama 14B (Li et al., 2023b)**. Temperature: 0.7, num\_beams: 1, top\_p: 0.5, Image size: 224.

**Other Models.** We utilize three proprietary models, GPT-4o, Claude-3.5-Sonnet, and Gemini-1.5-pro-latest as multimodal preceptors and Flux-dev, SD3, SD2.1 as image generators, with detailed settings as follows:

- **Gemini-1.5-pro-latest (GeminiTeam, 2023)**. Temperature: 1, top\_p: 0.95
- **Claude-3.5-Sonnet (Anthropic, 2024)**. Temperature: 0.9
- **GPT-4o OpenAI (2024)**. Temperature: 1, top\_p: 1
- **Flux1-dev (Flux, 2024)**. Guidance scale: 3.5, num\_inference\_steps: 50
- **Stable Diffusion 3 (Esser et al., 2024)**. Guidance scale: 7.0, num\_inference\_steps: 28
- **Stable Diffusion 2.1 (Rombach et al., 2022)**. Guidance scale: 7.5, num\_inference\_steps: 25



2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213

Example of ISG-AGENT performance on Historical Event Analysis task

**Input:** What is the historical significance of the site or monument depicted in the picture `<image1>`? Provide detailed information about its history, including when its property, its cultural importance, and any relevant events associated with it. You should answer my question in text first and then generate four interleaved sections of text followed by images, where each image matches the text that comes before it. The last block must be image and every image are separated with text content. For example, `<gen_text1>`, `<gen_img1>`, `<gen_text2>`, `<gen_img2>`....



**Agent Response:**

Mount Fuji, an iconic symbol of Japan, stands majestically at 3,776 meters (12,388 feet) tall. Located on Honshu Island, this active stratovolcano has been revered in Japanese culture for centuries. Its near-perfect conical shape has inspired artists and poets, and it remains a popular destination for pilgrims and tourists alike. The mountain's beauty is enhanced by the surrounding landscape, with lakes, forests, and colorful flowers at its base, creating a picturesque scene that epitomizes the natural splendor of Japan.



Mount Fuji holds immense cultural significance in Japan. As one of the country's 'Three Holy Mountains', it has long been revered in Shinto religion. The mountain's iconic symmetrical cone shape has inspired countless artists and writers throughout history, becoming a symbol of Japan itself. Its image appears frequently in traditional ukiyo-e woodblock prints, most famously in Hokusai's 'Thirty-six Views of Mount Fuji' series. In literature, Mount Fuji features prominently in classical poetry and modern works alike, often symbolizing beauty, purity, and the spirit of Japan. Its cultural importance led to its designation as a UNESCO World Heritage Site in 2013, recognizing it as a place of artistic and spiritual inspiration.



It shows Mount Fuji in its iconic form, surrounded by cherry blossoms and a traditional pagoda. The Hoei Eruption of 1707-1708 was a significant event that temporarily altered Fuji's appearance and impacted surrounding areas. This eruption produced substantial ashfall, affecting agricultural productivity and daily life in nearby regions, including Edo (modern-day Tokyo). The eruption's effects were felt far and wide, with ash deposits reported as far as 100 km away from the volcano.



Mount Fuji's iconic silhouette and cultural significance make it a natural choice for UNESCO World Heritage status. Its perfect conical shape and fiery eruption in this image showcase why it's such a powerful symbol of Japan. As a popular climbing destination, thousands ascend its slopes each year to witness the sunrise from its summit. The surrounding area, with its scenic beauty and traditional buildings, attracts tourists year-round who come to admire the mountain from various vantage points and experience Japanese culture in its shadow.



Figure 37: Example of ISG-AGENT performing the Historical Event task

2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225  
2226  
2227  
2228  
2229  
2230  
2231  
2232  
2233  
2234  
2235  
2236  
2237  
2238  
2239  
2240  
2241  
2242  
2243  
2244  
2245  
2246  
2247  
2248  
2249  
2250  
2251  
2252  
2253  
2254  
2255  
2256  
2257  
2258  
2259  
2260  
2261  
2262  
2263  
2264  
2265  
2266  
2267

Example of ISG-AGENT performance on How-to Analysis task

**Input:** I will give you an this image. Based on it, please tell me next next 5 steps on How to make celery juice. Generate an image for each step, and write a brief description after each image. For example, `<gen_img1>`[description1], `<gen_img2>` [description2], `<gen_img3>` [description3], `<gen_img4>` [description4].



**Agent Response:**



In this step, the celery is being finely diced on a wooden cutting board using a sharp knife. The precise knife skills are evident as the celery is cut into small, uniform cubes. The vibrant green color of the celery contrasts beautifully with the warm tones of the wooden surface, highlighting the freshness of the ingredients.



Here, chopped celery is being added to a tall glass jar. A hand is seen dropping pieces of fresh, bright green celery stalks into the jar, which already contains some chopped celery. The clean kitchen background emphasizes the preparation of a healthy snack or recipe.



A modern blender is ready on the kitchen countertop, featuring a large, clear glass jar with a black lid securely in place. The stainless steel base with a black control panel adds a sleek touch to the kitchen setting, which includes a sink, potted plants, and natural light, creating an inviting atmosphere for blending.



The blender jar is now filled with a vibrant green liquid as the celery stalks are being blended. The swirling, frothy mixture is captured mid-action, with the green juice splashing against the sides of the container. The clear glass provides a perfect view of the blending process, set against a kitchen counter backdrop with additional ingredients.



Finally, the vibrant green liquid is being poured from a container into a clear glass. The smooth, slightly frothy texture of the juice is captured mid-stream, creating a dynamic and appetizing visual. The bright green color stands out against the plain, light-colored background, emphasizing the freshness and healthiness of the juice.

Figure 38: Example of ISG-AGENT performing the How-to task

2268  
2269  
2270  
2271  
2272  
2273  
2274  
2275  
2276  
2277  
2278  
2279  
2280  
2281  
2282  
2283  
2284  
2285  
2286  
2287  
2288  
2289  
2290  
2291  
2292  
2293  
2294  
2295  
2296  
2297  
2298  
2299  
2300  
2301  
2302  
2303  
2304  
2305  
2306  
2307  
2308  
2309  
2310  
2311  
2312  
2313  
2314  
2315  
2316  
2317  
2318  
2319  
2320  
2321

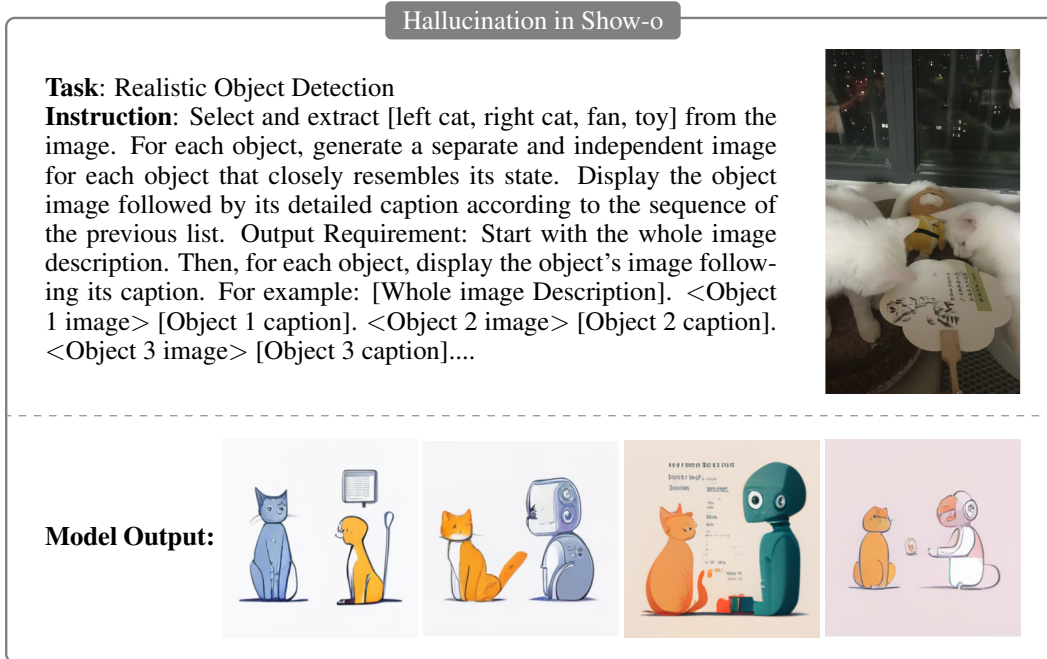


Figure 39: Hallucination in Show-o.

## E CASE STUDY

We provide examples of each task in this Section.

For Visual Story Telling, please refer to Figure 40, Figure 41 and Figure 42. For VQA with Image Generation, examples are shown in Figure 43 and Figure 44. For Temporal Prediction, please refer to Figure 45 and Figure 46. Examples of Image-text Complementation are shown in Figure 47 and Figure 48. For Style Transfer, examples are shown in Figure 49, Figure 50, Figure 51 and Figure 52. For Image Decomposition, examples are shown in Figure 53, Figure 54 and Figure 55. Examples of 3D Transformation are shown in Figure 56 and Figure 57. Examples of Progressive Image Transformation are shown in Figure 58, Figure 59 and Figure 60.

2322  
2323  
2324  
2325  
2326  
2327  
2328  
2329  
2330  
2331  
2332  
2333  
2334  
2335  
2336  
2337  
2338  
2339  
2340  
2341  
2342  
2343  
2344  
2345  
2346  
2347  
2348  
2349  
2350  
2351  
2352  
2353  
2354  
2355  
2356  
2357  
2358  
2359  
2360  
2361  
2362  
2363  
2364  
2365  
2366  
2367  
2368  
2369  
2370  
2371  
2372  
2373  
2374  
2375

Example of Image-based visual storytelling

**Input:** Based on <image1>, continue the story, presenting it through 4 new PNG images with descriptions. Ensure each text includes connecting phrases for smooth transitions. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].




**Golden answer:**



<image1> On a moonlit Halloween night, the Pink Panther, dressed as a vampire, leads his friends into a spooky adventure. The eerie glow of the full moon sets the perfect tone for their daring quest.



<image2> Their journey leads them to a mysterious mansion, filled with carved pumpkins and flickering candles. The Pink Panther cautiously enters, guiding his friends into the dimly lit room where shadows dance on the walls.



<image3> Deeper inside the mansion, the group discovers a hidden treasure chest. With excitement, the Pink Panther opens it to reveal sparkling jewels and gold, their eyes widening at the unexpected fortune.



<image4> Just as they celebrate their find, ghostly figures emerge from the shadows, and the mansion begins to shake. The Pink Panther quickly devises a plan, using his cape to distract the spirits, allowing the group to make a swift escape into the night.

Figure 40: Example of Image-based visual storytelling.

2376  
2377  
2378  
2379  
2380  
2381  
2382  
2383  
2384  
2385  
2386  
2387  
2388  
2389  
2390  
2391  
2392  
2393  
2394  
2395  
2396  
2397  
2398  
2399  
2400  
2401  
2402  
2403  
2404  
2405  
2406  
2407  
2408  
2409  
2410  
2411  
2412  
2413  
2414  
2415  
2416  
2417  
2418  
2419  
2420  
2421  
2422  
2423  
2424  
2425  
2426  
2427  
2428  
2429


### Example of Text-based visual storytelling

**Input:** I will tell you the captions of three pictures of this story: 1. The squirrels in the field of poppies are musicians, playing the piano and singing in harmony, as indicated by the musical note and piano in the background. 2. A musical instrument with a story. 3. Twelve young squirrels perform a dance routine on stage, their movements fluid and in harmony. Based on the text, continue the story, presenting it through 5 new PNG images with descriptions. Ensure each text includes connecting phrases for smooth transitions. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].

#### Golden answer:



<image1> On a brightly lit stage, squirrels enthusiastically juggle acorns, captivating the audience with their synchronized routine. Their movements are smooth, and the spotlight highlights their joyful performance, setting a lively tone for the rest of the show.



<image2> In the next act, a group of mice gather around a grand piano. A mouse in a red dress stands proudly while others sing in unison. Their melodic voices fill the theater, each mouse playing a unique part in creating a harmonious ensemble.



<image3> As the curtains draw back for the next scene, a shy mouse peeks from behind them. His nervous yet determined expression hints at his upcoming solo performance, adding suspense and excitement to the audience's anticipation.



<image4> The lights dim, and a quartet of mice in colorful outfits take center stage, showcasing a well-rehearsed dance routine. They twirl and leap, their tails swirling in rhythm, and the audience can't help but be enchanted by their delightful performance.



<image5> Backstage, two mice prepare for their big moment, anxiously awaiting their turn to shine. Their excitement is palpable as they practice their steps one last time, knowing that their grand finale will bring the entire show to a stunning conclusion.

Figure 41: Example of Text-based visual storytelling

2430  
2431  
2432  
2433  
2434  
2435  
2436  
2437  
2438  
2439  
2440  
2441  
2442  
2443  
2444  
2445  
2446  
2447  
2448  
2449  
2450  
2451  
2452  
2453  
2454  
2455  
2456  
2457  
2458  
2459  
2460  
2461  
2462  
2463  
2464  
2465  
2466  
2467  
2468  
2469  
2470  
2471  
2472  
2473  
2474  
2475  
2476  
2477  
2478  
2479  
2480  
2481  
2482  
2483

### Example of Image & text-based visual storytelling

**Input:** I'll tell you what happens next in the story: A robot and a button will go on an adventure. Based on **<image1>** and the provided text, continue the story, presenting it through 6 new PNG images with descriptions. Ensure each text includes connecting phrases for smooth transitions. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].



### Golden answer:



**<image1>** The little robot is happily marching forward, holding a large blue button as if it's his prized possession.




**<image2>** Suddenly, while swinging from a wire, the button slips from his hand and flies into the air. The robot looks startled.



**<image3>** The robot stands underneath a pedestrian traffic light, eagerly waiting for the green light to guide him forward.



**<image4>** The light turns red, and the robot looks disappointed as he realizes it's not time to cross yet.



**<image5>** As the robot prepares to step forward, he stares at the road ahead, still determined to retrieve his lost button.



**<image6>** A huge splash of water from a nearby passing vehicle drenches the robot, leaving him soaking wet as he stands on the crosswalk.

Figure 42: Example of Image & text-based visual storytelling

2484  
2485  
2486  
2487  
2488  
2489  
2490  
2491  
2492  
2493  
2494  
2495  
2496  
2497  
2498  
2499  
2500  
2501  
2502  
2503  
2504  
2505  
2506  
2507  
2508  
2509  
2510  
2511  
2512  
2513  
2514  
2515  
2516  
2517  
2518  
2519  
2520  
2521  
2522  
2523  
2524  
2525  
2526  
2527  
2528  
2529  
2530  
2531  
2532  
2533  
2534  
2535  
2536  
2537

### Object Q&A and Explanation

**Input:** What device is depicted in the picture <image1>? Provide detailed information to demonstrate its primary function, historical evolution, and the key steps to use it properly or any other relevant facts. You should answer my question in text first and then generate four interleaved images and text to thoroughly explain the device.



#### Golden answer:

The device depicted in the picture is a cassette tape, an analog magnetic tape format used for audio recording and playback. First introduced in the early 1960s by Philips, the cassette tape revolutionized personal audio by offering a compact, portable, and easy-to-use medium. Its primary function is to store sound data, which can be played back using a cassette player or recorder.


The cassette contains two reels of magnetic tape that move across a read-write head, which translates the recorded audio into sound waves. <image1>



To use a cassette tape, insert it into a compatible player, press play, and the tape will move through the device, producing sound. <image2>



Over time, cassette tapes were replaced by digital formats, but they remain a symbol of the 1980s and 1990s music culture, offering a sense of nostalgia. <image3>



While now largely obsolete, cassette tapes are still appreciated by collectors and audiophiles for their analog sound and the physical act of rewinding and flipping the tape. <image4>



Figure 43: Object Q&A and Explanation.

2538  
2539  
2540  
2541  
2542  
2543  
2544  
2545  
2546  
2547  
2548  
2549  
2550  
2551  
2552  
2553  
2554  
2555  
2556  
2557  
2558  
2559  
2560  
2561  
2562  
2563  
2564  
2565  
2566  
2567  
2568  
2569  
2570  
2571  
2572  
2573  
2574  
2575  
2576  
2577  
2578  
2579  
2580  
2581  
2582  
2583  
2584  
2585  
2586  
2587  
2588  
2589  
2590  
2591

### Example of Historical Event/Artifact Analysis

**Input:** What is the historical significance of the site or monument depicted in the picture <image1>? Provide detailed information about its history, including when it was built, its cultural importance, and any relevant events associated with it. You should answer my question in text first and then generate four interleaved images and text to thoroughly explain the site or monument.



### Golden answer:

The site depicted in the picture is Mount Fuji, Japan's highest peak and one of the country's most iconic natural landmarks. Standing at 3,776 meters (12,389 feet) tall, Mount Fuji is a stratovolcano that last erupted in 1707 during the Edo period.

The mountain's nearly symmetrical cone shape makes it a prominent feature of the Japanese landscape and a symbol of beauty and tranquility. <image1>



Mount Fuji holds profound cultural and spiritual significance in Japan. It is considered a sacred site in Shinto, the indigenous religion of Japan, and has been a subject of veneration and pilgrimage for centuries. The mountain is frequently depicted in Japanese art and literature, including famous woodblock prints by Katsushika Hokusai and Utagawa Hiroshige. <image2>



The mountain is also a popular destination for climbers and tourists. The official climbing season is from early July to early September, and thousands of people ascend the mountain each year to experience its scenic beauty and spiritual significance. <image3>



As a UNESCO World Heritage site, Mount Fuji is celebrated for its natural beauty and its role in Japanese culture and history, making it a symbol of national pride and a focal point of both natural and cultural heritage. <image4>



Figure 44: Example of Historical Event/Artifact Analysis.

### Example of Real World Simulation

**Input:** I will give you a picture of a vegetable spiralizer cutting a squash into spirals <image1>. Please use a combination of 4 images and text to show what will happen to this squash. For example, [whole description] {1st image}, {2nd image}, {3rd image}.



### Golden answer:

The vegetable spiralizer begins cutting the squash into long spirals. As the handle is turned, the squash is pushed against the blade, creating thin spirals. The squash continues to spiralize, and the length of the squash gradually reduces. The spirals form a continuous, long string. <image1> <image2> <image3> <image4>



Figure 45: Example of Real World Simulation.



2592  
2593  
2594  
2595  
2596  
2597  
2598  
2599  
2600  
2601  
2602  
2603  
2604  
2605  
2606  
2607  
2608  
2609  
2610  
2611  
2612  
2613  
2614  
2615  
2616  
2617  
2618  
2619  
2620  
2621  
2622  
2623  
2624  
2625  
2626  
2627  
2628  
2629  
2630  
2631  
2632  
2633  
2634  
2635  
2636  
2637  
2638  
2639  
2640  
2641  
2642  
2643  
2644  
2645

### Example of Painting Process Generation


**Input:** I will give you a painting <image1>. Please tell me how to draw this image in 5 steps using a combination of images and text. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].




#### Golden answer:



<image1> Step 1: Start with an underpainting or basic sketch to block in the shapes and form of the face.



<image2> Step 2: Add base skin tones and block in large areas of light and shadow.



<image3> Step 3: Gradually refine the shapes and add details to features like the eyes, nose, and mouth.



<image4> Step 4: Work on smoothing transitions and adding further detail, focusing on depth.



<image5> Step 5: Finalize the painting by refining edges, adding highlights, and introducing a subtle background.

Figure 46: Example of Painting Process Generation.

2646  
2647  
2648  
2649  
2650  
2651  
2652  
2653  
2654  
2655  
2656  
2657  
2658  
2659  
2660  
2661  
2662  
2663  
2664  
2665  
2666  
2667  
2668  
2669  
2670  
2671  
2672  
2673  
2674  
2675  
2676  
2677  
2678  
2679  
2680  
2681  
2682  
2683  
2684  
2685  
2686  
2687  
2688  
2689  
2690  
2691  
2692  
2693  
2694  
2695  
2696  
2697  
2698  
2699

#### Example of HowTo

**Input:** Please tell me 5 steps on How to shave. Generate an image for each step, and write a brief description after each image. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].

#### Golden answer:



<image1> First, keeping your skin moisturized can effectively reduce cuts, nicks, and irritation during shaving. We recommend shaving immediately after a shower or while in the shower. Keeping the skin moist softens your facial hair, allowing the razor to glide more smoothly.



<image2> Apply shaving cream or shaving foam - lather it up and apply evenly to moisturize the hair, allowing the razor to glide smoothly and effectively reducing irritation, such as razor burn, during shaving.



<image3> Gently glide the razor across your face, softly removing the beard. Rinse your face with clean water and pat it dry.



<image4> Apply an aftershave moisturizer to replenish moisture and soothe the skin.



<image5> You finished shaving.

Figure 47: Example of HowTo.

2700  
2701  
2702  
2703  
2704  
2705  
2706  
2707  
2708  
2709  
2710  
2711  
2712  
2713  
2714  
2715  
2716  
2717  
2718  
2719  
2720  
2721  
2722  
2723  
2724  
2725  
2726  
2727  
2728  
2729  
2730  
2731  
2732  
2733  
2734  
2735  
2736  
2737  
2738  
2739  
2740  
2741  
2742  
2743  
2744  
2745  
2746  
2747  
2748  
2749  
2750  
2751  
2752  
2753

### Example of Scientific Phenomenon Explanation

**Input:** How is the phenomenon in the picture <image1> scientifically explained? Provide a detailed explanation of the principles behind the phenomenon, including relevant knowledge. You should answer my question in text first and then generate four interleaved images and text to thoroughly explain the phenomenon.




#### Golden answer:

The phenomenon in the picture is a volcanic eruption, which occurs when magma from beneath the Earth's crust is expelled to the surface.


This eruption is often characterized by the expulsion of lava, ash, and gases. <image1>



The magma originates from the mantle, where it melts due to high pressure and temperature. As magma rises through the Earth's crust, it collects in a magma chamber beneath the volcano. When pressure in the chamber exceeds the strength of the surrounding rock, an eruption occurs. <image2>



During the eruption, lava flows from the volcano, while volcanic ash and gases are ejected into the atmosphere. The composition of lava can vary, influencing the eruption style, with basaltic lava producing relatively gentle eruptions and more viscous andesitic or rhyolitic lavas leading to explosive eruptions. <image3>



Volcanic eruptions can also create new landforms such as volcanic cones or calderas, shaped by the accumulation of erupted materials. <image4>




Figure 48: Example of Scientific Phenomenon Explanation.

2754  
2755  
2756  
2757  
2758  
2759  
2760  
2761  
2762  
2763  
2764  
2765  
2766  
2767  
2768  
2769  
2770  
2771  
2772  
2773  
2774  
2775  
2776  
2777  
2778  
2779  
2780  
2781  
2782  
2783  
2784  
2785  
2786  
2787  
2788  
2789  
2790  
2791  
2792  
2793  
2794  
2795  
2796  
2797  
2798  
2799  
2800  
2801  
2802  
2803  
2804  
2805  
2806  
2807


Example of Art Style Transfer

**Input:** I will give you an image <image1>. Using this image, create 3 versions of this image in 3 different artistic styles in order: Dreamweave, Dapple, and Watercolor. Focus on transforming the whole image style while maintaining the subject's features. For each image, provide a brief description of the style. Descriptions should be put after each image. For example, {1st image} [style1], {2nd image} [style2], {3rd image} [style3].


**Golden answer:**



<image1> is in Dreamweave style, characterized by a surreal, vibrant, and slightly distorted color pattern that blends colors fluidly, creating an almost dream-like effect.



<image2> is in Dapple style, which features a pointillism-like texture with overlapping dots or small patches of color that create a textured and dynamic look.



<image3> is in Watercolor style, distinguished by soft, flowing colors with blended edges that mimic the translucent and layered appearance typical of watercolor paintings.





Figure 49: Example of Art Style Transfer.


Example of Scene Attribute Transfer

**Input:** Given a photograph <image1>, generate 4 images that transform this scene across 4 following conditions in order: foggy, dusk, cloudy, night. Please provide a brief text description explaining the changes made. Descriptions should be put after each image. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].


**Golden answer:**




<image1> shows a fog-covered city with reduced visibility and dimmed lighting compared to the clear, sunny condition in the original image.



<image2> shows a twilight scene with the city lights starting to illuminate and a darker sky.



<image3> displays a partially overcast sky with clouds covering much of the skyline, creating a gloomy ambiance.



<image4> features a fully dark environment with city lights prominently visible, contrasting with the bright daytime in the original image.





Figure 50: Example of Scene Attribute Transfer.

2808  
2809  
2810  
2811  
2812  
2813  
2814  
2815  
2816  
2817  
2818  
2819  
2820  
2821  
2822  
2823  
2824  
2825  
2826  
2827  
2828  
2829  
2830  
2831  
2832  
2833  
2834  
2835  
2836  
2837  
2838  
2839  
2840  
2841  
2842  
2843  
2844  
2845  
2846  
2847  
2848  
2849  
2850  
2851  
2852  
2853  
2854  
2855  
2856  
2857  
2858  
2859  
2860  
2861

### Example of Photo Variation

**Input:** Given a photograph `<image1>`, create 4 new images by applying the following adjustments in order: reduced brightness and exposure; reduced brightness and increased contrast; decreased brightness; greener tone. Please provide a brief text description explaining the changes made. Descriptions should be put after each image. For example, `{1st image} [description1]`, `{2nd image} [description2]`, `{3rd image} [description3]`.



### Golden answer:



`<image1>` has reduced brightness and exposure, making the overall scene darker.



`<image2>` has reduced brightness and increased contrast, giving it a more pronounced difference between light and dark areas.



`<image3>` has decreased brightness, resulting in a more subdued and dim appearance.




`<image4>` has a greener tone, altering the color balance to emphasize green hues in the scene.

Figure 51: Example of Photo Variation.


2862  
2863  
2864  
2865  
2866  
2867  
2868  
2869  
2870  
2871  
2872  
2873  
2874  
2875  
2876  
2877  
2878  
2879  
2880  
2881  
2882  
2883  
2884  
2885  
2886  
2887  
2888  
2889  
2890  
2891  
2892  
2893  
2894  
2895  
2896  
2897  
2898  
2899  
2900  
2901  
2902  
2903  
2904  
2905  
2906  
2907  
2908  
2909  
2910  
2911  
2912  
2913  
2914  
2915

**Example of Portrait Variation**


**Input:** Given input portrait photograph <image1>, create 4 new images by applying the following adjustments in order: lightly better lighting and contrast; more serious expression and a slightly different angle; with eyes closed or looking down; a slightly different facial expression and head tilt. Please provide a brief text description explaining the changes made. Descriptions should be put after each image. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].




**Golden answer:**




<image1> appears to have slightly better lighting and contrast.



<image2> shows the subject with a more serious expression and a slightly different angle.



<image3> depicts the subject with his eyes closed or looking down.



<image4> is with a slightly different facial expression and head tilt.

Figure 52: Example of Portrait Variation.

2916  
2917  
2918  
2919  
2920  
2921  
2922  
2923  
2924  
2925  
2926  
2927  
2928  
2929  
2930  
2931  
2932  
2933  
2934  
2935  
2936  
2937  
2938  
2939  
2940  
2941  
2942  
2943  
2944  
2945  
2946  
2947  
2948  
2949  
2950  
2951  
2952  
2953  
2954  
2955  
2956  
2957  
2958  
2959  
2960  
2961  
2962  
2963  
2964  
2965  
2966  
2967  
2968  
2969

### Example of Realistic Image Decomposition

**Input:** Select and extract grenade, flashlight, bullet, dog-tag, compass, badge from the image <image1>. If capable, Segment the object directly from the image, else generate a similar one. Output the object image and its detailed caption according to the sequence of previous list. Output Requirement: Start with the whole image description. Then, for each object, display the object's image following its caption. When multiple objects interact, describe them together with conjunctions. For example: [Whole image description] {1st object's image} [description1], {2nd object's image} [description2], {3rd object's image} [description3].



**Golden answer:** A collection of military objects laid out on a wooden surface.



A dark green hand grenade <image2> with a metallic safety pin is placed in the upper left corner.



A black and green flashlight grip <image3> with a textured surface lies beside the grenade.



Three brass bullets <image4> are lined up on the right, each with a copper tip.



Two dog tags <image5> on a metal chain are positioned in the upper right corner.



A green military compass <image6> with a transparent cover is displayed near the center.



A round badge <image7> with a blue background and a yellow trident symbol is positioned at the bottom left.

Figure 53: Example of Realistic Image Decomposition.

2970  
2971  
2972  
2973  
2974  
2975  
2976  
2977  
2978  
2979  
2980  
2981  
2982  
2983  
2984  
2985  
2986  
2987  
2988  
2989  
2990  
2991  
2992  
2993  
2994  
2995  
2996  
2997  
2998  
2999  
3000  
3001  
3002  
3003  
3004  
3005  
3006  
3007  
3008  
3009  
3010  
3011  
3012  
3013  
3014  
3015  
3016  
3017  
3018  
3019  
3020  
3021  
3022  
3023

### Example of Synthetic Image Decomposition


**Input:** Select and extract bread, milk, egg, rice from the image <image1>. If capable, Segment the object directly from the image, else generate a similar one. Output the object image and its detailed caption according to the sequence of previous list. Output Requirement: Start with the whole image description. Then, for each object, display the object's image following its caption. When multiple objects interact, describe them together with conjunctions. For example: [Whole image description] {1st object's image} [description1], {2nd object's image} [description2], {3rd object's image} [description3].



**Golden answer:** A simple meal tray featuring bread, milk, egg, and rice.



A loaf of brown bread <image1> with two light stripes is placed on the tray.



A carton of milk <image2> sits beside the bread, its blue and white packaging standing out.



A fried egg <image3> with a bright yellow yolk rests on a section of the tray.



A ball of white rice <image4> is placed next to the egg, completing the meal.

Figure 54: Example of Synthetic Image Decomposition.



3024  
3025  
3026  
3027  
3028  
3029  
3030  
3031  
3032  
3033  
3034  
3035  
3036  
3037  
3038  
3039  
3040  
3041  
3042  
3043  
3044  
3045  
3046  
3047  
3048  
3049  
3050  
3051  
3052  
3053  
3054  
3055  
3056  
3057  
3058  
3059  
3060  
3061  
3062  
3063  
3064  
3065  
3066  
3067  
3068  
3069  
3070  
3071  
3072  
3073  
3074  
3075  
3076  
3077

#### Example of Semantic Decomposition

**Input:** Decompose the image <image1> into left-view, mid-view, right-view regions base on the image composition. If capable, Segment the region directly from the image, else generate a similar one. Display the generated region image and its detailed caption according to the sequence of previous list. Output Requirement: Start with the whole image description. Then, for each region, display the object's image following its caption. For example: [Whole image description] {1st region's image} [description1], {2nd region's image} [description2], {3rd region's image} [description3].



**Golden answer:** This image showcases a church interior, richly decorated with religious art.



The left view <image1> features a painting that illustrates the Baptism of Christ, with angels in attendance, set against a backdrop of dramatic clouds and golden light, framed by dark marbled columns.

The mid-view <image2> is dominated by the Crucifixion scene, where Christ is centered on the cross, flanked by sorrowful figures under a stormy sky, emphasizing the solemnity of the moment.

The right view <image3> depicts the Ascension of Christ, with apostles gazing upwards as Christ rises, surrounded by a halo of light, conveying a sense of divine transcendence.

Figure 55: Example of Semantic Decomposition.

3078  
 3079  
 3080  
 3081  
 3082  
 3083  
 3084  
 3085  
 3086  
 3087  
 3088  
 3089  
 3090  
 3091  
 3092  
 3093  
 3094  
 3095  
 3096  
 3097  
 3098  
 3099  
 3100  
 3101  
 3102  
 3103  
 3104  
 3105  
 3106  
 3107  
 3108  
 3109  
 3110  
 3111  
 3112  
 3113  
 3114  
 3115  
 3116  
 3117  
 3118  
 3119  
 3120  
 3121  
 3122  
 3123  
 3124  
 3125  
 3126  
 3127  
 3128  
 3129  
 3130  
 3131

### Example of Multi-view Scene Generation

**Input:** Here is an image <image1> of an object. based on this image, create a series of 4 images showing views from following perspectives in order : right 30, right 15, left 45, left 60. For each image, provide a brief description of the angle. Descriptions should be put after each image. Your response should follow this structure: *30 degrees right: {1st image}, 15 degrees right: {2nd image}, 45 degrees left: {3rd image}, 60 degrees left: {4th image}*.



### Golden answer:

The perspective of the object from 30 degrees right: <image1>

The perspective of the object from 15 degrees right: <image2>

The perspective of the object from 45 degrees left: <image3>

The perspective of the object from 60 degrees left: <image4>




Figure 56: Example of Multi-view Scene Generation.

3132  
 3133  
 3134  
 3135  
 3136  
 3137  
 3138  
 3139  
 3140  
 3141  
 3142  
 3143  
 3144  
 3145  
 3146  
 3147  
 3148  
 3149  
 3150  
 3151  
 3152  
 3153  
 3154  
 3155  
 3156  
 3157  
 3158  
 3159  
 3160  
 3161  
 3162  
 3163  
 3164  
 3165  
 3166  
 3167  
 3168  
 3169  
 3170  
 3171  
 3172  
 3173  
 3174  
 3175  
 3176  
 3177  
 3178  
 3179  
 3180  
 3181  
 3182  
 3183  
 3184  
 3185

**Example of Multi-angle Object Generation**


**Input:** Here is an image <image1> of an object. Use this image as the reference angle and generate four additional images of the object from the following angles: 60 degrees left, 30 degrees left, 30 degrees right, and 60 degrees right. Your response should follow this structure: *60 degrees left: {1st image}, 30 degrees left: {2nd image}, 30 degrees right: {3rd image}, 60 degrees right: {4th image}*.





---

**Golden answer:**


The perspective of the object from 60 degrees left: <image1>



The perspective of the object from 30 degrees left: <image2>



The perspective of the object from 30 degrees right: <image3>



The perspective of the object from 60 degrees right: <image4>




Figure 57: Example of Multi-angle Object Generation

3186  
3187  
3188  
3189  
3190  
3191  
3192  
3193  
3194  
3195  
3196  
3197  
3198  
3199  
3200  
3201  
3202  
3203  
3204  
3205  
3206  
3207  
3208  
3209  
3210  
3211  
3212  
3213  
3214  
3215  
3216  
3217  
3218  
3219  
3220  
3221  
3222  
3223  
3224  
3225  
3226  
3227  
3228  
3229  
3230  
3231  
3232  
3233  
3234  
3235  
3236  
3237  
3238  
3239

### Example of Text-guided Animation

**Input:** Increase the number of pancake layers from **<image1>**, making the stack taller. Reduce the amount of toppings on the pancakes, keeping the overall composition the same but with a more minimal topping arrangement. **<image1>** represents the initial state, and the provided text describes the changes needed. Create a series of 5 PNG images that gradually transition from the initial state to the final state. Please provide a brief text description explaining the changes made. Descriptions should be put after each image. For example: *{second stage} [description1], ... {final stage} [description5]*. Ensure that the transitions are natural and progressively illustrate the changes between states.



### Golden answer:

At the second stage **<image1>**, the stack of pancakes appears slightly taller with an added layer. The toppings remain similar, but the overall arrangement looks a bit more minimal, maintaining the berries and syrup.



In the third stage **<image2>**, the pancake stack continues to grow taller with another added layer. The toppings have been reduced further, with fewer berries on top, enhancing the minimalistic appearance.



The fourth stage **<image3>** shows an even taller stack with another layer added. The quantity of berries decreases slightly, keeping the minimal topping arrangement consistent.



At the fifth stage **<image4>**, the pancake stack continues to rise with an additional layer. The berries appear to be fewer, maintaining a minimal topping display.




At the final stage **<image5>**, the pancake stack reaches its maximum height with the tallest stack yet. The toppings are further minimized, with just a few berries and a hint of syrup, achieving the intended minimalistic composition.




Figure 58: Example of Text-guided Animation

3240  
3241  
3242  
3243  
3244  
3245  
3246  
3247  
3248  
3249  
3250  
3251  
3252  
3253  
3254  
3255  
3256  
3257  
3258  
3259  
3260  
3261  
3262  
3263  
3264  
3265  
3266  
3267  
3268  
3269  
3270  
3271  
3272  
3273  
3274  
3275  
3276  
3277  
3278  
3279  
3280  
3281  
3282  
3283  
3284  
3285  
3286  
3287  
3288  
3289  
3290  
3291  
3292  
3293


### Example of Image-guided Animation




**Input:** <image1> (left) represents the initial state, and <image2> (right) represents the final desired state. Create a series of 4 PNG images that gradually morph from the initial state to the final state. Include a brief text description after each image explaining the changes made in each step. For example: {second stage} [description1]. ... {penultimate stage} [description4]. Ensure that the transitions are natural and progressively illustrate the changes between states.



#### Golden answer:




At the second stage <image1>, the fur appears slightly longer and the color pattern remains consistent, though the overall form of the dog seems slightly larger and the background remains unchanged.



In the third stage <image2>, the dog's ears appear to be lengthening slightly, and subtle changes in the shading on the fur give it a slightly fuller appearance, while the background maintains its consistency.



In the fourth stage <image3>, there is a noticeable increase in the length and volume of the dog's fur, with a more defined transition in coloration on the coat. The background starts to blend more with the dog's fur tones, creating a more cohesive look.



At the penultimate stage <image4>, the dog's fur has grown significantly longer and thicker, resembling more closely that of a Border Collie. The overall composition of colors on the coat reflects this transformation, and the background has transitioned to an outdoor scene, enhancing the natural look of the dog.

Figure 59: Example of Image-guided Animation

3294  
3295  
3296  
3297  
3298  
3299  
3300  
3301  
3302  
3303  
3304  
3305  
3306  
3307  
3308  
3309  
3310  
3311  
3312  
3313  
3314  
3315  
3316  
3317  
3318  
3319  
3320  
3321  
3322  
3323  
3324  
3325  
3326  
3327  
3328  
3329  
3330  
3331  
3332  
3333  
3334  
3335  
3336  
3337  
3338  
3339  
3340  
3341  
3342  
3343  
3344  
3345  
3346  
3347

### Example of Attribute-guided Image Generation

**Input:** I will give you an image of a man sitting in a room <image1>. Please show me the process of the man becoming increasingly poor, using a combination of 4 images and text. For example, {1st image} [description1], {2nd image} [description2], {3rd image} [description3].



### Golden answer:



<image1> The man is sitting in a room that appears somewhat cluttered but still functional. His clothes are clean, and the room, although slightly messy, is in relatively good condition



<image2> The man's clothes appear worn, and the room is becoming more disorganized, with more clutter accumulating around him.



<image3> The man is visibly more disheveled, and the room has significantly deteriorated, with trash and debris scattered across the floor.



<image4> The man looks exhausted, his clothes are tattered, and the room is in a state of disrepair, filled with broken furniture and debris, reflecting deep poverty.

Figure 60: Example of Attribute-guided Image Generation