

---

# LIVEBENCH: A CHALLENGING, CONTAMINATION-LIMITED LLM BENCHMARK

**Anonymous authors**

Paper under double-blind review

## ABSTRACT

Test set contamination, wherein test data from a benchmark ends up in a newer model’s training set, is a well-documented obstacle for fair LLM evaluation and can quickly render benchmarks obsolete. To mitigate this, many recent benchmarks crowdsource new prompts and evaluations from human or LLM judges; however, these can introduce significant biases, and break down when scoring hard questions. In this work, we introduce a new benchmark for LLMs designed to be [resistant](#) to both test set contamination and the pitfalls of LLM judging and human crowdsourcing. We release `LiveBench`, the first benchmark that (1) contains frequently-updated questions from recent information sources, (2) scores answers automatically according to objective ground-truth values, and (3) contains a wide variety of challenging tasks, spanning math, coding, reasoning, language, instruction following, and data analysis. To achieve this, `LiveBench` contains questions that are based on recently-released math competitions, arXiv papers, news articles, and datasets, and it contains harder, [contamination-limited](#) versions of tasks from previous benchmarks such as Big-Bench Hard, AMPS, and IFEval. We evaluate many prominent closed-source models, as well as dozens of open-source models ranging from 0.5B to 405B in size. `LiveBench` is difficult, with top models achieving below 70% accuracy. We release all questions, code, and model answers. Questions are added and updated on a monthly basis, and we release new tasks and harder versions of tasks over time so that `LiveBench` can distinguish between the capabilities of LLMs as they improve in the future. We welcome community engagement and collaboration for expanding the benchmark tasks and models.

## 1 INTRODUCTION

In recent years, as large language models (LLMs) have risen in prominence, it has become increasingly clear that traditional machine learning benchmark frameworks are no longer sufficient to evaluate new models. Benchmarks are typically published on the internet, and most modern LLMs include large swaths of the internet in their training data. If the LLM has seen the questions of a benchmark during training, its performance on that benchmark will be artificially inflated ([referred to as “test set contamination”](#)) (Roberts et al., 2024; Dong et al., 2024; Deng et al., 2023; Golchin & Surdeanu, 2023b), hence making many LLM benchmarks unreliable. Recent evidence of test set contamination includes the observation that LLMs’ performance on Codeforces plummet after the training cutoff date of the LLM (Roberts et al., 2024; Jain et al., 2024), and before the cutoff date, performance is highly correlated with the number of times the problem appears on GitHub (Roberts et al., 2024). Similarly, a recent hand-crafted variant of the established math dataset, GSM8K, shows evidence that several models have overfit to this benchmark (Zhang et al., 2024; Cobbe et al., 2021).

To lessen dataset contamination, benchmarks using LLM or human prompting and judging have become increasingly popular (Jain et al., 2024; Chiang et al., 2024; Zheng et al., 2024; Li et al., 2024). However, using these techniques comes with significant downsides. While LLM judges have multiple advantages, such as their speed and ability to evaluate open-ended questions, they are prone to making mistakes and can have several biases (Li et al., 2024). Furthermore, LLMs often favor their own answers over other LLMs, and LLMs favor more verbose answers (Li et al., 2024; Dubois et al., 2024; Li et al., 2023b). Additionally, using humans to provide evaluations of LLMs can inject biases such as formatting of the output and the tone of the writing (Chiang et al., 2024). Using humans to generate questions also presents limitations. Human participants might not ask diverse questions, may

054  
055  
056  
057  
058  
059  
060  
061  
062  
063  
064  
065  
066  
067  
068  
069  
070  
071  
072  
073  
074  
075  
076  
077  
078  
079  
080  
081  
082  
083  
084  
085  
086  
087  
088  
089  
090  
091  
092  
093  
094  
095  
096  
097  
098  
099  
100  
101  
102  
103  
104  
105  
106  
107

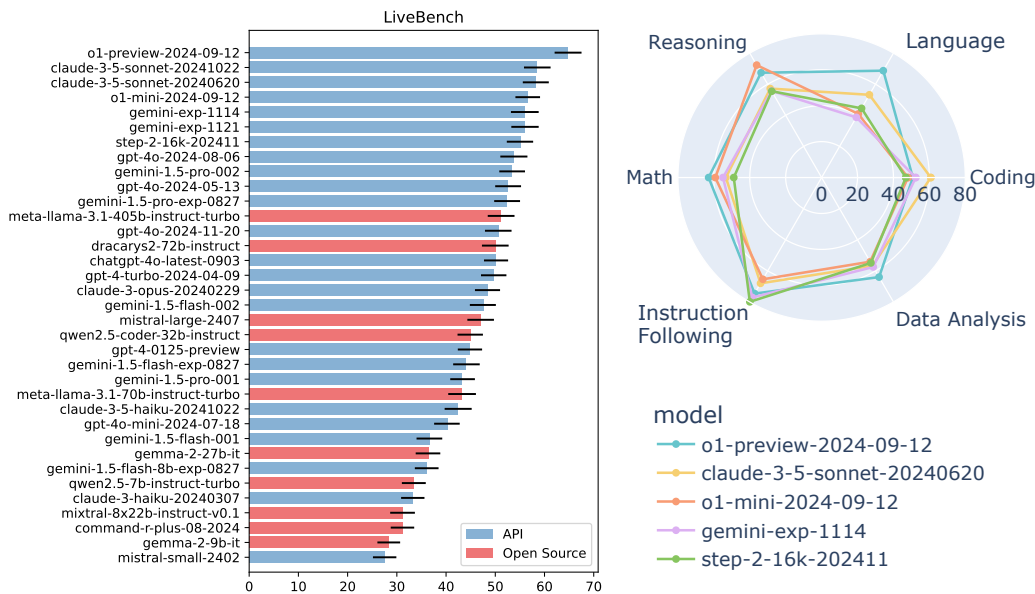


Figure 1: Left: results on LiveBench for all models, showing 95% bootstrap confidence intervals. Right: a radar plot for select models across LiveBench’s six categories demonstrating the that ordering of top models varies between each category.

favor certain topics that do not probe a model’s general capabilities, or may construct their prompts poorly (Zheng et al., 2024).

In this work, we introduce a framework for benchmarking LLMs designed to minimize both test set contamination and the pitfalls of LLM judging and human crowdsourcing. We use this framework to create LiveBench, the first benchmark with these three desiderata: (1) LiveBench contains frequently-updated questions based on recent information sources; (2) LiveBench is scored automatically according to the objective ground truth without the use of an LLM judge; and (3) LiveBench questions are drawn from a diverse set of six categories. We ensure (2) by only including questions that have an objectively correct answer. LiveBench questions are *difficult*: no current model achieves higher than 70% accuracy. Questions are added and updated on a monthly basis, and we release new tasks and harder versions of tasks over time so that LiveBench can distinguish among the capabilities of LLMs as they improve in the future.

**Overview of tasks.** LiveBench currently consists of 18 tasks across 6 categories: math, coding, reasoning, language, instruction following, and data analysis. Each task falls into one of two types: (1) tasks which use an information source for their questions, e.g., data analysis questions based on recent Kaggle datasets, or fixing typos in recent arXiv abstracts; and (2) tasks which are more challenging or diverse versions of existing benchmark tasks, e.g., from Big-Bench Hard (Suzgun et al., 2023) or IFEval (Zhou et al., 2023a). The categories and tasks included in LiveBench are:

- **Math:** modified questions based on high school math competitions from the past 11 months, as well as harder versions of AMPS questions (Hendrycks et al., 2021)
- **Coding:** code generation questions from recent Leetcode and AtCoder questions (via LiveCodeBench (Jain et al., 2024)), as well as a novel code completion task
- **Reasoning:** a harder version of Web of Lies from Big-Bench Hard (Suzgun et al., 2023), and novel Zebra Puzzles (e.g., (Jeremy, 2009)) and spatial reasoning questions
- **Language Comprehension:** Connections word puzzles, a typo-fixing task, and a movie synopsis unscrambling task for recent movies on IMDb and Wikipedia
- **Instruction Following:** four tasks to paraphrase, simplify, summarize, or generate stories about recent new articles from The Guardian (Guardian Media Group, 1821), subject to one or more instructions such as word limits or incorporating specific elements in the response

- 
- **Data Analysis:** three tasks using recent datasets from Kaggle and Socrata, specifically, table reformatting (among JSON, JSONL, Markdown, CSV, TSV, and HTML), predicting which columns can be used to join two tables, and predicting the correct column type annotation

We evaluate dozens of models, including proprietary models as well as open-source models with sizes ranging from 0.5B to 8x22B. We release all questions, code, and model answers, and we welcome community engagement and collaboration. Our codebase is available at <https://anonymous.4open.science/r/LiveBench>.

## 2 LIVEBENCH DESCRIPTION

In this section, we introduce `LiveBench`. It currently has six categories: math, coding, reasoning, data analysis, instruction following, and language comprehension. Categories are diverse with two to four tasks per problem. Each task either includes recent information sources (such as very recent news articles, movie synopses, or datasets) or is a more challenging, more diverse version of an existing benchmark task.

Each task is designed to have 40-100 questions which span a range of difficulty, from easy to very challenging, while loosely aiming for an overall 30-70% success rate on the top models for each task. Prompts are tailored for each category and task but typically include the following: zero-shot chain of thought (Kojima et al., 2022; Wei et al., 2022), asking the model to make its best guess if it does not know the answer, and asking the LLM to output its final answer in a way that is easy to parse, such as in XML tags or in `**double asterisks**`. We also acknowledge that parsing answers in this way requires some degree of instruction following, and we address this in Appendix A.4. In the following sections, we give a summary of each task from each category. See Appendix A.3 for additional details.

### 2.1 MATH CATEGORY

Evaluating the mathematical abilities of LLMs has been one of the cornerstones of recent research in LLMs, featuring prominently in many releases and reports (Reid et al., 2024; OpenAI, 2023; Bubeck et al., 2023). Our benchmark includes math questions of three types: questions modified from recent high school math competitions, fill-in-the-blank questions from recent olympiad competitions, and questions from our new, harder version of the AMPS dataset (Hendrycks et al., 2021).

Our first two math tasks, `Competitions` and `Olympiad`, are based on expert human-designed math problems that offer a wide variety in terms of problem type and solution technique. In `Competitions`, we include questions from AMC12 2023, SMC 2023, and AIME 2024 modifying the prose and the answer order; in `Olympiad`, we include questions based on USAMO 2024 and IMO 2024, in which the task is to rearrange masked out equations from the solution into the correct order. These questions test problem solving with algebra, combinatorics, geometry, logic, number theory, probability, and other secondary school math topics (Faires & Wells, 2022).

Finally, we release synthetically generated math questions in the `AMPS_Hard` task. This task is inspired by the math question generation used to create the MATH and AMPS datasets (Hendrycks et al., 2021). We generate harder questions by drawing random primitives, using a larger and more challenging distribution than AMPS across 10 of the hardest tasks within AMPS.

### 2.2 CODING CATEGORY

The coding ability of LLMs is one of the most widely studied and sought-after skills for LLMs (Mnih et al., 2015; Jain et al., 2024; Li et al., 2023a). We include two coding tasks in `LiveBench`: a modified version of the code generation task from `LiveCodeBench` (LCB) (Jain et al., 2024), and a novel code completion task combining LCB problems with partial solutions collected from GitHub.

The `LCB_Generation` assesses a model’s ability to parse a competition coding question statement and write a correct answer. We include 78 questions from `LiveCodeBench` (Jain et al., 2024) which has several tasks to assess the coding capabilities of large language models.

The Completion task specifically focuses on the ability of models to complete a partially correct solution—assessing whether a model can parse the question, identify the function of the existing code, and determine how to complete it. We use LeetCode easy, medium, and hard problems from LiveCodeBench’s (Jain et al., 2024) April 2024 release, combined with matching solutions from <https://github.com/kamyu104/LeetCode-Solutions>, omitting the last 15-70% of each solution and asking the LLM to complete the solution.

### 2.3 REASONING CATEGORY

The reasoning ability of large language models is another highly benchmarked and analyzed skill of LLMs (Wei et al., 2022; Suzgun et al., 2023; Yao et al., 2024). In LiveBench, we include three reasoning tasks: our harder version of a task from Big-Bench Hard (Suzgun et al., 2023), Zebra puzzles, and spatial reasoning questions.

Web of Lies v2 is an advancement of the similarly named task included in Big-Bench (bench authors, 2023) and Big-Bench Hard (Suzgun et al., 2023). The task is to evaluate the truth value of a random Boolean function expressed as a natural-language word problem. We create new, significantly harder questions by including additional deductive components and several types of red herrings. Next, we include spatial reasoning questions. This set of 50 handwritten questions tests a model’s ability to make deductions about intersections and orientations of common 2D and 3D shapes.

Finally, we include Zebra Puzzles, a well-known reasoning task (Jeremy, 2009) that tests the ability of the model to follow a set of statements that set up constraints, and then logically deduce the requested information. We build on an existing repository for procedural generation of Zebra puzzles (quint t, 2023). Below, we provide an example question from the Zebra Puzzles task.

#### An example question from the Zebra Puzzle task.

There are 3 people standing in a line numbered 1 through 3 in a left to right order. Each person has a set of attributes: Food, Nationality, Hobby. The attributes have the following possible values:

- Food: nectarine, garlic, cucumber
- Nationality: chinese, japanese, thai
- Hobby: magic-tricks, filmmaking, puzzles

and exactly one person in the line has a given value for an attribute. Given the following premises about the line of people:

- the person that likes garlic is on the far left
- the person who is thai is somewhere to the right of the person who likes magic-tricks
- the person who is chinese is somewhere between the person that likes cucumber and the person who likes puzzles

Answer the following question: What is the hobby of the person who is thai? Return your answer as a single word, in the following format: **\*\*X\*\***, where X is the answer.

### 2.4 DATA ANALYSIS CATEGORY

LiveBench includes three practical tasks in which the LLM assists in data analysis or data science: column type annotation, table join prediction, and table reformatting. Each question makes use of a recent dataset from Kaggle or Socrata.

The first task is to predict the type of a column of a data table. To create a question for the column type annotation task (CTA), we randomly sample a table and randomly sample a column from that table. We use the actual name of that column as the ground truth and then retrieve some samples from that column. We provide the name of all the columns from that table and ask the LLM to select the true column name from those options.

Data analysts often also require a table to be reformatted from one type to another, e.g., from some flavor of JSON to CSV or from XML to TSV. We emulate that task in TableReformat by providing a table in one format and asking the LLM to reformat it into the target format.

Finally, another common application of LLMs in data analysis is performing table joins (Goldbloom, 2024; Liu et al., 2024b; Sheerit et al., 2024). In the TableJoin task, the LLM is presented with

---

two tables with partially overlapping sets of columns. The LLM is tasked with creating a valid join mapping from the first to the second table.

## 2.5 INSTRUCTION FOLLOWING CATEGORY

An important ability of an LLM is its capability to follow instructions. To this end, we include instruction-following questions in our benchmark, inspired by IFEval (Zhou et al., 2023a), which is an instruction-following evaluation for LLMs containing verifiable instructions such as “write more than 300 words” or “Finish your response with this exact phrase: {end\_phrase}.” While IFEval used a list of 25 verifiable instructions, we use a subset of 16 that excludes instructions that do not reflect real-world use-cases. See Appendix Table 3. Furthermore, in contrast to IFEval, which presents only the task and instructions with a simple prompt like “write a travel blog about Japan”, we provide the models with an article from The Guardian (Guardian Media Group, 1821), asking the models to adhere to multiple randomly-drawn instructions while asking the model to complete one of four tasks related to the article: Paraphrase, Simplify, Story Generation, and Summarize. We score tasks purely by their adherence to the instructions.

## 2.6 LANGUAGE COMPREHENSION CATEGORY

Finally, we include multiple language comprehension tasks. These tasks assess the language model’s ability to reason about language itself by, (1) completing word puzzles, (2) fixing misspellings while leaving other stylistic changes in place, and (3) reordering scrambled plots of unknown movies.

First, we include the Connections category. Connections is a word puzzle popularized by the New York Times (although similar ideas have existed previously). In this task, we present questions of varying levels of difficulty with 8, 12, and 16-word varieties. The objective of the game is to sort the words into sets of four words, such that each set has a ‘connection’ between them.

Next, we include the Typos task. The idea behind this task is inspired by the common use case for LLMs in which a user asks the LLM to identify typos and misspellings in some written text but to leave other aspects of the text unchanged. We create the questions for this task from recent ArXiv abstracts, which we ensure originally have no typos, by programmatically injecting common human typos into the text. Below is an example question from the Typos task.

### An example question from the Typos task.

Please output this exact text, with no changes at all except for fixing the misspellings. Please leave all other stylistic decisions like commas and US vs British spellings as in the original text.

We introduce a Bayesian estimation approach for the passive localization of an acoustic source in shallow water using a single mobile receiver. The proposed probabilistic focalization method estimates the time-varying source location in the presence of measurement-origin uncertainty. In particular, probabilistic data association is performed to match time-differences-of-arrival (TDOA) observations extracted from the acoustic signal to TDOA predictions provided by the statistical model. The performance of our approach is evaluated using real acoustic data recorded by a single mobile receiver.

Finally, we include the Plot Unscrambling task, which takes the plot synopses of recently-released movies from IMDb or Wikipedia. We randomly shuffle the synopsis sentences and then ask the LLM to simply reorder the sentences into the original plot. We find that this task is very challenging for LLMs, as it measures their abilities to reason through plausible sequences of events.

## 2.7 LIVEBENCH UPDATES AND MAINTENANCE PLAN

Maintaining a contamination-limited benchmark requires that we update the set of questions over time. We have so far released two updates, and we plan to continue to release updates to add new questions and remove outdated questions. In each update, we replace  $\frac{1}{6}$  of the questions on average, so that the benchmark is fully refreshed roughly every 6 months. We may speed up the turnover rate of questions in the future, based on interest in LiveBench. Each month, we do not release the new questions until one month later, so that the public leaderboard always has  $\frac{1}{6}$  questions that

Table 1: **LiveBench results across the 15 top-performing models.** We display in this table the highest-performing models on LiveBench, outputting the results on each main category, as well as each model’s overall performance. See Table 2 for the results on all 49 models.

Model	LiveBench Score	Coding	Data Analysis	Instruction Following	Language	Math	Reasoning
o1-preview-2024-09-12	64.7	50.8	<b>64.0</b>	74.6	<b>68.7</b>	<b>62.9</b>	67.4
claude-3-5-sonnet-20241022	58.5	<b>67.1</b>	52.8	69.3	53.8	51.3	56.7
claude-3-5-sonnet-20240620	58.2	60.8	56.7	68.0	53.2	53.3	57.2
o1-mini-2024-09-12	56.7	48.1	54.1	65.4	40.9	59.2	<b>72.3</b>
gemini-exp-1114	56.0	52.4	57.5	77.1	38.7	54.9	55.7
gemini-exp-1121	56.0	50.4	57.0	<b>80.1</b>	40.0	62.8	45.8
step-2-16k-202411	55.1	46.9	54.9	79.9	44.5	48.9	55.5
gpt-4o-2024-08-06	53.8	51.4	52.9	68.6	47.6	48.2	53.9
gemini-1.5-pro-002	53.4	48.8	52.3	70.8	43.3	57.4	47.9
gpt-4o-2024-05-13	52.6	49.4	52.4	68.2	50.0	46.0	49.6
gemini-1.5-pro-exp-0827	52.4	40.9	50.8	69.3	46.1	56.1	50.9
meta-llama-3.1-405b-instruct-turbo	51.1	43.8	53.5	72.8	43.2	40.5	52.8
gpt-4o-2024-11-20	50.6	46.1	47.2	64.9	47.4	42.5	55.7
dracarys2-72b-instruct	50.1	56.6	49.1	65.2	33.5	50.6	45.8
chatgpt-4o-latest-0903	50.1	47.4	48.7	66.4	45.3	42.1	50.5

are private. We choose tasks to update based primarily on two factors: (1) the oldest tasks, and (2) the currently easiest tasks. In this way, the questions in LiveBench will stay new and continue to challenge the most capable LLMs. See additional details, as well as a longer discussion on different forms of contamination, in Appendix A.6.

**Method for sustainability** One downside in a frequently-updating benchmark is that it requires consistent work and computational resources each month. Therefore, we have a plan in place to ensure its continued success. We maintain the best (or most popular) 40-50 models on the leaderboard so as to avoid an ever-growing list of models to evaluate each month. For example, we maintain about two versions of each model family on the leaderboard (to show the improvement from the most recent version) but no more. This ensures that we have a tractable set of at most 50 models to evaluate on 200 questions each month, which is easily within the computational budgets of the authors’ institutions. Additionally, we have already had community contributions which further reduces the computational burden of the authors.

The only other recurring work is to update the questions themselves each month. While we are excited and able to add novel tasks each month, many of the tasks are synthetic and therefore very fast and simple to create a new set of questions based on fresh data (e.g., updating the typos task using brand new arXiv papers). Additionally, we have also seen community engagement here as well.

**Completed monthly updates** In the first monthly update, we added 50 questions in a new spatial reasoning task, 28 additional coding generation questions, and 12 additional coding completion questions. The total size of the benchmark after this update became 1000. In the second monthly update, we fully updated the math olympiad questions, and we partially updated the math AMPS\_Hard and math\_comp questions, for 132 replaced questions, to maintain 1000 questions.

### 3 EXPERIMENTS

In this section, first we describe our experimental setup and present full results for 49 LLMs on all 18 tasks of LiveBench. Next, we give an empirical comparison of LiveBench to existing prominent LLM benchmarks, and finally, we present ablation studies.

**Experimental setup.** Our experiments include 49 LLMs total, with a mix of top proprietary models, large open-source models, and small open-source models. In particular, for proprietary models, we include OpenAI models such as o1-preview, chatgpt-4o, and gpt-4o (Brown et al., 2020; OpenAI, 2023), Anthropic models such as claude-3-5-sonnet-20240620, Google models such as gemini-1.5-pro-002 (Reid et al., 2024), and Mistral models such as mistral-large-2407 (Jiang et al., 2023).

---

324 For open-source models, we include models such as Llama-3.1-405b-instruct,  
325 Llama-3.1-70b-instruct (Dubey et al., 2024), deepseek-v2.5, (Liu et al., 2024a),  
326 qwen2.5-72b-instruct (Team, 2024b; Yang et al., 2024), command-r-plus-08-2024  
327 (Cohere, 2024; Cohere For AI, 2024), gemma-2-27b-it (Team, 2024a; Team et al., 2024),  
328 mixtral-8x22b-instruct-v0.1 (Jiang et al., 2023), and phi-3.5-moe-instruct (Ab-  
329 din et al., 2024). See Table 4 for a full list of citations.

330 For all models and tasks, we perform single-turn evaluation with temperature 0, unless otherwise  
331 noted in the model card. All models run with their respective templates from our updated version of  
332 FastChat (Zheng et al., 2024). We run all open-source models with `bfloat16`. When running new  
333 models, we take care to set up its hyperparameters and chat template as in the model’s example code,  
334 and we also double check the outputs to make sure that the inference, as well as our automated parsing  
335 functions, are working correctly and fairly. See more details in Appendix A.4 and Appendix A.5.

336 For each question, a model receives a score from 0 to 1. For each model, we compute the score  
337 on each task as the average of all questions, we compute the score on each of the six categories as  
338 the average of all their tasks, and we compute the final LiveBench score as the average of all six  
339 categories. In Appendix B, we give additional documentation including average input/output tokens  
340 and cost to run LiveBench for each API model.

### 342 3.1 DISCUSSION OF RESULTS

343 We compare all 49 models on LiveBench according to the experimental setup described above;  
344 see Table 1 and Table 2. We find that `o1-preview-2024-09-12` performs the best over-  
345 all, 6% better than all other models. `o1-preview-2024-09-12` substantially outperforms  
346 all other models in the data analysis, language, and math categories. The next-best model is  
347 `claude-3-5-sonnet-20240620`, which far outperforms all other models in the coding category  
348 (although `o1-mini` outperforms `claude-3.5` in code generation, `claude-3.5` has the  
349 edge in code completion). `o1-mini-2024-09-12` is third overall and is significantly better than  
350 all other models in the reasoning category.


351 The best-performing open-source models are `llama-3.1-405b-instruct` and  
352 `qwen2.5-72b-instruct`, which virtually tie with each other and outperform `gpt-4-turbo`.  
353 The best-performing small open-source model is `phi-3.5-moe-instruct` (see Table 2): with  
354 only 6.6B active parameters, it outperforms `gpt-3.5` and is on par with `mixtral-8x22b`.  
355

### 357 3.2 CORRELATION ANALYSES

358 Now we present analyses involving correlation among different categories and tasks. First, we  
359 compute the Pearson correlation coefficient among all pairs of categories and tasks in LiveBench  
360 (see Figure 2). We find that unsurprisingly, math, coding, and reasoning all correlate with one another.  
361 Interestingly, language correlates fairly well with data analysis, likely due to both categories including  
362 tasks that require the LLM to output a large part of the prompt that is modified in a specific way (e.g.,  
363 by fixing typos or changing the table format). Surprisingly, instruction following correlates relatively  
364 weakly with all other categories. Among tasks, we see that math comp correlates the highest with the  
365 average LiveBench performance, suggesting that this task is the greatest indicator of overall model  
366 performance. This is likely due to these being high-quality, diverse mathematical reasoning questions  
367 (which we modified to reduce contamination). The task that is least correlated with the average  
368 LiveBench performance is zebra puzzle; it is so challenging that all but the highest-performing  
369 models do not perform significantly better than random chance, causing a greater amount of noise in  
370 the ranking for the less-capable models.


371 Next, in order to see the strengths and weaknesses of each model, we create a scatterplot of each  
372 model’s overall LiveBench performance vs. performance on a single category or task (Figure 3).  
373 By plotting a best fit line and computing the residuals for each model, we can compute which models  
374 are outliers in specific categories – that is, models that are disproportionately stronger in a particular  
375 category relative to the best fit line. We see that the `o1` and `phi` series of models are outliers in terms  
376 of reasoning (Figure 3, left), while some of the Llama, gemini, and `command-r` models are  
377 outliers in terms of instruction following. We present additional details in Appendix A.1, including a  
table of each model’s relative best and worst tasks (computed as the highest and lowest residuals).

378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391

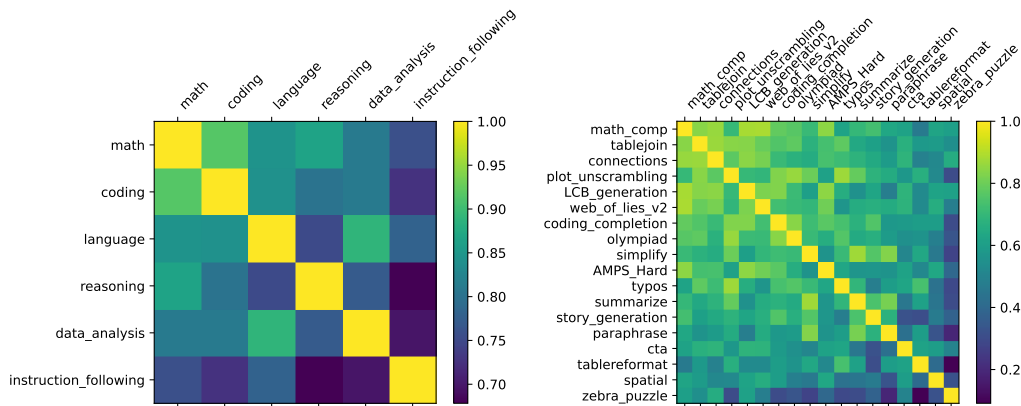

392 **Figure 2: Correlations among categories and groups in LiveBench.** For each pair of categories  
393 (left) and tasks (right) in LiveBench, we compute the Pearson correlation coefficient based on the  
394 results for all 49 models. sc

395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408

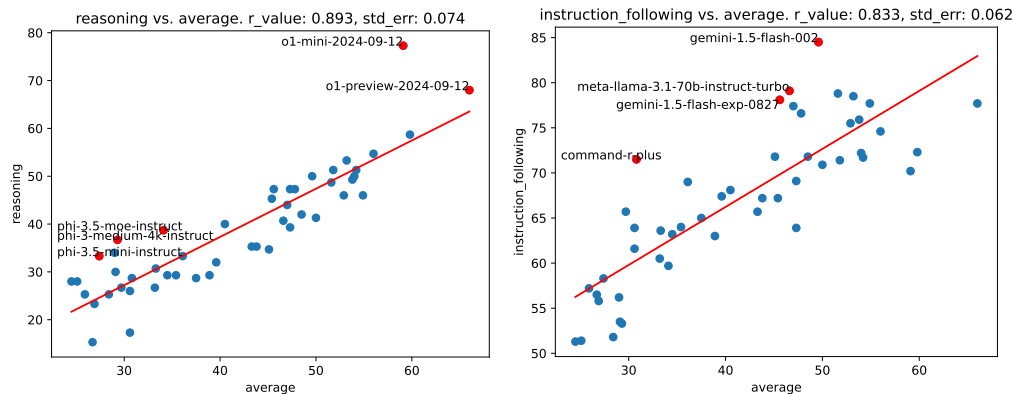

409 **Figure 3: Reasoning and instruction following performance vs. average performance.** We plot  
410 the performance of all 49 models’ reasoning (left) and instruction following (right) performance  
411 compared to overall LiveBench performance, computing a best fit line and annotating outliers.  
412

### 413 3.3 COMPARISON TO OTHER LLM BENCHMARKS

414  
415  
416 Next, we compare LiveBench to two prominent benchmarks, ChatBot Arena (Chiang et al., 2024)  
417 and Arena-Hard (Li et al., 2024). In Figure 4, we show a bar plot comparison among models that  
418 are common to both benchmarks, and in Figure 6, we compare the performance of these models to a  
419 best-fit line. We also compute the correlation coefficient of model scores among the benchmarks:  
420 LiveBench has a 0.91 and 0.88 correlation with ChatBot Arena and Arena-Hard, respectively.

421 Based on the plots and the correlation coefficients, we see that there are generally similar trends to  
422 LiveBench, yet some models are noticeably stronger on one benchmark vs. the other. For example,  
423 gpt-4-0125-preview and gpt-4-turbo-2024-04-09 perform substantially better on  
424 Arena-Hard compared to LiveBench, likely due to the known bias from using gpt-4 itself as the  
425 LLM judge (Li et al., 2024). We hypothesize that the strong performance of some models such as the  
426 gemini-1.5 models on ChatBot Arena compared to LiveBench may be due to having an output  
427 style that is preferred by humans. These observations emphasize the benefit of using ground-truth  
428 judging, which is immune to biases based on the style of the output.

429  
430  
431

**Comparison between Ground-Truth and LLM-Judging** As an additional comparison between  
LiveBench and LLM judge based benchmarks, we give a preliminary study in the Appendix on  
the efficacy of LLM judging for hard math and reasoning questions. Specifically, we run an initial





---

486 as-a-judge has disadvantages. First, human-judging can be labor-intensive, especially for certain  
487 tasks included in `LiveBench` such as complex math, coding, or long-context reasoning problems.  
488 Whenever humans are involved in annotation (of which judging is a sub-case), design choices or  
489 factors can cause high error rates (Lease, 2011), and even in well-designed human-annotation setups,  
490 high variability from human to human leads to unpredictable outcomes (Rashkin et al., 2023).

491 **Other benchmarks.** `LiveCodeBench` (Jain et al., 2024) also regularly releases new questions and  
492 makes use of ground-truth judging. However, it is limited to only coding tasks. The extensive  
493 `Omni-MATH` benchmark Gao & Liu encompasses numerous math competitions, although using  
494 LLM-as-a-judge grading potentially contributes to a degree of contamination or bias in some of the  
495 benchmark’s scores; our completely objective correctness-based scoring avoids this concern. The  
496 `SEAL Benchmark` (Scale AI, 2024), uses private questions with expert human scorers, however, the  
497 benchmark currently only contains the following categories: Math, Coding, Instruction Following,  
498 and Spanish. In Srivastava et al. (2024), the authors modify the original `MATH` dataset (Hendrycks  
499 et al., 2021) by changing numbers in the problem setup. They find declines in model performance for  
500 some LLMs, including frontier ones. However, while such work can evaluate LLMs on data that is  
501 not in the pretraining set, the data still ends up being highly similar to the kind of data likely seen in  
502 the pretraining set. In addition, the hardness of the benchmark remains the same over time.

503 Finally, we discuss benchmarks that were the basis for tasks in `LiveBench`. In `IFEval` (Zhou  
504 et al., 2023b), the authors assess how good LLMs are at following instructions by adding one or  
505 more constraints in the instruction as to what the output should be. They limit the set of constraints  
506 to those in which it can provably be verified that the generation followed the constraints. In `Big-  
507 Bench` (Srivastava et al., 2022), a large number of tasks are aggregated into a single benchmark with  
508 the aim of being as comprehensive as possible. `Big-Bench-Hard` (Suzgun et al., 2022) investigates a  
509 subset of `Big-Bench` tasks that were particularly challenging for contemporaneous models as well as  
510 more complex prompting strategies for solving them.

## 511 5 CONCLUSIONS, LIMITATIONS, AND FUTURE WORK

512  
513 In this work, we introduced `LiveBench`, an LLM benchmark designed to mitigate both test set  
514 contamination and the pitfalls of LLM judging and human crowdsourcing. `LiveBench` is the first  
515 benchmark that (1) contains frequently updated questions from new information sources, in which  
516 questions become harder over time, (2) scores answers automatically according to objective ground-  
517 truth values, without the use of LLM judges, and (3) contains a wide variety of challenging tasks,  
518 spanning math, coding, reasoning, language, instruction following, and data analysis. `LiveBench`  
519 contains questions that are based on recently released math competitions, arXiv papers, and datasets,  
520 and it contains harder, `contamination-limited` versions of previously released benchmarks. We  
521 released all questions, code, and model answers, and questions are added and updated on a monthly  
522 basis. We welcome community collaboration for expanding the benchmark tasks and models.

523 **Limitations and Future Work.** While we attempted to make `LiveBench` as diverse as possible,  
524 there are still additions from which it would benefit. For example, we hope to add non-English  
525 language tasks in the future. Furthermore, while ground truth scoring is beneficial in many ways, it  
526 still cannot be used for certain use cases, such as ‘write a travel guide to Hawaii’ in which it is hard to  
527 define a ground truth. Finally, while we attempted to make all tasks and categories fair for all models,  
528 there are still biases due to certain LLM families favoring certain prompt types. We plan to update the  
529 prompts (at the start and end of each question) in the future, as new prompt strategies are developed.  
530 Similarly, we plan to continue updating the `LiveBench` leaderboard as new LLMs are released.

## 531 6 REPRODUCIBILITY STATEMENT

532  
533  
534 Our work is fully reproducible: we open-source the leaderboard, all questions, all code to run API  
535 and open-source models, all model outputs for 49 models, and all code to score the models. In other  
536 words, every part of the project is available publicly: [https://anonymous.4open.science/  
537 r/LiveBench](https://anonymous.4open.science/r/LiveBench). The only exception is that as the benchmark becomes more popular, we withhold  
538 releasing the new set of questions each month, so that there are always some questions that are private.  
539 These questions are then made public one month later. The readme in the above link gives instructions  
to download all parts of the project and to score new models.

---

## 7 ETHICS STATEMENT

Our paper introduces a new benchmark for LLMs, which contains frequently-updated questions from new information sources, scores answers according to objective ground-truth values, and contains a wide variety of tasks. We do not see any inherently negative broader societal impacts of our work.

Our hope is that our work will have a positive impact for both practitioners and researchers: by providing a new benchmark with frequently-updated questions, our work has the potential to both accelerate future research and enable more comprehensive and rigorous evaluations of existing and future models. Furthermore, we hope that the general framework of our benchmark – frequently-updated questions with new information sources – will catch on, mitigating the negative effects of contamination in future LLM evaluation and making LLM benchmarks more ‘future-proof’.

## REFERENCES

- Marah Abdin, Sam Ade Jacobs, Ammar Ahmad Awan, Jyoti Aneja, Ahmed Awadallah, Hany Awadalla, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Harkirat Behl, et al. Phi-3 technical report: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*, 2024.
- Bo Adler, Niket Agarwal, Ashwath Aithal, Dong H Anh, Pallab Bhattacharya, Annika Brundyn, Jared Casper, Bryan Catanzaro, Sharon Clay, Jonathan Cohen, et al. Nemotron-4 340b technical report. *arXiv preprint arXiv:2406.11704*, 2024.
- AI Anthropic. The claude 3 model family: Opus, sonnet, haiku. *Claude-3 Model Card*, 2024.
- Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, et al. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023.
- Edward Beeching, Clémentine Fourrier, Nathan Habib, Sheon Han, Nathan Lambert, Nazneen Rajani, Omar Sanseviero, Lewis Tunstall, and Thomas Wolf. Open llm leaderboard. [https://huggingface.co/spaces/HuggingFaceH4/open\\_llm\\_leaderboard](https://huggingface.co/spaces/HuggingFaceH4/open_llm_leaderboard), 2023.
- BIG bench authors. Beyond the imitation game: Quantifying and extrapolating the capabilities of language models. *Transactions on Machine Learning Research*, 2023. ISSN 2835-8856. URL <https://openreview.net/forum?id=uyTL5Bvosj>.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, et al. Sparks of artificial general intelligence: Early experiments with gpt-4. *arXiv preprint arXiv:2303.12712*, 2023.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, et al. A survey on evaluation of large language models. *ACM Transactions on Intelligent Systems and Technology*, 15(3):1–45, 2024.
- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E Gonzalez, et al. Vicuna: An open-source chatbot impressing gpt-4 with 90%\* chatgpt quality. See <https://vicuna.lmsys.org> (accessed 14 April 2023), 2(3):6, 2023.
- Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios Nikolas Angelopoulos, Tianle Li, Dacheng Li, Hao Zhang, Banghua Zhu, Michael Jordan, Joseph E Gonzalez, et al. Chatbot arena: An open platform for evaluating llms by human preference. *arXiv preprint arXiv:2403.04132*, 2024.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Cohere. Command r: Retrieval-augmented generation at production scale. <https://txt.cohere.com/command-r>, March 2024.

---

594 Cohere For AI. c4ai-command-r-plus-08-2024, 2024. URL <https://huggingface.co/CohereForAI/c4ai-command-r-plus-08-2024>.

595

596

597 DeepSeek-AI, Aixin Liu, Bei Feng, Bin Wang, Bingxuan Wang, Bo Liu, Chenggang Zhao, Chengqi

598 Dengr, Chong Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dongjie Ji, Erhang Li,

599 Fangyun Lin, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Hanwei Xu, Hao

600 Yang, Haowei Zhang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Li, Hui Qu, J. L. Cai, Jian

601 Liang, Jianzhong Guo, Jiaqi Ni, Jiashi Li, Jin Chen, Jingyang Yuan, Junjie Qiu, Junxiao Song, Kai

602 Dong, Kaige Gao, Kang Guan, Lean Wang, Lecong Zhang, Lei Xu, Leyi Xia, Liang Zhao, Liyue

603 Zhang, Meng Li, Miaojun Wang, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Mingming

604 Li, Ning Tian, Panpan Huang, Peiyi Wang, Peng Zhang, Qihao Zhu, Qinyu Chen, Qiushi Du, R. J.

605 Chen, R. L. Jin, Ruiqi Ge, Ruizhe Pan, Runxin Xu, Ruyi Chen, S. S. Li, Shanghao Lu, Shangyan

606 Zhou, Shanhuang Chen, Shaoqing Wu, Shengfeng Ye, Shirong Ma, Shiyu Wang, Shuang Zhou,

607 Shuiping Yu, Shunfeng Zhou, Size Zheng, T. Wang, Tian Pei, Tian Yuan, Tianyu Sun, W. L.

608 Xiao, Wangding Zeng, Wei An, Wen Liu, Wenfeng Liang, Wenjun Gao, Wentao Zhang, X. Q. Li,

609 Xiangyue Jin, Xianzu Wang, Xiao Bi, Xiaodong Liu, Xiaohan Wang, Xiaojin Shen, Xiaokang

610 Chen, Xiaosha Chen, Xiaotao Nie, Xiaowen Sun, Xiaoxiang Wang, Xin Liu, Xin Xie, Xingkai

611 Yu, Xinnan Song, Xinyi Zhou, Xinyu Yang, Xuan Lu, Xuecheng Su, Y. Wu, Y. K. Li, Y. X. Wei,

612 Y. X. Zhu, Yanhong Xu, Yanping Huang, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Li, Yaohui

613 Wang, Yi Zheng, Yichao Zhang, Yiliang Xiong, Yilong Zhao, Ying He, Ying Tang, Yishi Piao,

614 Yixin Dong, Yixuan Tan, Yiyuan Liu, Yongji Wang, Yongqiang Guo, Yuchen Zhu, Yudian Wang,

615 Yuheng Zou, Yukun Zha, Yunxian Ma, Yuting Yan, Yuxiang You, Yuxuan Liu, Z. Z. Ren, Zehui

616 Ren, Zhangli Sha, Zhe Fu, Zhen Huang, Zhen Zhang, Zhenda Xie, Zhewen Hao, Zhihong Shao,

617 Zhiniu Wen, Zhipeng Xu, Zhongyu Zhang, Zhuoshu Li, Zihan Wang, Zihui Gu, Zilin Li, and Ziwei

618 Xie. Deepseek-v2: A strong, economical, and efficient mixture-of-experts language model, 2024.

619

620 Chunyuan Deng, Yilun Zhao, Xiangru Tang, Mark Gerstein, and Arman Cohan. Investigating data

621 contamination in modern benchmarks for large language models. *arXiv preprint arXiv:2311.09783*,

622 2023.

623

624 Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep

625 bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.

626

627 Yihong Dong, Xue Jiang, Huanyu Liu, Zhi Jin, and Ge Li. Generalization or memorization: Data con-

628 tamination and trustworthy evaluation for large language models. *arXiv preprint arXiv:2402.15938*,

629 2024.

630

631 Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha

632 Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models.

633 *arXiv preprint arXiv:2407.21783*, 2024.

634

635 Yann Dubois, Xuechen Li, Rohan Taori, Tianyi Zhang, Ishaan Gulrajani, Jimmy Ba, Carlos Guestrin,

636 Percy Liang, and Tatsunori B. Hashimoto. AlpacaFarm: A simulation framework for methods that

637 learn from human feedback, 2023.

638

639 Yann Dubois, Balázs Galambosi, Percy Liang, and Tatsunori B Hashimoto. Length-controlled

640 alpacaEval: A simple way to debias automatic evaluators. *arXiv preprint arXiv:2404.04475*, 2024.

641

642 J Douglas Faires and David Wells. *The Contest Problem Book VIII: American Mathematics Competi-*

643 *tions (AMC 10) 2000–2007*, volume 19. American Mathematical Society, 2022.

644

645 Benjamin Feuer, Yurong Liu, Chinmay Hegde, and Juliana Freire. ArcheType: A Novel Framework

646 for Open-Source Column Type Annotation using Large Language Models, October 2023. URL

647 <http://arxiv.org/abs/2310.18208>. arXiv:2310.18208 [cs].

---

648 Timnit Gebru, Jamie Morgenstern, Briana Vecchione, Jennifer Wortman Vaughan, Hanna Wallach,  
649 Hal Daumé Iii, and Kate Crawford. Datasheets for datasets. *Communications of the ACM*, 64(12):  
650 86–92, 2021.

651 Shahriar Golchin and Mihai Surdeanu. Data contamination quiz: A tool to detect and estimate  
652 contamination in large language models. *arXiv preprint arXiv:2311.06233*, 2023a.

653  
654 Shahriar Golchin and Mihai Surdeanu. Time travel in llms: Tracing data contamination in large  
655 language models. *arXiv preprint arXiv:2308.08493*, 2023b.

656  
657 Anthony Goldbloom. The overlooked genai use case. [https://blog.sumble.com/  
658 the-overlooked-genai-use-case/](https://blog.sumble.com/the-overlooked-genai-use-case/), October 2024. Accessed: 2024-11-23.

659  
660 Guardian Media Group. The guardian. <https://www.theguardian.com/>, 1821. Accessed:  
661 2024-01-20.

662 Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song,  
663 and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv  
664 preprint arXiv:2103.03874*, 2021.

665  
666 Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Os-  
667 trow, Akila Welihinda, Alan Hayes, Alec Radford, et al. Gpt-4o system card. *arXiv preprint  
668 arXiv:2410.21276*, 2024.

669 Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando  
670 Solar-Lezama, Koushik Sen, and Ion Stoica. Livecodebench: Holistic and contamination free  
671 evaluation of large language models for code. *arXiv preprint arXiv:2403.07974*, 2024.

672  
673 S Jeremy. Einstein’s riddle: Riddles, paradoxes, and conundrums to stretch your mind. *Bloomsbury  
674 USA*, pp. 10–11, 2009.

675  
676 Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot,  
677 Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al.  
678 Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.

679  
680 Vishakha Suresh Kalal, Andrew Parry, and Sean MacAvaney. Training on the test model: Contamina-  
681 tion in ranking distillation. *arXiv preprint arXiv:2411.02284*, 2024.

682  
683 Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large  
684 language models are zero-shot reasoners. *Proceedings of the Annual Conference on Neural  
685 Information Processing Systems (NeurIPS)*, 2022.

686  
687 Matthew Lease. On quality control and machine learning in crowdsourcing. In *Workshops at the  
688 twenty-fifth AAAI conference on artificial intelligence*, 2011.

689  
690 Vladimir I. Levenshtein. Binary codes capable of correcting deletions, insertions, and reversals.  
691 *Soviet Physics Doklady*, 10(8):707–710, 1966.

692  
693 Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou,  
694 Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, et al. Starcoder: may the source be with  
695 you! *arXiv preprint arXiv:2305.06161*, 2023a.

696  
697 Tianle Li, Wei-Lin Chiang, Evan Frick, Lisa Dunlap, Banghua Zhu, Joseph E. Gonzalez, and Ion  
698 Stoica. From live data to high-quality benchmarks: The arena-hard pipeline, April 2024. URL  
699 <https://lmsys.org/blog/2024-04-19-arena-hard/>.

700  
701 Xuechen Li, Tianyi Zhang, Yann Dubois, Rohan Taori, Ishaan Gulrajani, Carlos Guestrin, Percy  
702 Liang, and Tatsunori B. Hashimoto. AlpacaEval: An automatic evaluator of instruction-following  
703 models. [https://github.com/tatsu-lab/alpaca\\_eval](https://github.com/tatsu-lab/alpaca_eval), 2023b.

704  
705 Aixin Liu, Bei Feng, Bin Wang, Bingxuan Wang, Bo Liu, Chenggang Zhao, Chengqi Deng, Chong  
706 Ruan, Damai Dai, Daya Guo, et al. Deepseek-v2: A strong, economical, and efficient mixture-of-  
707 experts language model. *arXiv preprint arXiv:2405.04434*, 2024a.

---

702 Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike  
703 Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining  
704 approach, 2019.

705

706 Yurong Liu, Aécio Santos, Eduardo HM Pena, Roque Lopez, Eden Wu, and Juliana Freire. Enhancing  
707 biomedical schema matching with llm-based training data generation. In *NeurIPS Third Table  
708 Representation Learning Workshop*, 2024b.

709 Meta. Introducing meta llama 3: The most capable openly available llm to date. [https://ai.  
710 meta.com/blog/meta-llama-3/](https://ai.meta.com/blog/meta-llama-3/), April 2024. Accessed: June 4, 2024.

711

712 Aaron Meurer, Christopher P. Smith, Mateusz Paprocki, Ondřej Čertík, Sergey B. Kirpichev, Matthew  
713 Rocklin, AMiT Kumar, Sergiu Ivanov, Jason K. Moore, Sartaj Singh, Thilina Rathnayake, Sean  
714 Vig, Brian E. Granger, Richard P. Muller, Francesco Bonazzi, Harsh Gupta, Shivam Vats, Fredrik  
715 Johansson, Fabian Pedregosa, Matthew J. Curry, Andy R. Terrel, Štěpán Roučka, Ashutosh  
716 Saboo, Isuru Fernando, Sumith Kulal, Robert Cimrman, and Anthony Scopatz. Sympy: symbolic  
717 computing in python. *PeerJ Computer Science*, 3:e103, January 2017. ISSN 2376-5992. doi:  
718 10.7717/peerj-cs.103. URL <https://doi.org/10.7717/peerj-cs.103>.

719 Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A. Rusu, Joel Veness, Marc G.  
720 Bellemare, Alex Graves, Martin Riedmiller, Andreas K. Fidjeland, Georg Ostrovski, Stig Pe-  
721 tersen, Charles Beattie, Amir Sadik, Ioannis Antonoglou, Helen King, Dharshan Kumaran,  
722 Daan Wierstra, Shane Legg, and Demis Hassabis. Human-level control through deep rein-  
723 forcement learning. *Nature*, 518(7540):529–533, February 2015. ISSN 00280836. URL  
724 <http://dx.doi.org/10.1038/nature14236>.

725 OpenAI. Gpt-4 technical report. *Technical Report*, 2023.

726

727 Yonatan Oren, Nicole Meister, Niladri Chatterji, Faisal Ladhak, and Tatsunori B Hashimoto. Proving  
728 test set contamination in black box language models. *arXiv preprint arXiv:2310.17623*, 2023.

729 quint t. Puzzle generator and puzzle solver. [https://github.com/quint-t/  
730 Puzzle-Generator-and-Solver](https://github.com/quint-t/Puzzle-Generator-and-Solver), 2023.

731

732 Hannah Rashkin, Vitaly Nikolaev, Matthew Lamm, Lora Aroyo, Michael Collins, Dipanjan Das,  
733 Slav Petrov, Gaurav Singh Tomar, Iulia Turc, and David Reitter. Measuring attribution in natural  
734 language generation models. *Computational Linguistics*, 49(4):777–840, 2023.

735 John W. Ratcliff and David E. Metzener. Pattern matching: The gestalt approach. *Dr. Dobb’s Journal*,  
736 pp. 46, 1988.

737

738 Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste  
739 Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini  
740 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint  
741 arXiv:2403.05530*, 2024.

742 Manley Roberts, Himanshu Thakur, Christine Herlihy, Colin White, and Samuel Dooley. To the  
743 cutoff... and beyond? a longitudinal perspective on llm data contamination. In *Proceedings of the  
744 International Conference on Learning Representations (ICLR)*, 2024.

745 Scale AI. Seal leaderboards. <https://scale.com/leaderboard>, May 2024.

746

747 Eitam Sheerit, Menachem Brief, Moshik Mishaeli, and Oren Elisha. Rematch: Retrieval enhanced  
748 schema matching with llms. *arXiv preprint arXiv:2403.01567*, 2024.

749

750 Aaditya K Singh, Muhammed Yusuf Kocyigit, Andrew Poulton, David Esiobu, Maria Lomeli, Gergely  
751 Szilvasy, and Dieuwke Hupkes. Evaluation data contamination in llms: how do we measure it and  
752 (when) does it matter? *arXiv preprint arXiv:2411.03923*, 2024.

753 Aarohi Srivastava, Abhinav Rastogi, Abhishek Rao, Abu Awal Md Shoeb, Abubakar Abid, Adam  
754 Fisch, Adam R Brown, Adam Santoro, Aditya Gupta, Adrià Garriga-Alonso, et al. Beyond the  
755 imitation game: Quantifying and extrapolating the capabilities of language models. *arXiv preprint  
arXiv:2206.04615*, 2022.

---

756 Saurabh Srivastava, Anto PV, Shashank Menon, Ajay Sukumar, Alan Philipose, Stevin Prince, Sooraj  
757 Thomas, et al. Functional benchmarks for robust evaluation of reasoning performance, and the  
758 reasoning gap. *arXiv preprint arXiv:2402.19450*, 2024.

759 Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung,  
760 Aakanksha Chowdhery, Quoc V Le, Ed H Chi, Denny Zhou, et al. Challenging big-bench tasks  
761 and whether chain-of-thought can solve them. *arXiv preprint arXiv:2210.09261*, 2022.

762 Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung,  
763 Aakanksha Chowdhery, Quoc Le, Ed Chi, Denny Zhou, et al. Challenging big-bench tasks and  
764 whether chain-of-thought can solve them. In *Findings of the Association for Computational*  
765 *Linguistics: ACL 2023*, pp. 13003–13051, 2023.

766 AtCoder Team. Atcoder. <https://atcoder.jp/>, a.

767 Gemma Team. Gemma. 2024a. doi: 10.34740/KAGGLE/M/3301. URL <https://www.kaggle.com/m/3301>.

768 Gemma Team, Morgane Riviere, Shreya Pathak, Pier Giuseppe Sessa, Cassidy Hardin, Surya  
769 Bhupatiraju, Léonard Hussenot, Thomas Mesnard, Bobak Shahriari, Alexandre Ramé, et al.  
770 Gemma 2: Improving open language models at a practical size. *arXiv preprint arXiv:2408.00118*,  
771 2024.

772 LeetCode Team. Leetcode. <https://leetcode.com/>, b.

773 Python 3 Team. difflib. <https://docs.python.org/3/library/difflib.html>, c.

774 Qwen Team. Qwen2.5: A party of foundation models, September 2024b. URL <https://qwenlm.github.io/blog/qwen2.5/>.

775 Graham Todd, Tim Merino, Sam Earle, and Julian Togelius. Missed connections: Lateral thinking  
776 puzzles for large language models, 2024.

777 Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay  
778 Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation  
779 and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.

780 Lewis Tunstall, Edward Beeching, Nathan Lambert, Nazneen Rajani, Kashif Rasul, Younes Belkada,  
781 Shengyi Huang, Leandro von Werra, Clémentine Fourrier, Nathan Habib, Nathan Sarrazin, Omar  
782 Sanseviero, Alexander M. Rush, and Thomas Wolf. Zephyr: Direct distillation of lm alignment,  
783 2023.

784 Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming  
785 Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, et al. Mmlu-pro: A more robust and challenging  
786 multi-task language understanding benchmark. *arXiv preprint arXiv:2406.01574*, 2024.

787 Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny  
788 Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Proceedings*  
789 *of the Annual Conference on Neural Information Processing Systems (NeurIPS)*, 2022.

790 Cong Yan and Yeye He. Auto-Suggest: Learning-to-Recommend Data Preparation Steps Using  
791 Data Science Notebooks. In *Proceedings of the 2020 ACM SIGMOD International Conference on*  
792 *Management of Data*, pp. 1539–1554, Portland OR USA, June 2020. ACM. ISBN 978-1-4503-  
793 6735-6. doi: 10.1145/3318464.3389738. URL [https://dl.acm.org/doi/10.1145/](https://dl.acm.org/doi/10.1145/3318464.3389738)  
794 [3318464.3389738](https://dl.acm.org/doi/10.1145/3318464.3389738).

795 An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li,  
796 Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang,  
797 Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jin Xu, Jingren Zhou, Jinze Bai,  
798 Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng  
799 Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai  
800 Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan  
801 Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Yang Fan, Yang Yao, Yichang  
802 Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zhihao Fan. Qwen2  
803 technical report. *arXiv preprint arXiv:2407.10671*, 2024.

---

810 Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan.  
811 Tree of thoughts: Deliberate problem solving with large language models. *Proceedings of the*  
812 *Annual Conference on Neural Information Processing Systems (NeurIPS)*, 36, 2024.  
813

814 Hugh Zhang, Jeff Da, Dean Lee, Vaughn Robinson, Catherine Wu, Will Song, Tiffany Zhao, Pranav  
815 Raja, Dylan Slack, Qin Lyu, et al. A careful examination of large language model performance on  
816 grade school arithmetic. *arXiv preprint arXiv:2405.00332*, 2024.

817 Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang,  
818 Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. Judging llm-as-a-judge with mt-bench and  
819 chatbot arena. *Advances in Neural Information Processing Systems*, 36, 2024.

820 Jeffrey Zhou, Tianjian Lu, Swaroop Mishra, Siddhartha Brahma, Sujoy Basu, Yi Luan, Denny  
821 Zhou, and Le Hou. Instruction-following evaluation for large language models. *arXiv preprint*  
822 *arXiv:2311.07911*, 2023a.  
823

824 Jeffrey Zhou, Tianjian Lu, Swaroop Mishra, Siddhartha Brahma, Sujoy Basu, Yi Luan, Denny  
825 Zhou, and Le Hou. Instruction-following evaluation for large language models. *arXiv preprint*  
826 *arXiv:2311.07911*, 2023b.

827 Banghua Zhu, Evan Frick, Tianhao Wu, Hanlin Zhu, and Jiantao Jiao. Starling-7b: Improving llm  
828 helpfulness & harmlessness with rlaif, November 2023.  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863



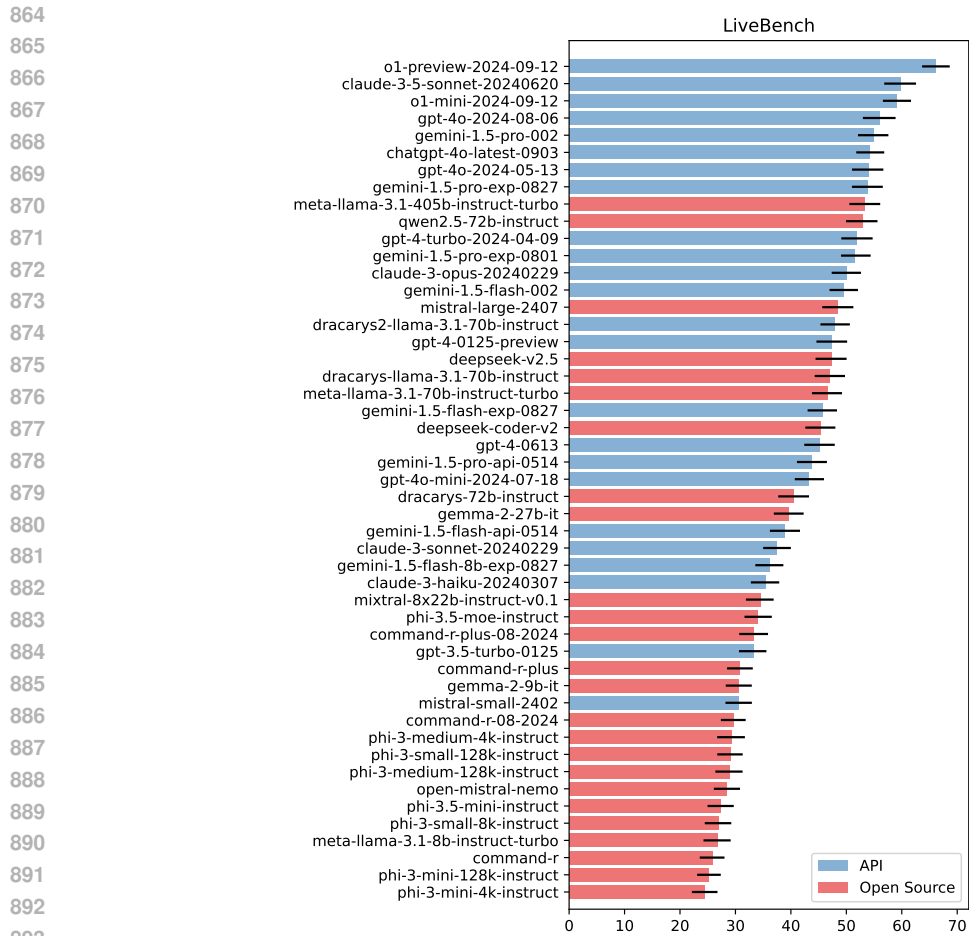


Figure 5: Results on LiveBench for all models, showing 95% bootstrap confidence intervals. This is the full version of Figure 1 (left).

## A ADDITIONAL DETAILS ABOUT LIVEBENCH EXPERIMENTS

In this section, we detail further descriptions about the LiveBench benchmark itself and our experiments.

We include further depictions of the comparisons of LiveBench to ChatBot Arena and Arena-Hard in Figure 6. We display the full results table for LiveBench in Table 2. We display the full bar plot for LiveBench in Figure 5.

We display the list of all verifiable instructions in Table 3.

We display a table with the citations for all models in Table 4.

### A.1 DETAILS FROM CORRELATION ANALYSES

Here, we provide more details from Section 3.2. First, we present the Pearson correlation coefficient and std. error for each category (Table 5) and task (Table 6) compared to the overall average LiveBench score, computed using data from all 49 models. This is a supplement to Figure 2. In Table 7, we compute the relative best and worst task for each model, specifically, the tasks with the highest and lowest residuals of the best fit line vs. overall LiveBench performance. In other words, we compute the task that each model most outperforms and underperforms on, relative to a theoretical model with the same overall performance but has balanced performance across each task.

Table 2: **LiveBench results across 49 models.** We output the results for each model on each main category, as well as each model’s overall LiveBench score.

Model	LiveBench Score	Coding	Data Analysis	Instruction Following	Language	Math	Reasoning
o1-preview-2024-09-12	<b>66.0</b>	50.8	<b>64.0</b>	77.7	<b>72.7</b>	<b>62.9</b>	68.0
claude-3-5-sonnet-20240620	59.8	<b>60.8</b>	56.7	72.3	56.9	53.3	58.7
o1-mini-2024-09-12	59.1	48.1	54.1	70.2	45.7	59.2	<b>77.3</b>
gpt-4o-2024-08-06	56.0	51.4	52.9	74.6	54.4	48.2	54.7
gemini-1.5-pro-002	54.9	48.8	52.3	77.7	47.4	57.4	46.0
chatgpt-4o-latest-0903	54.2	49.7	54.2	71.7	51.7	46.7	51.3
gpt-4o-2024-05-13	54.0	49.4	52.4	72.2	53.9	46.0	50.0
gemini-1.5-pro-exp-0827	53.8	40.9	50.8	75.9	49.3	56.1	49.3
llama-3.1-405b-instruct	53.2	43.8	53.5	78.5	49.8	40.5	53.3
qwen2.5-72b-instruct	52.9	56.6	48.8	75.5	38.1	52.4	46.0
gpt-4-turbo-2024-04-09	51.8	49.0	51.3	71.4	45.3	42.7	51.3
gemini-1.5-pro-exp-0801	51.6	41.2	50.2	78.8	47.0	43.5	48.7
claude-3-opus-20240229	50.0	38.6	54.3	70.9	51.7	43.4	41.3
gemini-1.5-flash-002	49.6	41.9	44.2	<b>84.5</b>	29.5	47.2	50.0
mistral-large-2407	48.5	47.1	46.6	71.8	39.8	43.7	42.0
dracarys2-llama-3.1-70b-instruct	47.8	36.3	46.1	76.6	41.5	38.9	47.3
gpt-4o125-preview	47.3	41.8	54.1	63.9	43.6	33.4	47.3
deepseek-v2.5	47.3	45.5	46.8	69.1	35.2	47.9	39.3
dracarys-llama-3.1-70b-instruct	47.0	35.2	48.0	77.4	41.8	35.6	44.0
meta-llama-3.1-70b-instruct-turbo	46.6	32.7	50.3	79.1	42.4	34.4	40.7
gemini-1.5-flash-exp-0827	45.6	40.6	47.9	78.1	31.0	28.9	47.3
deepseek-coder-v2	45.4	41.5	38.3	67.2	33.0	47.1	45.3
gpt-4o613	45.1	37.3	44.0	71.8	49.6	33.5	34.7
gemini-1.5-pro-api-0514	43.8	32.3	52.8	67.2	38.3	36.9	35.3
gpt-4o-mini-2024-07-18	43.3	43.2	44.5	65.7	35.3	35.6	35.3
dracarys-72b-instruct	40.5	38.9	26.2	68.1	31.2	38.4	40.0
gemma-2-27b-it	39.6	35.9	43.6	67.4	32.4	26.2	32.0
gemini-1.5-flash-api-0514	38.9	34.3	44.0	63.0	30.7	32.3	29.3
claude-3-sonnet-20240229	37.5	26.4	44.6	65.0	38.1	22.2	28.7
gemini-1.5-flash-8b-exp-0827	36.1	28.7	35.3	69.0	22.5	27.8	33.3
claude-3-haiku-20240307	35.4	24.5	41.5	64.0	30.1	22.9	29.3
mixtral-8x22b-instruct-v0.1	34.5	32.0	31.7	63.2	26.5	24.5	29.3
phi-3.5-moe-instruct	34.1	21.7	40.5	59.7	17.1	26.8	38.7
command-r-plus-08-2024	33.3	19.5	35.9	63.6	31.0	19.3	30.7
gpt-3.5-turbo-0125	33.2	27.7	41.2	60.5	24.2	18.9	26.7
command-r-plus	30.8	19.5	24.6	71.5	23.9	16.8	28.7
gemma-2-9b-it	30.6	22.5	35.1	61.6	27.6	19.5	17.3
mistral-small-2402	30.6	21.2	31.9	63.9	22.1	18.5	26.0
command-r-08-2024	29.7	17.9	31.3	65.7	17.0	19.5	26.7
phi-3-medium-4k-instruct	29.3	20.5	31.6	53.3	13.9	19.6	36.7
phi-3-small-128k-instruct	29.1	24.6	27.3	53.5	15.5	23.6	30.0
phi-3-medium-128k-instruct	29.0	21.1	32.1	56.2	12.8	17.6	34.0
open-mistral-nemo	28.4	28.7	33.4	51.8	14.1	16.9	25.3
phi-3.5-mini-instruct	27.4	15.9	30.4	58.3	9.7	16.8	33.3
phi-3-small-8k-instruct	26.9	20.3	29.6	55.8	15.1	17.2	23.3
meta-llama-3.1-8b-instruct-turbo	26.7	19.7	32.2	56.5	20.0	16.6	15.3
command-r	25.9	15.3	31.7	57.2	14.6	11.5	25.3
phi-3-mini-128k-instruct	25.1	15.0	34.0	51.4	7.8	14.6	28.0
phi-3-mini-4k-instruct	24.5	15.0	29.5	51.3	8.1	15.0	28.0

## A.2 DETAILS FROM ABLATION STUDIES

In this section, we give the details for the ablation study described in Section 3.3. For hard math and reasoning questions, if an LLM struggles to answer the question, then will it also struggle to determine whether or not a given answer to that question is correct? There are some classes of problems for which the answer is surely ‘no’: any problems that are hard to solve by frontier LLMs, yet easy to check whether an answer is correct or not, such as NP-Hard problems. Another exception is that if an LLM judge is given access to the ground truth, then it will (of course) be able to judge whether or not answers are correct. The tasks in our original experiments (AMC, AIME, and Zebra puzzles) may not fit the class of exceptions. By way of a preliminary study of the above suggestion (that LLM judges cannot judge Zebra puzzles and AMC/AIME questions that they cannot solve), we run an experimental test. We use a judge prompt based on the MT-Bench judge prompt, which is duplicated below.

Table 3: The list of 25 instructions used in (Zhou et al., 2023a), and the 16 that are both ‘real-world’ and automatically verifiable, which we used in LiveBench. Descriptions are from (Zhou et al., 2023a).

Instruction Group	Instruction	Description	In IFEval	In LiveBench
Keywords	Include Keywords	Include keywords {keyword1}, {keyword2} in your response	✓	✓
Keywords	Keyword Frequency	In your response, the word word should appear {N} times.	✓	
Keywords	Forbidden Words	Do not include keywords {forbidden words} in the response.	✓	✓
Keywords	Letter Frequency	In your response, the letter {letter} should appear {N} times.	✓	
Language	Response Language	Your ENTIRE response should be in {language}, no other language is allowed.	✓	
Length Constraints	Number Paragraphs	Your response should contain {N} paragraphs. You separate paragraphs using the markdown divider: * * *	✓	✓
Length Constraints	Number Words	Answer with at least / around / at most {N} words.	✓	✓
Length Constraints	Number Sentences	Answer with at least / around / at most {N} sentences.	✓	✓
Length Constraints	Number Paragraphs + First Word in i-th Paragraph	There should be {N} paragraphs. Paragraphs and only paragraphs are separated with each other by two line breaks. The {i}-th paragraph must start with word {first_word}.	✓	✓
Detectable Content	Postscript	At the end of your response, please explicitly add a postscript starting with {postscript marker}	✓	✓
Detectable Content	Number Placeholder	The response must contain at least {N} placeholders represented by square brackets, such as [address].	✓	
Detectable Format	Number Bullets	Your answer must contain exactly {N} bullet points. Use the markdown bullet points such as: * This is a point.	✓	✓
Detectable Format	Title	Your answer must contain a title, wrapped in double angular brackets, such as <<poem of joy>>.	✓	✓
Detectable Format	Choose From	Answer with one of the following options: {options}	✓	
Detectable Format	Minimum Number Highlighted Section	Highlight at least {N} sections in your answer with markdown, i.e. *highlighted section*	✓	
Detectable Format	Multiple Sections	Your response must have {N} sections. Mark the beginning of each section with {section_splitter} X.	✓	✓
Detectable Format	JSON Format	Entire output should be wrapped in JSON format.	✓	✓
Combination	Repeat Prompt	First, repeat the request without change, then give your answer (do not say anything before repeating the request; the request you need to repeat does not include this sentence)	✓	✓
Combination	Two Responses	Give two different responses. Responses and only responses should be separated by 6 asterisk symbols: * * * * *	✓	✓
Change Cases	All Uppercase	Your entire response should be in English, capital letters only.	✓	
Change Cases	All Lowercase	Your entire response should be in English, and in all lowercase letters. No capital letters are allowed.	✓	
Change Cases	Frequency of All-capital Words	In your response, words with all capital letters should appear at least / around / at most {N} times.	✓	
Start with / End with	End Checker	Finish your response with this exact phrase {end_phrase}. No other words should follow this phrase.	✓	✓
Start with / End with	Quotation	Wrap your entire response with double quotation marks.	✓	✓
Punctuation	No Commas	In your entire response, refrain from the use of any commas.	✓	

[Instruction] Please act as an impartial judge and evaluate the quality of the response provided by an AI assistant to the user question displayed below. Your evaluation should consider correctness alone. Identify and correct any mistakes. Be as objective as possible. After providing your explanation, you must rate the response as either 1 (correct) or 0 (incorrect) by strictly following this format: “[rating]”, for example: “Rating: [1]” [Question] question [The Start of Assistant’s Answer] answer [The End of Assistant’s Answer]

We use gpt-4-turbo-2024-04-09 as the judge. We judge the model outputs of both gpt-4-turbo-2024-04-09 and claude-3-opus-20240229.

See Table 8 and Table 9. We find that the error rate for all tasks is far above a reasonable value, indicating that LLM judges are not appropriate for challenging math and logic tasks. However, we note that there may be other experimental setups which could change the result, such as using a more detailed prompt that is tailored to the task of judging hard math and reasoning problems.

1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079

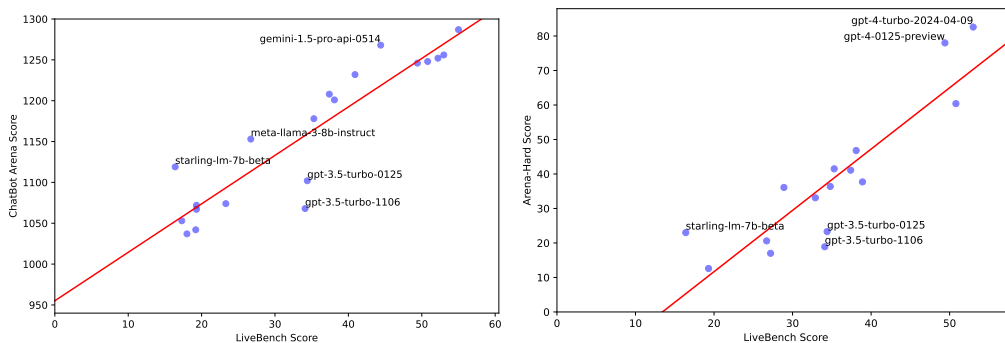


Figure 6: **The performance of models on different benchmarks, compared to a best-fit line.** We compare the different in relative performance of LLMs on LiveBench vs. ChatBot Arena, and LiveBench vs. Arena-Hard. We see that while many models are near the best-fit lines, a few are notable outliers, providing evidence that their output style may be noticeably better or worse than their ability to answer questions.

### A.3 DETAILED DESCRIPTION OF LIVEBENCH CATEGORIES

In this section, we describe the categories and tasks of LiveBench and the grading methods in more detail.

#### A.3.1 MATH CATEGORY

Evaluating the mathematical abilities of LLMs has been one of the cornerstones of recent research in LLMs, featuring prominently in many releases and reports (Reid et al., 2024; OpenAI, 2023; Brown et al., 2020; Bubeck et al., 2023). Our benchmark includes math questions of three types: modified questions from recent high school math competitions, fill-in-the-blank questions from recent proof-based USAMO and IMO problems, and questions from our new, harder version of the AMPS dataset (Hendrycks et al., 2021).

**Math competitions.** Our first math category is based on expert human-designed math problems that offer a wider variety in terms of problem type and solution technique. We focus on high school math competition questions from English-speaking countries: AMC12, AIME, SMC, and USAMO, and also IMO, the international competition.

First, we include questions based on the *American Mathematics Competition 12 (AMC12)*, both AMC12A and AMC12B 2023, released on November 8, 2023 and November 14, 2023, respectively, and the Senior Mathematical Challenge (SMC) 2023, released on October 3, 2023. All three are challenging multiple-choice competitions for high school students in the USA (AMC) and UK (SMC) that build in difficulty, meant as the first step for high school students to qualify for their country’s team for the International Mathematical Olympiad (IMO).

The questions test mathematical problem solving with arithmetic, algebra, counting, geometry, number theory, probability, and other secondary school math topics (Faires & Wells, 2022). We modify the questions by updating the prose of the questions that do not affect the answer, by rearranging the order of the multiple choice answers when applicable, and by asking for a different output format than the widely-used source website (<https://artofproblemsolving.com/>). An example of a problem of this type from the AMC12A 2023 problem set is below:

1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133

Table 4: List of models evaluated (across all LiveBench versions) and their respective citations.

Model Name	Citation
chatgpt-4o-latest-0903	(Hurst et al., 2024)
claude-3-5-haiku-20241022	<a href="https://www.anthropic.com/claude/haiku">https://www.anthropic.com/claude/haiku</a>
claude-3-5-sonnet-20240620	<a href="https://www.anthropic.com/news/claude-3-5-sonnet">https://www.anthropic.com/news/claude-3-5-sonnet</a>
claude-3-5-sonnet-20241022	<a href="https://www.anthropic.com/news/claude-3-5-sonnet">https://www.anthropic.com/news/claude-3-5-sonnet</a>
claude-3-haiku-20240307	(Anthropic, 2024)
claude-3-opus-20240229	(Anthropic, 2024)
claude-3-sonnet-20240229	(Anthropic, 2024)
command-r	(Cohere, 2024)
command-r-08-2024	(Cohere, 2024)
command-r-plus	(Cohere, 2024)
command-r-plus-08-2024	(Cohere, 2024)
deepseek-coder-v2	(DeepSeek-AI et al., 2024)
deepseek-coder-v2-lite-instruct	(DeepSeek-AI et al., 2024)
deepseek-v2-lite-chat	(DeepSeek-AI et al., 2024)
deepseek-v2.5	(DeepSeek-AI et al., 2024)
dracarys-72b-instruct	<a href="https://huggingface.co/abacusai/Dracarys-72B-Instruct">https://huggingface.co/abacusai/Dracarys-72B-Instruct</a>
dracarys-llama-3.1-70b-instruct	<a href="https://huggingface.co/abacusai/Dracarys-Llama-3.1-70B-Instruct">https://huggingface.co/abacusai/Dracarys-Llama-3.1-70B-Instruct</a>
dracarys2-72b-instruct	<a href="https://huggingface.co/abacusai/Dracarys2-72B-Instruct">https://huggingface.co/abacusai/Dracarys2-72B-Instruct</a>
dracarys2-llama-3.1-70b-instruct	<a href="https://huggingface.co/abacusai/Dracarys2-Llama-3.1-70B-Instruct">https://huggingface.co/abacusai/Dracarys2-Llama-3.1-70B-Instruct</a>
gemini-1.5-flash-002	(Reid et al., 2024)
gemini-1.5-flash-8b-exp-0827	(Reid et al., 2024)
gemini-1.5-flash-api-0514	(Reid et al., 2024)
gemini-1.5-flash-exp-0827	(Reid et al., 2024)
gemini-1.5-pro-002	(Reid et al., 2024)
gemini-1.5-pro-api-0514	(Reid et al., 2024)
gemini-1.5-pro-exp-0801	(Reid et al., 2024)
gemini-1.5-pro-exp-0827	(Reid et al., 2024)
gemini-exp-1114	<a href="https://ai.google.dev/gemini-api/docs/models/experimental-models">https://ai.google.dev/gemini-api/docs/models/experimental-models</a>
gemini-exp-1121	<a href="https://ai.google.dev/gemini-api/docs/models/experimental-models">https://ai.google.dev/gemini-api/docs/models/experimental-models</a>
gemma-1.1-7b-it	(Team, 2024a)
gemma-2-27b-it	(Team et al., 2024)
gemma-2-2b	(Team et al., 2024)
gemma-2-9b-it	(Team et al., 2024)
gpt-3.5-turbo-0125	(Brown et al., 2020)
gpt-3.5-turbo-1106	(Brown et al., 2020)
gpt-4-0125-preview	(OpenAI, 2023)
gpt-4-0613	(OpenAI, 2023)
gpt-4-1106-preview	(OpenAI, 2023)
gpt-4-turbo-2024-04-09	(OpenAI, 2023)
gpt-4o-2024-05-13	(Hurst et al., 2024)
gpt-4o-2024-08-06	(Hurst et al., 2024)
gpt-4o-2024-11-20	(Hurst et al., 2024)
gpt-4o-mini-2024-07-18	(Hurst et al., 2024)
grok-2	<a href="https://x.ai/blog/grok-2">https://x.ai/blog/grok-2</a>
grok-2-mini	<a href="https://x.ai/blog/grok-2">https://x.ai/blog/grok-2</a>
llama-2-7b-chat-hf	(Touvron et al., 2023)
llama-3.1-nemotron-70b-instruct	(Adler et al., 2024)
meta-llama-3-70b-instruct	(Meta, 2024)
meta-llama-3-8b-instruct	(Meta, 2024)
meta-llama-3.1-405b-instruct-turbo	(Dubey et al., 2024)
meta-llama-3.1-70b-instruct-turbo	(Dubey et al., 2024)
meta-llama-3.1-8b-instruct-turbo	(Dubey et al., 2024)
mistral-7b-instruct-v0.2	(Jiang et al., 2023)
mistral-7b-instruct-v0.3	(Jiang et al., 2023)
mistral-large-2402	(Jiang et al., 2023)
mistral-large-2407	(Jiang et al., 2023)
mistral-small-2402	(Jiang et al., 2023)
mixtral-8x22b-instruct-v0.1	(Jiang et al., 2023)
mixtral-8x7b-instruct-v0.1	(Jiang et al., 2023)
ol-mini-2024-09-12	<a href="https://openai.com/index/openai-ol-system-card/">https://openai.com/index/openai-ol-system-card/</a>
ol-preview-2024-09-12	<a href="https://openai.com/index/openai-ol-system-card/">https://openai.com/index/openai-ol-system-card/</a>
open-mistral-nemo	(Jiang et al., 2023)
phi-3-medium-128k-instruct	(Abdin et al., 2024)
phi-3-mini-128k-instruct	(Abdin et al., 2024)
phi-3-small-128k-instruct	(Abdin et al., 2024)
phi-3.5-mini-instruct	(Abdin et al., 2024)
phi-3.5-moe-instruct	(Abdin et al., 2024)
qwen1.5-0.5b-chat	(Bai et al., 2023)
qwen1.5-72b-chat	(Bai et al., 2023)
qwen1.5-110b-chat	(Bai et al., 2023)
qwen1.5-7b-chat	(Bai et al., 2023)
qwen2-0.5b-instruct	(Yang et al., 2024)
qwen2-1.5b-instruct	(Yang et al., 2024)
qwen2-72b-instruct	(Yang et al., 2024)
qwen2-7b-instruct	(Yang et al., 2024)
qwen2.5-72b-instruct	(Team, 2024b)
qwen2.5-7b-instruct-turbo	(Team, 2024b)
starling-1m-7b-beta	(Zhu et al., 2023)
step-2-16k-202411	<a href="https://www.stepfun.com/#step2">https://www.stepfun.com/#step2</a>
vicuna-7b-v1.5	(Chiang et al., 2023)
vicuna-7b-v1.5-16k	(Chiang et al., 2023)
yi-6b-chat	<a href="https://huggingface.co/01-ai/Yi-6B">https://huggingface.co/01-ai/Yi-6B</a>
zephyr-7b-alpha	(Tunstall et al., 2023)
zephyr-7b-beta	(Tunstall et al., 2023)

**An example question from the Math Competitions task.**

How many complex numbers satisfy the equation  $z^5 = \bar{z}$ , where  $\bar{z}$  is the conjugate of the complex number  $z$ ? (A) 2 (B) 3 (C) 5 (D) 6 (E) 7

If you cannot determine the correct multiple-choice answer, take your best guess. Once you have your answer, please duplicate that letter five times in a single string. For example, if the answer is F, then write FFFFF.

1134 Table 5: Pearson correlation coefficient and std. error for each category compared to the overall  
 1135 average LiveBench score, computed using data from all 49 models.

Category	Correlation	Std Error
math	0.9552	0.0552
language	0.9361	0.0697
coding	0.9361	0.0577
data_analysis	0.9073	0.0543
reasoning	0.8934	0.0740
instruction_following	0.8330	0.0623

1144 Table 6: Pearson correlation coefficient and std. error for each task compared to the overall average  
 1145 LiveBench score, computed using data from all 49 models.

Category	Correlation	Std Error
math_comp	0.9215	0.0815
tablejoin	0.9093	0.0796
LCB_generation	0.9050	0.0578
connections	0.8968	0.1085
coding_completion	0.8915	0.0936
web_of_lies_v2	0.8914	0.1453
plot_unscrambling	0.8808	0.0784
olympiad	0.8529	0.0979
AMPS_Hard	0.8503	0.1123
typos	0.8187	0.1339
simplify	0.8070	0.0725
summarize	0.7831	0.0885
story_generation	0.7446	0.0797
cta	0.7347	0.0595
paraphrase	0.7065	0.0763
tablereformat	0.6742	0.1238
spatial	0.6668	0.0909
zebra_puzzle	0.5236	0.1209

1166 **Ground Truth:** EEEEE

1169 Next, we include the *American Invitational Mathematics Examination (AIME)*, both AIME I and  
 1170 AIME II 2024, released on January 31, 2024 and February 7, 2024, respectively. These are prestigious  
 1171 and challenging tests given to those who rank in the top 5% of the AMC. Each question’s answer is  
 1172 an integer from 000 to 999. An example of a problem of this type from the AIME I 2024 problem set  
 1173 is below:

1174 **An example question from the Math Competitions task.**  
 1175 Real numbers  $x$  and  $y$  with  $x, y > 1$  satisfy  $\log_x(y^x) = \log_y(x^{4y}) = 10$ . What is the  
 1176 value of  $xy$ ? Please think step by step, and then display the answer at the very end of  
 1177 your response. The answer is an integer consisting of exactly 3 digits (including leading  
 1178 zeros), ranging from 000 to 999, inclusive. For example, the answer might be 068 or 972.  
 1179 If you cannot determine the correct answer, take your best guess. Remember to have the  
 1180 three digits as the last part of the response.

1181 **Ground Truth:** 025

1184 **Proof-based questions.** We consider the *USA Math Olympiad (USAMO) 2024* and *International*  
 1185 *Math Olympiad (IMO) 2024* competitions, released on March 20, 2024 and July 22, 2024, respectively.  
 1186 These contests are primarily proof-based and non-trivial to evaluate in an automated way. One  
 1187 possibility is to use LLMs to evaluate the correctness of the natural language proof. However,  
 we then have *no* formal guarantees on the correctness of the evaluation. Another possibility is to

1188 Table 7: Relative best and worst task for each model, computed as the tasks with the highest and  
 1189 lowest residuals of the best fit line vs. overall LiveBench performance, for each model.

1191	Model	Best	Worst
1192	o1-preview-2024-09-12	connections	coding_completion
1193	claude-3-5-sonnet-20240620	olympiad	math_comp
1194	o1-mini-2024-09-12	zebra_puzzle	plot_unscrambling
1195	gpt-4o-2024-08-06	spatial	web_of_lies_v2
1196	gemini-1.5-pro-002	olympiad	zebra_puzzle
1197	chatgpt-4o-latest-0903	cta	summarize
1198	gpt-4o-2024-05-13	typos	tablejoin
1199	gemini-1.5-pro-exp-0827	olympiad	LCB_generation
1200	meta-llama-3.1-405b-instruct-turbo	web_of_lies_v2	olympiad
1201	qwen2.5-72b-instruct	AMPS_Hard	typos
1202	gpt-4-turbo-2024-04-09	LCB_generation	paraphrase
1203	gemini-1.5-pro-exp-0801	summarize	math_comp
1204	claude-3-opus-20240229	typos	web_of_lies_v2
1205	gemini-1.5-flash-002	summarize	typos
1206	mistral-large-2407	olympiad	connections
1207	dracarys2-llama-3.1-70b-instruct	web_of_lies_v2	zebra_puzzle
1208	gpt-4-0125-preview	tablereformat	olympiad
1209	deepseek-v2.5	olympiad	zebra_puzzle
1210	dracarys-llama-3.1-70b-instruct	web_of_lies_v2	coding_completion
1211	meta-llama-3.1-70b-instruct-turbo	summarize	zebra_puzzle
1212	gemini-1.5-flash-exp-0827	simplify	AMPS_Hard
1213	deepseek-coder-v2	olympiad	tablereformat
1214	gpt-4-0613	typos	web_of_lies_v2
1215	gemini-1.5-pro-api-0514	tablejoin	connections
1216	gpt-4o-mini-2024-07-18	AMPS_Hard	web_of_lies_v2
1217	dracarys-72b-instruct	coding_completion	tablereformat
1218	gemma-2-27b-it	tablereformat	web_of_lies_v2
1219	gemini-1.5-flash-api-0514	typos	web_of_lies_v2
1220	claude-3-sonnet-20240229	typos	web_of_lies_v2
1221	gemini-1.5-flash-8b-exp-0827	spatial	zebra_puzzle
1222	claude-3-haiku-20240307	typos	web_of_lies_v2
1223	mixtral-8x22b-instruct-v0.1	coding_completion	tablereformat
1224	phi-3.5-moe-instruct	web_of_lies_v2	tablejoin
1225	command-r-plus-08-2024	typos	coding_completion
1226	gpt-3.5-turbo-0125	typos	web_of_lies_v2
1227	command-r-plus	story_generation	tablereformat
1228	gemma-2-9b-it	typos	spatial
1229	mistral-small-2402	connections	spatial
1230	command-r-08-2024	paraphrase	AMPS_Hard
1231	phi-3-medium-4k-instruct	web_of_lies_v2	typos
1232	phi-3-small-128k-instruct	AMPS_Hard	summarize
1233	phi-3-medium-128k-instruct	web_of_lies_v2	typos
1234	open-mistral-nemo	coding_completion	summarize
1235	phi-3.5-mini-instruct	web_of_lies_v2	typos
1236	phi-3-small-8k-instruct	zebra_puzzle	spatial
1237	meta-llama-3.1-8b-instruct-turbo	typos	zebra_puzzle
1238	command-r	zebra_puzzle	AMPS_Hard
1239	phi-3-mini-128k-instruct	spatial	typos
1240	phi-3-mini-4k-instruct	spatial	summarize

1239 *auto-formalize* the proofs into a formal language such as Lean and then run a proof checker. However,  
 1240 while there have been notable recent improvements in auto-formalization, such a process still does not  
 1241 have formal guarantees on the correctness of the auto-formalization – and thus that of the evaluation.  
 To tackle this, we formulate a novel task which can test the ability of an LLM in the context of proofs.

Table 8: **LLM judges cannot accurately evaluate challenging math and reasoning questions.** Error rate of LLM-as-a-judge scoring on challenging math (AMC, AIME, SMC) and reasoning (Zebra puzzles) tasks. On all tasks, the error rate is surprisingly high, showing that LLMs are not reliable judges for these tasks.

Model	Judge	AMC12 2024	AIME 2024	SMC 2023	Zebra Puzzles
GPT-4-Turbo	GPT-4-Turbo	0.380	0.214	0.353	0.420
Claude-3-Opus	GPT-4-Turbo	0.388	0.103	0.294	0.460

Table 9: Model Performance on math and reasoning tasks with both ground-truth (GT) or LLM judging (LLM-Jdg.)

	AMC12 2024		AIME 2024		SMC 2023		Zebra Puzzles	
	GT	LLM-Jdg.	GT	LLM-Jdg.	GT	LLM-Jdg.	GT	LLM-Jdg.
GPT-4-Turbo	54	64.000	13.793	35.714	70.588	58.824	38	68
Claude-3-Opus	56	42.857	6.897	17.241	58.824	52.941	34	52

Specifically, for a proof, we *mask* out a subset of the formulae in the proof. We then present the masked out formulae in a *scrambled* order to the LLM and ask it to *reinsert* the formulae in the correct positions. Such a task tests the mathematical, deductive, and instruction following abilities of the LLM. In particular, if the LLM is strong enough to generate the correct proof for a question, then one would expect it to also solve the far easier task of completing a proof which has some missing formulae – especially if the formulae are already given to it in a scrambled order. Note that this also allows us to easily control the level of difficulty of the question by changing the number of formulae that we mask.

We generate 3 hardness variants for each problem, masking out 10%, 50% and 80% of the equations in the proof. We evaluate by computing the edit distance between the ground truth ranking order and the model predicted ranking order. [NB : in preliminary testing we also evaluated using the accuracy metric and the model rankings remained nearly the same]. Models perform worse on IMO compared to USAMO, in line with expectations. We also looked at the performance as separated by question hardness. The scores are greatly affected by question hardness going from as high as 96.8 for the easiest questions (10% masked out, GPT-4o) to as low as 36 for the hardest (80% masked out). The full results are in Table 10 and Table 11.

**Synthetically generated math questions.** Finally, we release synthetic generated math questions. This technique is inspired from math question generation used to create the MATH and AMPS datasets (Hendrycks et al., 2021). In particular, we randomly generate a math problem of one of several types, such as taking the derivative or integral of a function, completing the square, or factoring a polynomial. We generate questions by drawing random primitives, using a larger (and therefore more challenging) distribution than AMPS. Note that, for problem types such as integration, this simple technique of drawing a random function and taking its derivative results in a wide variety of integration problems of varying difficulty. For example, problem solutions may involve applying the chain rule, the product/quotient rule, trigonometric identities, or use a change of variables. In order to extract the answer, we ask the model to use the same ‘latex boxed answer’ technique as in the MATH dataset (Hendrycks et al., 2021). We judge the correctness of answers as in the EleutherAI Eval Harness (Gao et al., 2021) using Sympy (Meurer et al., 2017) where we check for semantic as well as numerical equivalence of mathematical expressions. An example of an integral problem is as follows:

**An example question from the AMPS Hard task.**

Find an indefinite integral (which can vary by a constant) of the following function:  $5 \sec^2(5x + 1) - 8 \sin(7 - 8x)$ . Please put your final answer in a *boxed*{ }.

**Ground Truth:**  $-\sin(7) \sin(8x) - \cos(7) \cos(8x) + \tan(5x + 1)$



1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349

Table 10: IMO/USAMO results for each of 34 models across all hardness levels.

Model	IMO	USAMO	Avg.
gpt-4o-2024-05-13	60.24	67.47	63.85
gpt-4-1106-preview	58.16	67.17	62.66
claude-3-opus-20240229	52.56	63.66	58.11
gpt-4-turbo-2024-04-09	50.96	64.80	57.88
gemini-1.5-pro-latest	52.11	59.15	55.63
gpt-4-0125-preview	43.04	60.66	51.85
Meta-Llama-3-70B-Instruct	43.24	59.55	51.40
claude-3-sonnet-20240229	44.78	52.97	48.87
command-r-plus	48.33	44.55	46.44
gpt-3.5-turbo-1106	40.37	49.65	45.01
mistral-large-2402	38.65	50.41	44.53
claude-3-haiku-20240307	41.51	47.31	44.41
gpt-3.5-turbo-0125	38.44	47.17	42.80
Qwen1.5-72B-Chat	34.35	48.47	41.41
Mixtral-8x22B-Instruct-v0.1	33.00	48.62	40.81
mistral-small-2402	34.51	44.78	39.64
Meta-Llama-3-8B-Instruct	36.05	36.59	36.32
Qwen1.5-110B-Chat	23.93	46.78	35.35
Mistral-7B-Instruct-v0.2	36.00	34.31	35.15
command-r	31.36	29.38	30.37
Phi-3-mini-128k-instruct	25.84	33.54	29.69
Mixtral-8x7B-Instruct-v0.1	26.52	32.50	29.51
Phi-3-mini-4k-instruct	26.60	30.33	28.46
Qwen1.5-7B-Chat	22.10	31.84	26.97
Starling-LM-7B-beta	14.99	28.70	21.84
zephyr-7b-alpha	25.99	16.43	21.21
vicuna-7b-v1.5-16k	23.14	16.69	19.91
Yi-6B-Chat	18.17	20.05	19.11
zephyr-7b-beta	9.57	22.57	16.07
Llama-2-7b-chat-hf	20.00	11.53	15.77
Qwen1.5-4B-Chat	11.90	16.78	14.34
vicuna-7b-v1.5	16.19	9.87	13.03
Qwen1.5-0.5B-Chat	9.27	10.61	9.94
Qwen1.5-1.8B-Chat	0.98	9.13	5.06

Table 11: IMO/USAMO results for each hardness level across 34 models.

Hardness level	Avg.	IMO	USAMO
Easy	57.48	54.68	60.27
Medium	29.60	25.79	33.41
Hard	19.11	15.96	22.25

### A.3.2 CODING CATEGORY

The coding ability of LLMs is one of the most widely studied and sought-after skills for LLMs (Mnih et al., 2015; Jain et al., 2024; Li et al., 2023a). We include two coding tasks in LiveBench: a modified version of the code generation task from LiveCodeBench (Jain et al., 2024), and a novel code completion task combining LiveCodeBench problems with partial solutions collected from GitHub sources. Examples of questions from the Coding tasks can be found [here](#).

**Code generation.** In the LCB Generation task, we assess a model’s ability to parse a competition coding question statement and write a correct answer. LiveCodeBench (Jain et al., 2024) included several tasks to assess the coding capabilities of large language models. We have taken 78

---

1350 randomly selected problems from the April 2024 release of LiveCodeBench, selecting only problems  
1351 released in or after November 2023. The problems are competition programming problems from  
1352 LeetCode (Team, b) and AtCoder (Team, a), defined with a textual description and solved by writing  
1353 full programs in Python 3 code.

1354 These problems are presented as in LiveCodeBench’s Code Generation task, with minor prompting  
1355 differences and with only one chance at generating a correct solution per question, per model. We  
1356 report pass@1, a metric which describes the proportion of questions that a given model solved  
1357 completely (a solution is considered correct if and only if it passes all public and private test cases).  
1358

1359  
1360  
1361

1362 **Code completion.** In this task, we assess the ability of the model to successfully complete a  
1363 partially provided solution to a competition coding question statement. The setup is similar to the  
1364 Code Generation task above, but a partial (correct) solution is provided in the prompt and the model  
1365 is instructed to complete it to solve the question. We use LeetCode easy, medium, and hard problems  
1366 from LiveCodeBench’s (Jain et al., 2024) April 2024 release, combined with matching solutions  
1367 from <https://github.com/kamyu104/LeetCode-Solutions>, omitting the last 15% of  
1368 each medium/hard solution and 30-70% of each easy solution and asking the LLM to complete the  
1369 solution. As with Code Generation, we report pass@1.

1370  
1371

### 1372 A.3.3 REASONING CATEGORY

1373

1374  
1375 The reasoning abilities of large language models is another highly-benchmarked and analyzed skill  
1376 of LLMs (Wei et al., 2022; Suzgun et al., 2023; Yao et al., 2024). In LiveBench, we include two  
1377 reasoning tasks: a harder version of a task from Big-Bench Hard (Suzgun et al., 2023), and Zebra  
1378 puzzles.

1379  
1380  
1381

1382 **Web of lies v2.** Web of Lies is a task included in Big-Bench (bench authors, 2023) and Big-  
1383 Bench Hard (Suzgun et al., 2023). The task is to evaluate the truth value of a random Boolean  
1384 function expressed as a natural-language word problem. In particular, the LLM must evaluate  
1385  $f_n(f_{n-1}(\dots f_1(x)\dots))$ , where each  $f_i$  is either negation or identity, and  $x$  is True or False. We  
1386 represent  $x$  by the sentence:  $X_0$  {tells the truth, lies}, and we represent  $f_i$  by a sentence:  $X_i$  says  
1387  $X_{i-1}$  {tells the truth, lies}. The sentences can be presented in a random order for increased difficulty.  
1388 For example, a simple  $n = 2$  version is as follows: ‘Ka says Yolanda tells the truth. Yolanda lies. Does  
1389 Ka tell the truth?’ Already by October 2022, LLMs achieved near 100% on this task, and furthermore,  
1390 there are concerns that Big-Bench tasks leaked into the training data of GPT-4, despite using canary  
1391 strings (OpenAI, 2023).

1392 For LiveBench, we create a new, significantly harder version of Web of Lies. We make the task  
1393 harder with a few additions: (1) adding different types of red herrings, (2) asking for the truth values  
1394 of three people, instead of just one person, and (3) adding a simple additional deductive component.  
1395 For (1), we maintain a list of red herring names, so that the red herrings do not affect the logic of the  
1396 answer while still potentially leading LLMs astray. For example, ‘Fred says Kayla lies,’ where Fred  
1397 is in the true ‘web of lies’, while Kayla may lead to a series of steps ending in a dead end. Overall,  
1398 the number of total red herring sentences is drawn from a uniform distribution ranging from 0 to 19.  
1399 For (3), we simply assign each name to a location and give sentences of the form ‘Devika is at the  
1400 museum. The person at the museum says the person at the ice skating rink lies.’ We find that this  
1401 makes the task significantly harder for leading LLMs, even without shuffling the sentences into a  
1402 random order.

1403

1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457

**An example question from the Web of Lies v2 task.**

In this question, assume each person either always tells the truth or always lies. Tala is at the movie theater. The person at the restaurant says the person at the aquarium lies. Ayaan is at the aquarium. Ryan is at the botanical garden. The person at the park says the person at the art gallery lies. The person at the museum tells the truth. Zara is at the museum. Jake is at the art gallery. The person at the art gallery says the person at the theater lies. Beatriz is at the park. The person at the movie theater says the person at the train station lies. Nadia is at the campground. The person at the campground says the person at the art gallery tells the truth. The person at the theater lies. The person at the amusement park says the person at the aquarium tells the truth. Grace is at the restaurant. The person at the aquarium thinks their friend is lying. Nia is at the theater. Kehinde is at the train station. The person at the theater thinks their friend is lying. The person at the botanical garden says the person at the train station tells the truth. The person at the aquarium says the person at the campground tells the truth. The person at the aquarium saw a firetruck. The person at the train station says the person at the amusement park lies. Mateo is at the amusement park. Does the person at the train station tell the truth? Does the person at the amusement park tell the truth? Does the person at the aquarium tell the truth? Think step by step, and then put your answer in **bold** as a list of three words, yes or no (for example, **yes, no, yes**). If you don't know, guess.

**Ground Truth:** no, yes, yes

**Zebra puzzles.** The second reasoning task we include is Zebra puzzles. Zebra puzzles, also called Einstein's riddles or Einstein's puzzles, are a well-known (Jeremy, 2009) reasoning task that tests the ability of the model to follow a set of statements that set up constraints, and then logically deduce the requested information. The following is an example with three people and three attributes:

**An example question from the Zebra Puzzle task.**

There are 3 people standing in a line numbered 1 through 3 in a left to right order. Each person has a set of attributes: Food, Nationality, Hobby. The attributes have the following possible values:

- Food: nectarine, garlic, cucumber
- Nationality: chinese, japanese, thai
- Hobby: magic-tricks, filmmaking, puzzles

and exactly one person in the line has a given value for an attribute.

Given the following premises about the line of people:

- the person that likes garlic is on the far left
- the person who is thai is somewhere to the right of the person who likes magic-tricks
- the person who is chinese is somewhere between the person that likes cucumber and the person who likes puzzles

Answer the following question:

What is the hobby of the person who is thai? Return your answer as a single word, in the following format: **\*\*\*X\*\*\***, where X is the answer.

**Ground Truth:** filmmaking

We build on an existing repository for procedural generation of Zebra puzzles (quint t, 2023); the repository allows for randomizing the number of people, the number of attributes, and the set of constraint statements provided. For the attribute randomization, they are drawn from a set of 10 possible categories (such as Nationality, Food, Transport, Sport) and for each of these categories there are between 15 and 40 possible values to be taken. For the constraint statements, the implementation allows for up to 20 'levels' of constraint in ascending order of intended difficulty. For example, level 1 could include a statement such as 'The person who likes garlic is on the left of the person who plays badminton' and a level 10 statement could be 'The person that watches zombie movies likes apples or the person that watches zombie movies likes drawing, but not both'. Higher levels also include lower level statements in their possible set of statements to draw from, but this set narrows progressively as the level increases from 12 to 20 by removing the possibility of having lower-level statements (starting with removing level 1, then removing level 2, etc).

1458 The repository also includes a solver for the puzzles, which we use to ensure there is a (unique)  
1459 solution to all of our generated puzzles.

1460 Our modifications to the original repository primarily target the reduction of ambiguity in the  
1461 statements (e.g. changing ‘X is to the left of Y’ to ‘X is to the *immediate* left of Y’). For generation,  
1462 we pick either 3 or 4 people with 50% probability, either 3 or 4 attributes with 50% probability, and  
1463 we draw the levels from the integer interval [10, 20] with uniform probability. In preliminary testing,  
1464 we found that larger puzzles proved exceedingly difficult for even the top performing LLMs.

1466 **Spatial reasoning.** The final reasoning task is spatial reasoning questions. This set of 50 handwritten  
1467 questions tests a model’s ability to make deductions about intersections and orientations of common  
1468 2D and 3D shapes. Two example questions are below.

1470 **Example question one from the Spatial Reasoning task.**

1471 Suppose I have three spheres of radius 3 resting on a plane. Each sphere is tangent to  
1472 the other two spheres. If I consider a new shape whose vertices are equal to the set of  
1473 tangent points of the pairs of spheres, what is the new shape? Is it a square, tetrahedron,  
1474 triangle, circle, line segment, or rhombus? Think step by step, and then put your answer  
1475 in **bold** as a single phrase (for example, **circle**). If you don’t know, guess.

1476 **Ground Truth:** triangle

1478 **Example question two from the Spatial Reasoning task.**

1479 Suppose I have a regular heptagon, and I can make four straight cuts. Each cut cannot  
1480 pass through any of the vertices of the heptagon. Also, exactly two of the cuts must be  
1481 parallel. What is the maximum number of resulting pieces? Think step by step, and then  
1482 put your answer in **bold** as a single integer (for example, **0**). If you don’t know,  
1483 guess.

1484 **Ground Truth:** 10

1486  
1487 A.3.4 DATA ANALYSIS

1488 LiveBench includes three practical tasks in which the LLM assists in data analysis or data science:  
1489 column type annotation, table join prediction, and table reformatting. Each question makes use of a  
1490 recent dataset from Kaggle or Socrata.

1491 Owing to the limited output context lengths of the current generation of LLMs and the comparatively  
1492 high per-token costs of generating responses, we upper bound the size of our tables with respect to  
1493 cell length, column count and row count. Even with these limitations, we find that our tasks remain  
1494 sufficiently challenging even for the current state-of-the-art models.

1495 Example questions from the Data Analysis category can be lengthy, so examples can be viewed [here](#).

1497  
1498 **Column type annotation.** Consider a table  $A$  with  $t$  columns and  $r$  rows. We denote each column  
1499  $C \in A$  as a function which maps row indices to strings; i.e., for  $0 \leq i < t$ , we have  $C_i : \mathbb{N} \rightarrow \Sigma_*$ ,  
1500 where  $i$  is the column index. Let  $L \subseteq \Sigma_*$  denote a label set; these are our column types to be  
1501 annotated. Standard CTA assumes a fixed cardinality for this label set, indexed by a variable we call  
1502  $j$ . Given the above definitions, we define single-label CTA  $CTA \subset A \times L$  as a relation between tables  
1503 and labels:

$$1504 \quad \forall C, \exists l_j \mid (C_i, l_j) \in CTA \quad (1)$$

1505 We seek a generative method  $M : \Sigma_* \rightarrow \Sigma_*$  that comes closest to satisfying the following properties:

$$1506 \quad M(\sigma, L) \in L, \forall C \in A, M(\sigma, L) \in CTA \quad (2)$$

1507 For further details on the task, please refer to Feuer et al. (2023). **Implementation details.** For each  
1508 benchmark instance, we retrieve a random  $A$  from our available pool of recent tables. We randomly  
1509 and uniformly sample  $C$  from  $A$ , use the actual column name of  $A$  as our CTA ground-truth  $L$ , and  
1510 retrieve  $\sigma_1 \cdots \sigma_5$  column samples from  $C$ , with replacement, providing them as context for the LLM.  
1511 **Metrics.** We report Accuracy @ 1 over all instances, accepting only case-insensitive exact string  
matches as correct answers.

**Table reformatting.** Given a table  $A$  rendered according to a plaintext-readable and valid schema for storing tabular information  $a_s$ , we instruct the LLM to output the same table with the contents unchanged but the schema modified to a distinct plaintext-readable valid schema  $b_s$ . **Implementation details.** We use the popular library Pandas to perform all of our conversions to and from text strings. We allow the following formats for both input and output: "JSON", "JSONL", "Markdown", "CSV", "TSV", "HTML". As tabular conversion from JSON to Pandas is not standardized, we accept several variations. At inference time, we ingest the LLM response table directly into Pandas. **Metrics.** We report Accuracy @ 1 over all instances. An instance is accepted only if it passes all tests (we compare column count, row count, and exact match on row contents for each instance).

**Join-column prediction.** Given two tables  $A$  and  $B$ , with columns  $a_1, \dots$  and  $b_1, \dots$  respectively, the *join-column prediction* task is to suggest a pair  $(a_k, b_l)$  of columns such that the equality condition  $a_k = b_l$  can be used to join the the tables in a way that matches with the provided ground-truth mapping  $M : A \rightarrow B$ . The mapping is usually partial injective: not every column in  $B$  is mapped from  $A$ , not every column in  $A$  is mapped to  $B$ . For further details, please refer to Yan & He (2020). **Implementation details.** We randomly sample columns with replacement from our entire collection of tables, generating a fixed column pool  $C$ . We retain half the rows of  $A$  to provide as context to the LLM. The remaining rows are used to generate a new table  $B$ . For each instance, we randomly sample columns from both the target table and the column pool and join them to  $B$ . We anonymize the column names in  $B$ , then pass both  $A$  and  $B$  to the LLM and ask it to return a valid join mapping  $M$ . **Metrics.** We report the F1 score over columns, with TPs scored as exact matches between ground truth and the LLM output, FPs scored as extraneous mappings, FNs scored as missing mappings, and incorrect mappings counting as FP + FN.

### A.3.5 INSTRUCTION FOLLOWING

An important ability of an LLM is its capability to follow instructions. To this end, we include instruction following questions in our benchmark, inspired by IFEval (Zhou et al., 2023a).

**Generating live prompts and instruction.** IFEval, or instruction-following evaluation for LLMs, contains verifiable instructions such as “write more than 300 words” or “Finish your response with this exact phrase: {end\_phrase}.” These instructions are then appended to prompts like “write a short blog about the a visit in Japan”. We use this modular nature between the prompt and instruction to construct live prompts.

For our live source, we considered news articles from The Guardian; we are able to obtain 200 articles using their API<sup>1</sup>. Using the first  $n$  sentences article text as the source text, we consider four different tasks using the text: paraphrase, summarize, simplify, and story generation. The exact prompts can be seen in Table 12. For the instructions, we use the code provided by Zhou et al. (2023a), making a few modifications such as increasing the max number of keywords from two to five. Additionally, we compose different instructions together by sampling from a uniform distribution from 2 to 5. However, since the instructions can be conflicting, we deconflict the instructions. This results in approximate normal distribution of the number of instructions per example with the majority of the containing two or three instructions. A full list of the instructions can be found in Appendix Table 3. To construct, the full prompt, containing the news article sentences, the prompt, and the instructions, we use the following meta prompt: “The following are the beginning sentences of a news article from the Guardian.\n——\n{guardian article}\n——\n{subtask prompt} {instructions}”.

**Scoring.** To evaluate the model’s performance on instruction following, we use a scoring method that considers two key factors: whether all instructions were correctly followed for a given prompt, i.e. Prompt-level accuracy, and what fraction of the individual instructions were properly handled, i.e. Instruction-level accuracy. The first component of the score checks if the model successfully followed every instruction in the prompt and assigns 1 or 0 if it missed any of the instructions. The second component looks at each individual instruction and checks whether it was properly followed or not. The final score is the average of these two components, scaled to lie between 0 and 1. A score of 1 represents perfect adherence to all instructions, while lower scores indicate varying degrees of failure in following the given instructions accurately.

<sup>1</sup><https://open-platform.theguardian.com/>

1566 Table 12: The prompt for each subtask used in each of the four instruction following tasks.  
1567

1568 Subtask	1568 Subtask Prompt
1569 Paraphrase	1569 Please paraphrase based on the sentences provided.
1570 Summarize	1570 Please summarize based on the sentences provided.
1571 Simplify	1571 Please explain in simpler terms what this text means.
1572 Story Generation	1572 Please generate a story based on the sentences provided.

1573  
1574  
1575  
1576 Example questions from the Instruction Following category can be lengthy, so examples can be  
1577 viewed [here](#).  
1578

### 1579 A.3.6 LANGUAGE COMPREHENSION

1580  
1581 Finally, we include multiple language comprehension tasks. These tasks assess the language model’s  
1582 ability to reason about language itself by, (1) completing word puzzles, (2) fixing misspellings while  
1583 leaving other stylistic changes in place, and (3) reordering scrambled plots of unknown movies.  
1584

1585 **Connections.** First we include the ‘Connections’ category<sup>2</sup>. Connections is a word puzzle category  
1586 introduced by the New York Times (although similar ideas have existed previously). Sixteen words  
1587 are provided in a random order; the objective of the game is to sort these into four sets of four  
1588 words, such that each set has a ‘connection’ between them. Such connections could include the  
1589 words belonging to a related category, e.g., ‘kiwi, grape, pear, peach’ (types of fruits); the words  
1590 being anagrams, the words being homophones, or being words that finish a certain context, e.g.,  
1591 ‘ant, drill, island, opal’ being words that come after the word ‘fire’ to make a phrase. Due to the  
1592 variety of possible connection types that can exist, the wider knowledge required to understand  
1593 some connections, as well as some words potentially being ‘red herrings’ for connections, this task  
1594 is challenging for LLMs – prior work (Todd et al., 2024) has comprehensively tested the task on  
1595 the GPT family of models, as well as on sentence embedding models derived from, e.g., BERT  
1596 (Devlin et al., 2018) and RoBERTa (Liu et al., 2019). The authors found that GPT-4 has an overall  
1597 completion rate below 40% on the puzzles (when allowed multiple tries to get it correct), concluding  
1598 that ‘large language models in the GPT family are able to solve these puzzles with moderate reliability,  
1599 indicating that the task is possible but remains a formidable challenge.’ In our work, we assess the  
1600 single-turn performance and test performance on a much larger set of models.

1601 The original task provided for a number of ‘retry’ attempts in the event of an incorrect submission for  
1602 a category. To fit into the framework of our benchmark we take the model’s answer from a single turn;  
1603 to ameliorate the increased difficulty of this setting, we use fewer words/groups for some questions.  
1604 The split we use is 15 questions of eight words, 15 questions of twelve words and 20 questions of  
1605 sixteen words. An example prompt is as follows:

1606 **An example question from the Connections task.**

1607 You are given 8 words/phrases below. Find two groups of four items that share something  
1608 in common. Here are a few examples of groups: bass, flounder, salmon, trout (all four  
1609 are fish); ant, drill, island, opal (all four are two-word phrases that start with ‘fire’); are,  
1610 why, bee, queue (all four are homophones of letters); sea, sister, sin, wonder (all four  
1611 are members of a septet). Categories will be more specific than e.g., ‘5-letter-words’,  
1612 ‘names’, or ‘verbs’. There is exactly one solution. Think step-by-step, and then give your  
1613 answer in **\*\*bold\*\*** as a list of the 8 items separated by commas, ordered by group (for  
1614 example, **\*\*bass, founder, salmon, trout, ant, drill, island, opal\*\***). If you don’t know  
1615 the answer, make your best guess. The items are: row, drift, curl, tide, current, press, fly,  
1616 wave.

1617 **Ground Truth:** current, drift, tide, wave, curl, fly, press, row

1618 The score for this task is the fraction of groups that the model outputs correctly.  
1619

<sup>2</sup>See <https://www.nytimes.com/games/connections>.

1620 **Typo corrections.** Next, we include details about the `Typos` task. The idea behind this task is  
1621 inspired by the common use-case for LLMs where a user will ask the system to identify typos and  
1622 misspellings in some written text. The challenge for the systems is to fix just the typos or misspellings,  
1623 but to leave other aspects of the text unchanged. It is common for the LLM to impose its own writing  
1624 style onto that of the input text, such as switching from British to US spellings or adding the serial  
1625 comma, which may not be desirable.

1626 To create the questions for this task, we take text from recent ArXiv abstracts. These abstracts may  
1627 themselves start with misspellings and grammatical errors. Therefore, our first step is to manually  
1628 pass over the abstracts and fix typos and grammar issues. Next, we assemble a list of common  
1629 misspellings as found online. This is done so as to replicate common misspellings performed by  
1630 humans, even though we synthetically generate the questions. Finally, for each question, we sample a  
1631 probability  $p \sim U(0.5, 0.7)$  of flipping correctly spelled words to misspelled words. We then use that  
1632 probability to replace every correctly spelled word with a common misspelling with that probability  
1633  $p$ . This allows there to be variability in the difficulty of the problem included in the benchmark. In  
1634 our first release, we include 50 questions. Finally, to score this problem, we merely ask whether the  
1635 ground truth abstract is contained in the output provided by the LLM.

1636 **An example question from the `Typos` task.**

1637 Please output this exact text, with no changes at all except for fixing the misspellings.  
1638 Please leave all other stylistic decisions like commas and US vs British spellings as in  
1639 the original text.

1640 We introduce the concept of a  $k$ -token signed graph and study some of its combinatorial  
1641 and algebraic properties. We prove that two switching isomorphic signed graphs have  
1642 switching isomorphic token graphs. Moreover, we show that the Laplacian spectrum of a  
1643 balanced signed graph is contained in the Laplacian spectra of its  $k$ -token signed graph.  
1644 Besides, we introduce and study the unbalance level of a signed graph, which is a new  
1645 parameter that measures how far a signed graph is from being balanced. Moreover,  
1646 we study the relation between the frustration index and the unbalance level of signed  
1647 graphs and their token signed graphs.

1648 **Ground Truth:** We introduce the concept of a  $k$ -token signed graph and study some  
1649 of its combinatorial and algebraic properties. We prove that two switching isomorphic  
1650 signed graphs have switching isomorphic token graphs. Moreover, we show that the  
1651 Laplacian spectrum of a balanced signed graph is contained in the Laplacian spectra  
1652 of its  $k$ -token signed graph. Besides, we introduce and study the unbalance level of a  
1653 signed graph, which is a new parameter that measures how far a signed graph is from  
1654 being balanced. Moreover, we study the relation between the frustration index and the  
1655 unbalance level of signed graphs and their token signed graphs.

1656 **Plot unscrambling.** Finally, we include a movie synopsis unscrambling task. We obtain movie plot  
1657 synopses from IMDb or Wikipedia for feature-length films released after January 1st 2024. These  
1658 synopses are then split into their constituent sentences and are randomly shuffled. The lengths of the  
1659 synopses vary from as few as 7 sentences to as many as 66 sentences; at the upper end, this is a very  
1660 challenging task. The LLM is provided the shuffled sentences with the prompt: ‘The following plot  
1661 summary of a movie has had the sentences randomly reordered. Rewrite the plot summary with the  
1662 sentences correctly ordered. Begin the plot summary with `<PLOT_SUMMARY>`.’.

1663 Scoring the task involves two decision points: 1) how to deal with transcription errors - those in which  
1664 the model modifies the lines when producing its output 2) given the ground truth ordering of sentences  
1665 and the LLM’s ordering, choosing an appropriate scoring metric. For 1), one option is to permit  
1666 only strict matching – that is, the LLM must transcribe perfectly. However, although the strongest  
1667 models do perform well on this (we find they achieve over 95% transcription accuracy), we find that  
1668 LLMs often correct grammatical errors or spelling mistakes in the source data when transcribing.  
1669 As we are primarily interested in testing the models’ capabilities for *causal language reasoning* in  
1670 this task, rather than precise transcription accuracy, we instead apply a fuzzy-match using `diff`  
1671 (Team, c) to determine the closest match using a version of the Ratcliff/Obershelp algorithm (Ratcliff  
1672 & Metzener, 1988). For 2), we calculate the score as  $1 - \frac{d}{n\_sentences\_gt}$ , where `n_sentences_gt` is the  
1673 number of sentences in the ground truth synopsis, and  $d$  is the Levenshtein distance (Levenshtein,  
1966) of the model’s sentence ordering to the ground truth synopsis ordering. Thus if the model’s

Table 13: Summary for tasks in LiveBench.

Category	Task	Num.	Data Source
data_analysis	cta	50	Kaggle and Socrata datasets
data_analysis	tablejoin	50	Kaggle and Socrata datasets
data_analysis	tablereformat	50	Kaggle and Socrata datasets
instruction_following	summarize	50	The Guardian articles
instruction_following	paraphrase	50	The Guardian articles
instruction_following	story_generation	50	The Guardian articles
instruction_following	simplify	50	The Guardian articles
language	typos	50	ArXiv abstracts
language	connections	50	NYT daily puzzles
language	plot_unscrambling	40	IMDb plot synopses
reasoning	web_of_lies_v2	50	N/A (synthetic)
reasoning	zebra_puzzle	50	N/A (synthetic)
reasoning	spatial	50	N/A (manually created)
math	olympiad	36	International Olympiad 2024
math	AMPS_Hard	100	N/A (synthetic)
math	math_comp	96	AMC 2023 and AIME 2024
coding	coding_completion	50	LiveCodeBench
coding	LCB_generation	78	LiveCodeBench and Leetcode

sentence ordering perfectly matches the ground truth, the distance  $d$  would be 0, and the score would be 1 for that sample.

One might think that it is plausible that synopsis unscrambling cannot always be solved with the information provided. However, note that even if the set of sentences do not create a distinct causal ordering, the task is essentially asking the LLM to maximize the probability that a given arrangement of sentences is a real movie. In addition to causal reasoning, the LLM can use subtle cues to reason about what ordering creates the most compelling plot. Furthermore, even if there does exist an upper bound on the score that can be achieved that is strictly below 100%, it can still be a useful metric for distinguishing models' relative strengths. An analogous metric is that of next-token perplexity in language modelling; although it is likely that a perfect prediction of the next token is impossible to achieve, and we do not even know what the obtainable lower bound on perplexity is, it is still a powerful metric for determining language-modelling performance.

Example questions from the plot unscrambling task can be lengthy, so examples can be viewed in our repo [here](#).

In Table 13, we also present a summary table consisting of the number of questions and source data for each task in LiveBench.

#### A.4 GRADING METHODOLOGY

LiveBench makes use of automatic regex-based grading methods in order to avoid the biases and other downsides of LLM judging, as detailed in Section 1. On the other hand, automated grading methods have two main pitfalls, which we take care to circumvent. The first is that an instruction-following element is added to the task. For example, a reasoning task with a complex answer instruction format tests instruction-following as well as reasoning, rather than pure reasoning. The second is that care must be made to allow for different answer formats so as not to favor a particular LLM (even after giving exact, unambiguous instructions in the prompt, regarding the format of the answer).

When creating questions, we make sure that the prompt is written in such a way that the answer format is fully specified and unambiguous. We typically give an example of the answer format in the prompt, and specify any potential parts that are unclear.



---

1728 Additionally, our grading methodology is designed to be fully permissive, accommodating all answer  
1729 formats within reason. As a rule of thumb, if a human reading the LLM’s answer would be able to  
1730 comprehend the answer (and assuming it is correct), then the answer should be marked correct. For  
1731 example, in our math category, models can respond with answers in either latex ‘boxed{ }’ or ‘fbox{ }’  
1732 environments. For multiple choice questions, we ask for the letter answer, but we accept either the  
1733 letter or the raw answer. The reason for our less-strict judging is because some models may have  
1734 been instruction-tuned to a particular format, giving them an advantage or disadvantage. We achieved  
1735 this by using flexible regex patterns that capture different notation styles or response structures. This  
1736 approach allows us to evaluate models based on their task-specific skills, rather than their ability to  
1737 follow specific instructions.

1738 In order to ensure a given task is not overly testing instruction following (in addition to its actual  
1739 category), and also to ensure scoring accuracy and fairness, we regularly manually inspect a random  
1740 sample of responses which were labeled incorrect for each model. We look for common answer  
1741 formats that are incorrect and not picked up by the regex-based parser. This allows us to regularly  
1742 improve our automatic scoring functions to admit as many answer formats as possible, within reason.

1743 We continue to monitor model outputs and update scoring functions as needed to capture answers  
1744 appropriately. When adding new models or tasks to the benchmark, we re-evaluate and refine scoring  
1745 methodologies to ensure fairness and accuracy. This ongoing evaluation and maintenance process  
1746 enables us to maintain the integrity of our benchmark, providing a comprehensive assessment of  
1747 models’ strengths and weaknesses. By decoupling instruction following capabilities from task-specific  
1748 evaluations, we can accurately evaluate and compare models across various tasks and categories.

#### 1749 A.5 QUALITY CONTROL FOR NEW MODELS

1750 When integrating new models into LiveBench, we conduct thorough quality control to ensure  
1751 consistent and accurate evaluation. This process guarantees that our benchmark remains reliable and  
1752 effective in assessing model capabilities.  
1753

1754 **New Model Setup** We perform all setup in order to accurately run inference on the model. New  
1755 models come with a README or example code on the chat template, system message, and hyperpa-  
1756 rameters to run the model, and so we match this setup in LiveBench’s code. For API models from an  
1757 existing model family, there is typically very little additional setup. For an API model from a new  
1758 family, such as the O1 series, we add the same hyperparameters, system message, etc., as its example  
1759 code. Similarly, for open-weight models, we make sure to match the published example code. Note  
1760 that we generally prefer to use (trusted) APIs, even for open-weight models, because APIs are more  
1761 controlled and fewer things can go wrong. As an example, new models occasionally have bugs when  
1762 they are first released.

1763 **Model Output Evaluation** Next, we evaluate the new model on LiveBench and compare the new  
1764 model’s scores to other models of similar average score, or models from the same family or base. We  
1765 look for tasks that scored unusually low, relative to similar models. This is not a comprehensive test,  
1766 but it helps to more quickly flag tasks that have an unexpectedly low result, to debug potential errors  
1767 in the parsing code.  
1768

1769 **Manual Verification** Next, we manually inspect the incorrect answers from the flagged tasks above,  
1770 as well as a random sample of the responses across all tasks. The goal is to make sure that the wrong  
1771 answers are truly incorrect, rather than a correct answer in the wrong format, or in such a way that it  
1772 is marked incorrect by the parsing function. (Note that these checks are focused on catching false  
1773 negatives. It is extremely unlikely for a false positive to occur, but we checked for false positives in  
1774 the initial development of LiveBench, and occasionally check answers that are scored correct, for this  
1775 reason.)  
1776

1777 **Scoring Function Updates** Based on our evaluation and verification, we update our scoring  
1778 functions to accommodate any unique response patterns or notation styles exhibited by the new  
1779 model. This maintains the permissiveness and fairness of our grading methodology, ensuring accurate  
1780 scoring. Note that we made a few such updates when new models came out that hit new edge cases  
1781 of our scoring functions, in the first month of LiveBench’s release, but now we have not needed to  
make a scoring function update for a few months.

Table 14: Description for whether tasks in LiveBench can be updated automatically.

Category	Task	Can be updated automatically using a script?
data_analysis	cta	Yes - replace with newer datasets
data_analysis	tablejoin	Yes - replace with newer datasets
data_analysis	tablereformat	Yes - replace with newer datasets
instruction_following	summarize	Yes - replace with newer articles and/or update synthetic generation script
instruction_following	paraphrase	Yes - swap out news articles and/or update synthetic generation script
instruction_following	story_generation	Yes - swap out news articles and/or update synthetic generation script
instruction_following	simplify	Yes - swap out news articles and/or update synthetic generation script
language	typos	Yes - replace with newer paper abstracts
language	connections	Yes - replace with newer (daily) puzzles
language	plot_unscrambling	Yes - replace with newer imdb plot summaries
reasoning	web_of_lies_v2	Yes - rerun (and/or update) the synthetic generation script
reasoning	zebra_puzzle	Yes - rerun (and/or update) the synthetic generation script
reasoning	spatial	No - create new questions by hand
math	olympiad	Yes* - rerun (and/or update) synthetic generation script, but source can only be updated yearly
math	AMPS_Hard	Yes - rerun (and/or update) the synthetic generation script
math	math_comp	Yes* - but can only be updated yearly, or by using different contests
coding	coding_completion	Yes - replace with more recent LeetCode questions
coding	LCB_generation	Yes - replace with more recent LeetCode questions

**Re-Running the Evaluation Pipeline** After potentially updating scoring functions for some tasks, we re-score all models with the new scoring functions. This ensures consistent and accurate results.

## A.6 QUESTION UPDATE POLICY

To ensure the continued relevance and effectiveness of LiveBench, we have implemented a thorough question update policy. That said, we still maintain a degree of flexibility in updating questions, as well as updating the LiveBench policies as a whole, in order to be able to adapt to new developments and trends in the field (such as the release of models that employ search at inference time, or the popularity of a new type of LLM capability). In this section, we give more details on the update policy laid out in Section 2.7.

**Regular Updates** We update questions and tasks on a monthly basis, incorporating new and challenging prompts that reflect the evolving landscape of large language models.

In each update, we replace  $\frac{1}{6}$  of the questions on average, so that the benchmark is fully refreshed roughly every 6 months. We may speed up the turnover rate of questions in the future, based on interest in LiveBench. Each month, we do not release the new questions until one month later, so that the public leaderboard always has  $\frac{1}{6}$  questions that are private and completely contamination-free.

We choose tasks to update based primarily on two factors: (1) the oldest tasks, and (2) the currently easiest tasks. In this way, the questions in LiveBench will stay new and continue to challenge the most capable LLMs. We also update tasks if there is any suspected contamination or other reason for updating a task. Nearly all tasks can be updated simply by running a script. See Table 14 for a breakdown of each task. Although most tasks can be automatically updated with a script, we always modify the generation script when creating new questions, in order to make sure that the distribution of questions is different and harder over time.

**Evaluation Re-Runs** After updating questions and tasks, we re-run the evaluation pipeline on all models, ensuring consistent and accurate results. By implementing this comprehensive question update policy, we guarantee that LiveBench remains a vibrant, dynamic, and relevant benchmark for evaluating large language models.

**Version Control** We maintain version control over all updates, ensuring transparency and reproducibility. This allows researchers to track changes and compare results across different versions of LiveBench.

**Community Engagement** We encourage community engagement and collaboration in expanding and improving LiveBench. Researchers and developers can contribute new tasks, provide feedback on existing ones, and participate in shaping the benchmark’s evolution.

---

## 1836 A.7 CONTAMINATION IN LIVEBENCH

1837

1838 We point out two different definitions of contamination: (1) *test set contamination*, and (2) *task*  
1839 *contamination* – or train test distribution similarity.

1840

1841 The first definition is the one that we use in Section 1: when the test data (the questions and answers  
1842 from the benchmark) are present in the training data itself. This is the definition that is commonly  
1843 used in the literature, often called ‘data contamination’, ‘data leakage’, ‘test set contamination’, or  
1844 even simply ‘contamination’ (Oren et al., 2023; Singh et al., 2024; Kalal et al., 2024; Golchin &  
1845 Surdeanu, 2023a).

1846

1847 The second definition is related to the question: how well do LLMs generalize today? A low level  
1848 of generalization is, e.g., training on AMC questions, and generalizing the same questions where  
1849 the order of the answer choices, and other prose in the questions, are changed, while a high level  
1850 of generalization is, e.g., training on AMC 12A 2023 and testing on AMC 12A 2024. The latter  
1851 example, despite LLMs already exhibiting some degree of this type of high generalization, is still  
1852 ‘fair game’ with respect to pretraining and fine-tuning: many LLMs are trained on competitive math  
1853 problem tasks and then evaluated on new, unseen test problems from the same distribution.

1854

1855 Despite it being accepted practice, we attempt to guard against excessive uses of (2): we do not  
1856 publicly release any of the code used to generate LiveBench questions, we always modify the  
1857 generating code when updating the LiveBench questions (making the questions harder), and we do  
1858 not publicly release the new questions for one month.

1859

1860 We also acknowledge that LiveBench does *not* fully satisfy (1): while nearly all questions are from  
1861 June 2024 or more recent, there are some coding questions from November 2023, and the AMC  
1862 questions have only undergone a low level of modification from their November 2023 version.  
1863 Therefore, a limited fraction of LiveBench is likely contaminated on all recent LLMs.

1864

1865

1866

1867

## 1868 B ADDITIONAL DOCUMENTATION

1869

1870

1871

1872

1873

1874

1875

1876

1877

1878

1879

1880

1881

1882

1883

1884

1885

1886

1887

1888

1889

1890

1891

1892

1893

1894

1895

1896

1897

1898

1899

1900

1901

1902

1903

1904

1905

1906

1907

1908

1909

1910

1911

1912

1913

1914

1915

1916

1917

1918

1919

1920

1921

1922

1923

1924

1925

1926

1927

1928

1929

1930

1931

1932

1933

1934

1935

1936

1937

1938

1939

We include a datasheet (Geburu et al., 2021) for LiveBench in <https://anonymous.4open.science/r/LiveBench/>.

1890 Table 15: Statistics for tasks in LiveBench. This table gives the number of questions  
 1891 for each task, as well as the mean and std. dev number of output tokens per question for  
 1892 gpt-4-turbo-2024-04-09.

Category	Task	Num.	Input Tokens		Output Tokens	
			Mean	Std. Dev.	Mean	Std. Dev.
data_analysis	cta	50	879.52	1294.81	2.42	1.36
data_analysis	tablejoin	50	3111.28	1186.58	58.06	35.03
data_analysis	tablereformat	50	1395.54	814.92	475.64	333.57
instruction_following	summarize	50	1818.92	462.22	218.46	110.38
instruction_following	paraphrase	50	1805.62	501.30	267.98	101.98
instruction_following	story_generation	50	1794.30	474.77	405.24	156.49
instruction_following	simplify	50	1835.42	486.83	226.00	114.61
language	typos	50	1291.72	402.04	207.24	74.25
language	connections	50	884.54	48.94	422.06	541.96
language	plot_unscrambling	40	3545.68	1333.37	613.70	166.17
reasoning	web_of_lies_v2	50	1670.64	337.40	490.82	98.68
reasoning	zebra_puzzle	50	1407.20	281.02	616.94	105.61
reasoning	spatial	50	450.48	134.30	337.88	88.16
math	olympiad	36	4646.08	1579.41	1221.22	685.41
math	AMPS_Hard	100	193.86	91.39	561.26	249.80
math	math_comp	96	678.20	243.09	664.27	424.33
coding	coding_completion	50	2659.30	718.70	67.08	46.00
coding	LCB_generation	78	2159.88	796.14	213.44	154.34
Total		1000	1612.27	703.73	394.85	261.79

1917 Table 16: Prices for running GPT and Claude models on LiveBench. This table gives the ap-  
 1918 proximate cost for running models on LiveBench as of Oct 1, 2024. Note that we used the  
 1919 gpt-4-turbo tokenizer for all computations, so all other prices are approximate.

Model	Price in USD
o1-preview-2024-09-12	≈ 47.87
o1-mini-2024-09-12	≈ 9.57
gpt-4o-2024-05-13	≈ 13.98
gpt-4-turbo-2024-04-09	27.97
gpt-4-1106-preview	≈ 27.97
gpt-3.5-turbo-0125	≈ 1.40
claude-3-opus	≈ 53.80
claude-3-5-sonnet	≈ 10.76
claude-3-sonnet	≈ 10.76
claude-3-haiku	≈ 0.90

## 1934 B.5 BENCHMARK STATISTICS

1935 Here, we give statistics on the number of questions and average number of output tokens per task,  
 1936 and the total cost of running LiveBench with common API models. For the number of questions  
 1937 for each task, as well as the mean and std. dev number of input and output tokens per question for  
 1938 gpt-4-turbo-2024-04-09, see Table 15. Across the 1000 questions in our current problem  
 1939 set, the mean number of input tokens per question was 1612, and the mean number of output tokens  
 1940 was 395. See Table 16 for the price to run GPT and Claude models on LiveBench, as of October 1,  
 1941 2024. o1-preview-2024-09-12 is the most expensive at \$47.87, while claude-3-haiku  
 1942 is the cheapest, at \$0.90.