

# VISUALLY CONSISTENT HIERARCHICAL IMAGE CLASSIFICATION

Seulki Park<sup>1</sup>, Youren Zhang<sup>1</sup>, Stella X. Yu<sup>1,2</sup>, Sara Beery<sup>3</sup>, Jonathan Huang<sup>4</sup>

<sup>1</sup>University of Michigan <sup>2</sup>UC Berkeley <sup>3</sup>MIT <sup>4</sup>Scaled Foundations  
{seulki,yourenz,stellayu}@umich.edu, beery@mit.edu, jhuang11@gmail.com

## ABSTRACT

Hierarchical classification requires predicting an entire taxonomy, demanding both per-level accuracy and cross-level consistency. However, per-level accuracy often suffers because different levels rely on distinct visual cues, making it a multi-task problem. For example, identifying specific bird species (*e.g.*, *Anna’s hummingbird*) depends on localized features like head and neck color, while distinguishing a *bird* from a *plant* requires global features like feathers versus leaves. Existing methods address this by using separate model components for each level, but this often leads to *inconsistencies*, as classifiers focus on unrelated regions.

Our key insight is that classification across levels should be grounded in consistent visual cues that link fine details to broader structures. Instead of treating fine and coarse classification separately, our model first captures key details (*e.g.*, beak, wings) for species recognition, then integrates them into global features (*e.g.*, bird shape) for higher-level classification. For this, we introduce a hierarchical model that aligns fine-to-coarse *semantic parsing* with consistent *visual segmentation*. Additionally, we propose a tree-path KL divergence loss to enforce semantic consistency across levels. Our approach significantly outperforms zero-shot CLIP and other state-of-the-art methods on hierarchical classification benchmarks.

## 1 INTRODUCTION

Hierarchical classification (Silla & Freitas, 2011; Chang et al., 2021; Jiang et al., 2024) aims to predict an entire taxonomy (*e.g.* *Birds* → *Hummingbird* → *Green hermit*) rather than a single label, making it crucial in real-world applications (Fig. 1). The required level of detail varies by context—non-experts may only need a coarse label like *Bird*, while experts such as biologists require fine-grained predictions like *Green hermit*. Moreover, single-level fine-grained classification often fails in ambiguous scenarios, such as birds viewed from a distance or in motion. In such cases, a model capable of full-taxonomy predictions offers greater robustness and adaptability.

However, hierarchical classification presents a key challenge: different classification levels rely on distinct visual cues, making it a multi-task problem. For example, distinguishing *Bird* from *Plant* requires global features like feathers and leaves, whereas differentiating between fine-grained species,

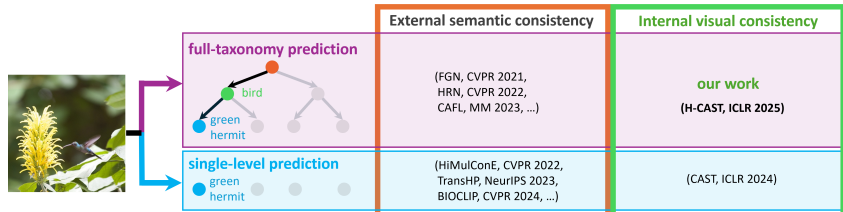
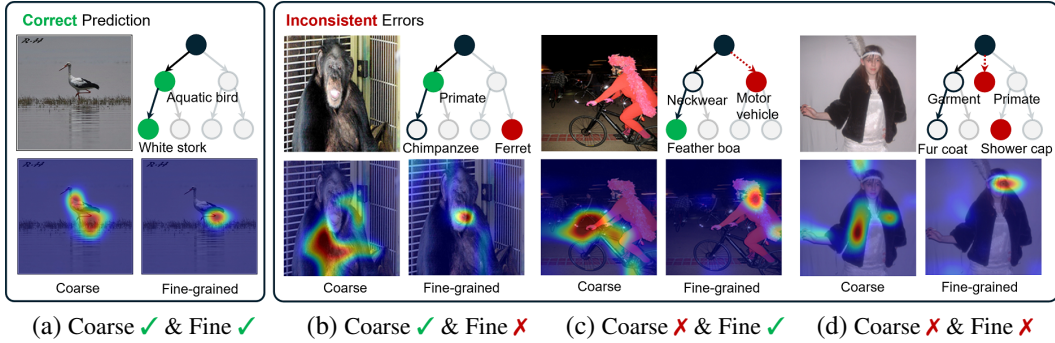


Figure 1: **We introduce internal visual consistency to align visual focus across levels in hierarchical classification.** Unlike single-level classification, hierarchical classification predicts labels at multiple levels of a taxonomy. When multiple objects appear in an image (*e.g.*, *bird* and *flower*), it is important that all levels focus on the same object to ensure semantic coherence. To encourage this, we introduce internal visual consistency, which aligns visual focus across levels.

Code available at <https://github.com/pseulki/hcast>.



**Figure 2: Inconsistent predictions often stem from misaligned visual attention across hierarchical levels.** We show Grad-CAM visualizations (Selvaraju et al., 2017) of FGN (Chang et al., 2021) trained on BREEDS (Entity-30) (Santurkar et al., 2021). In the consistent case (a), both classifiers attend to the same object: the fine-grained classifier captures distinguishing details (e.g., tail), while the coarse classifier attends to the broader shape of a bird. However, in (b), the coarse classifier correctly identifies the general region but fails to capture crucial fine details of a chimpanzee. In (c), the fine-grained classifier focuses on the right detail (e.g., top and bottom of the feather boa), but the coarse classifier fails to capture the correct shape, focusing on unrelated parts like the bicycle handlebars and frame. Similar inconsistencies appear in (d), where classifiers rely on misaligned visual cues. These observations demonstrate that **semantic performance is closely tied to consistent visual grounding**. To address this, we propose a model that ensures both classifiers attend to the coherent region while capturing different details, leading to correct predictions across all cases (a-d).

such as *Anna’s hummingbird* and *Green hermit*, depends on subtle localized details like head and neck color. This problem is further compounded when multiple objects appear in an image (Fig. 1), as different levels may attend to different objects, leading to inconsistent predictions.

To address this, existing methods focus on enforcing **semantic consistency** across levels by designing separate model components for each hierarchy level (Chang et al., 2021; Chen et al., 2022; Wang et al., 2023a). While improving fine-grained accuracy in hierarchical classification, this approach often leads to **inconsistent predictions across levels**, where the model’s outputs do not align with the hierarchical taxonomy. Fig. 2 (b, c, d, top) illustrates such inconsistencies when training FGN (Chang et al., 2021) on the two-level hierarchy dataset BREEDS (Entity-30) (Santurkar et al., 2021). For example, in (c), the coarse classifier predicts *Motor Vehicle*, while the fine-grained classifier predicts *Feather Boa*, demonstrating how independently optimized levels can lead to contradictions.

To understand these inconsistencies, we show Grad-CAM visualizations (Selvaraju et al., 2017) and find that coarse and fine-grained classifiers often focus on entirely different regions (Fig. 2, bottom). For example, in case (c), the fine-grained classifier correctly attends to the *feather boa*, while the coarse classifier focuses on the bicycle’s handlebars and frame, mistaking them for key features instead of capturing the broader shape of the feather boa, leading to a misclassification as *Motor Vehicle*. In contrast, in the consistently correct case (Fig. 2 (a)), the coarse classifier captures the bird’s shape, while the fine-grained classifier focuses on its legs, ensuring visually consistent attention across levels. We frequently observe this pattern and provide quantitative validation in Appendix A.

From this observation, we argue that hierarchical classification benefits when coarse and fine-grained classifiers maintain **visual consistency, focusing on the same object at different levels of detail**. Based on this insight, we propose a novel method that aligns their focus areas, rather than training them as separate components (Fig. 3, right). For instance, while the fine-grained classifier examines localized details like the *beak*, *wings*, and *tail* to classify *Green Hermit*, the coarse classifier differentiates between *birds* and *plants* by integrating these details into the bird’s overall *body shape*. To enforce this structured visual parsing, we propose an integrated model that progressively groups fine-grained details into coarser shapes while transferring learned features across levels. This hierarchical learning scheme effectively mitigates inconsistencies compared to prior methods, which process each level independently.

To identify and group relevant visual details, we leverage CAST (Ke et al., 2024), an unsupervised segmentation method that groups related pixels consistently through internal parsing without requiring

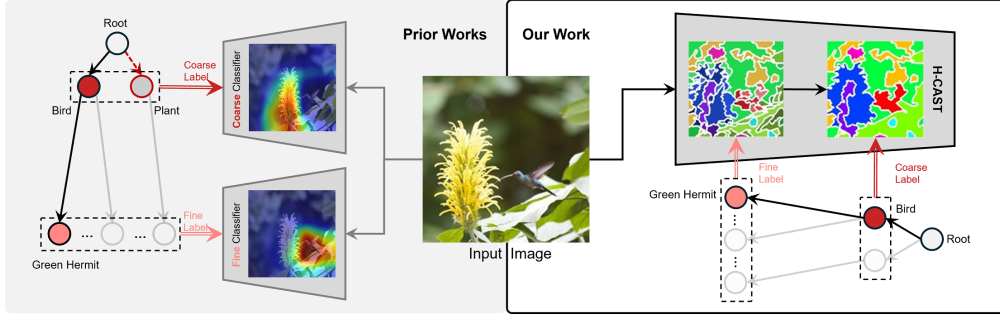


Figure 3: **Prior methods enforce consistency using external semantic losses but often suffer from visual misalignment. In contrast, our approach ensures internal visual consistency by aligning coarse and fine-grained classifiers through internal visual parsing, grouping fine details into coarser representations.** In the segmentation images inside our model, consistent groupings are represented by identical colors. The 32-way and 8-way segmentation results illustrate this process: at the fine level (32-way), the **red bird** is divided into finer segments such as **wings, body, head, and tail**. At the coarser level (8-way), these details merge into a single **bird** representation. By leveraging this consistent internal parsing, we encourage the model to focus on the coherent regions within images.

segmentation labels. Inspired by this, we introduce Hierarchical-CAST (H-CAST), which uses fine-to-coarse semantic parsing to align classifier focus across levels. To the best of our knowledge, our work is **the first to address internal visual consistency in hierarchical classification using unsupervised semantic segments** (Fig. 1). Since our method is an integrated model, if details initially captured at the fine-grained level are incorrect, it will receive negative signals (errors) during the learning process toward coarser levels. As training processes, the model is encouraged to capture accurate fine-grained details to improve overall hierarchical classification performance.

Additionally, we propose Tree-path KL Divergence loss that further enhances **semantic consistency** by ensuring predictions remain aligned with the taxonomy across levels. As a result, our method consistently produces correct predictions across all cases in Fig. 2.

First, we evaluate CLIP (Radford et al., 2021) and show that even vision foundation models struggle with inconsistent hierarchical classification. To assess both accuracy and consistency, we introduce a new metric, Full-Path Accuracy (FPA), which measures the proportion of samples correctly predicted at all hierarchy levels. Validated on standard benchmarks, our method outperforms state-of-the-art models, achieving 10+ percentage points higher FPA than ViT-based baselines on BREEDS, ensuring superior consistency and robustness. We validate its effectiveness through extensive experiments and analysis. Additionally, we show that hierarchical semantic taxonomy enhances image segmentation.

**Our contributions.** 1) We introduce **internal visual consistency**, aligning fine-to-coarse semantic parsing with consistent visual segmentation to ensure classifiers across levels focus on coherent and related regions. 2) We propose a **Tree-Path KL Divergence Loss** to enforce semantic consistency across hierarchy levels. 3) Our method significantly outperforms ViT-based baselines, achieving +3–10% FPA across all datasets, demonstrating superior consistency and robustness.

## 2 RELATED WORK

**Hierarchical classification** problem presents a unique challenge: the image remains the same, but the output changes in the *semantic* (text) space (e.g. “Birds”→ “Hummingbird”→ “Anna’s hummingbird”). Due to this structure, prior work has primarily focused on embedding data into the semantic space, using additional loss functions (Bertinetto et al., 2020; Zeng et al., 2022) or encoding entire taxonomies as lengthy text inputs, as in BIOCLIP (Stevens et al., 2024). *In contrast*, we approach the problem from the *visual space*, exploring how hierarchical classification relates to visual grounding by ensuring consistency across different levels of detail, from fine-grained features to broader features. **This visual-grounding perspective is novel and has not been explored in prior work** (see Fig. 1). Existing hierarchical classification methods can be divided into two approaches:

**1. Single-level prediction:** Single-level prediction can be further divided into two approaches. First, fine-grained classification (bottom-up) targets fine-grained classes (leaf nodes), based on the

assumption that coarse categories can be inferred using a predefined taxonomy (Karthik et al., 2021; Zhang et al., 2022; Wang et al., 2023b; Stevens et al., 2024). While effective for clear images, it struggles with ambiguous test-time conditions when fine-grained classification is impossible (e.g., birds at high altitudes). Second, the local classifier (top-down) predicts a single label at the most confident level by refining coarse-to-fine predictions (Deng et al., 2010; Wu et al., 2020; Brust & Denzler, 2019). However, errors from coarse levels can propagate downward, limiting accuracy. We address this by predicting across the entire taxonomy for greater robustness.

**2. Full-taxonomy prediction:** predicts all levels simultaneously using a shared backbone with separate branches (Zhu & Bain, 2017; Wehrmann et al., 2018; Chang et al., 2021; Liu et al., 2022). A key challenge is maintaining label consistency. While Wang et al. (2023a) adjusted predictions to enforce consistency, separate branches process images independently, leading to misalignment. To address this, we propose a model based on consistent visual grounding. To the best of our knowledge, no prior work has utilized visual segments to resolve inconsistency in hierarchical classification.

**Unsupervised/Weakly-supervised Semantic Segmentation** aims to group pixels without pixel-level annotations or using only class labels (Hwang et al., 2019; Ouali et al., 2020; Ke et al., 2022; 2024). These works employ hierarchical grouping to achieve meaningful segmentation *without* pixel-level labels. In this field, “hierarchical” refers to part-to-whole visual grouping, where smaller units (e.g., a person’s face or arm) are grouped into larger regions (e.g., the whole body). Based on our intuition that fine-grained classifiers need more detailed information, while coarse classifiers focus on broader groupings, our approach leverages these varying types of visual grouping. To implement this, we adopt the recently proposed CAST (Ke et al., 2024), whose graph pooling naturally supports consistent visual grouping. Notably, our work introduces the novel insight that **part-to-whole spatial granularity can align with taxonomy hierarchies** (e.g., finer segments for fine-grained labels, coarser segments for coarse labels), a connection not previously explored.

Detailed related work, including **Hierarchical Semantic Segmentation** is included in Appendix B.

### 3 CONSISTENT HIERARCHICAL CLASSIFICATION

Our goal is to enhance the consistency of hierarchical recognition, thereby concurrently improving the accuracy of the model. To this end, we design a progressive learning scheme for hierarchical recognition, where the learning of each level contributes to the learning of the next level, instead of training separate models focusing on each individual level. Specifically, we address two types of inconsistency in hierarchical recognition. One is *visual inconsistency*, where classifiers at different levels attend to different regions (Fig. 3). To address this, we propose H-CAST in Section 3.1. The other is *semantic inconsistency*, where predictions at different levels are not aligned within the taxonomy (e.g., “Plant”-“Hummingbird”). For this, we propose a new Tree-path KL Divergence loss that encodes parent-child relations to handle semantic inconsistency in Section 3.2. Fig. 4 provides an overview of our method.

#### 3.1 H-CAST FOR VISUAL CONSISTENCY

The areas of focus within the image need to differ when conducting classification at the fine-grained level compared to the coarse level. When distinguishing between similar-looking species (e.g., “Green Hermit” vs. “Anna’s Hummingbird”), the fine-grained recognition requires attention to *fine details* like the bird’s beak and wings; meanwhile, at the coarse level (e.g., “bird” vs. “plant”), the attention shifts to *larger parts* such as the overall body of the bird. However, this shift in focus towards larger objects does not imply a sudden disregard for the previously focused details and a search for new larger objects. Rather, a natural approach involves combining detailed features such as the bird’s beak, belly, and wings for accurate bird recognition. Therefore, we argue that **the hierarchical model should be grounded in consistent visual cues**. From this insight, we design a model where the details learned at the fine level (e.g., bird’s beak and wings) are transferred to the coarse level as broader parts (e.g., bird’s body) through consistent feature grouping.

For internally consistent feature grouping, we build upon recent work CAST (Ke et al., 2024). CAST develops a hierarchical segmentation from fine to coarse, an internal part of the recognition process. However, their segmentation is driven by a flat recognition objective at the very end of visual parsing. We extend it by imposing fine-to-coarse semantic classification losses at different stages of segmentations throughout the visual parsing process. Our design reflects the intuition that



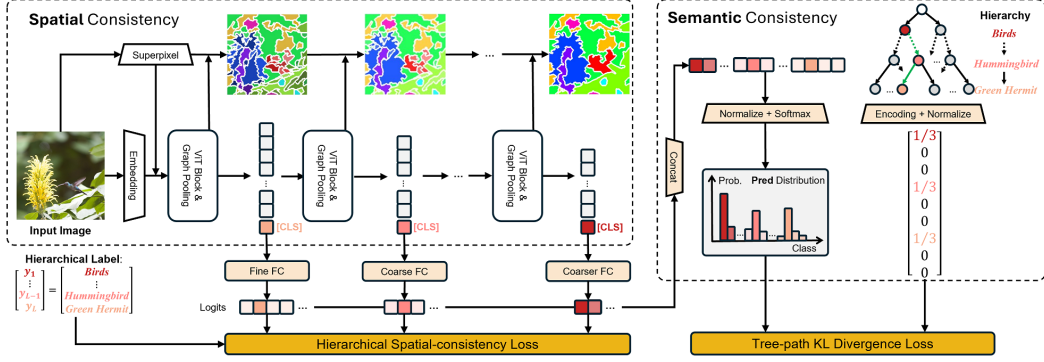


Figure 4: **Our method consists of two parts: Visual Consistency and Semantic Consistency module.** In the **Visual Consistency** module, the parsed images using superpixels are grouped based on related parts as they transition from fine to coarse levels. This guides that each hierarchical classifier focuses on the same corresponding regions while capturing different details of granularity. In the **Semantic Consistency** module, we incorporate hierarchical relationships between labels. This approach allows us to achieve consistent learning across the entire hierarchy. By promoting consistency, our method encourages classifiers at different levels to enhance overall performance, rather than conflicting with each other.

finer segments can be helpful in capturing fine-grained details (e.g., beaks and wings) required for fine-grained recognition, whereas coarser segments can be effective in representing broader features (e.g., the body of a bird) needed for coarse-grained recognition. We have a single hierarchical recognition grounded on internally consistent segmentations, each driven by a classification objective at a certain granularity. We refer to our method as *Hierarchical-CAST* (H-CAST).

Consider a hierarchical recognition task where  $x$  denotes an image associated with hierarchical labels  $y_1, \dots, y_L$ , encompassing a total of  $L$  levels in the hierarchy. Level  $L$  is the finest level (*i.e.*, leaf node), and Level 1 is the coarsest level (*i.e.*, root node). Then, given an image  $x$ , the hierarchical image recognition task is to predict labels at all levels across the hierarchy.

Let  $Z_l$  and  $S_l$  denote the feature and segments at  $l$ -th hierarchical level, respectively. Then, we obtain superpixels for image  $x$  by using the off-the-shelf algorithm SEEDS (Van den Bergh et al., 2012) to divide the image into regions with similar colors and local connectivity. These superpixels serve as input for the Vision Transformer (ViT) instead of fixed-size patches and simultaneously become the finest (initial) segments,  $S_{L+1}$ .  $l$ -th feature tokens  $Z_l$  is the concatenation of class tokens ( $Z_l^{class}$ ) and segment tokens ( $Z_l^{seg}$ ). Then, Graph pooling (Ke et al., 2024) aggregates segments with high feature similarity, allowing feature  $Z_l$  to progressively learn a more global visual context as it transitions from  $Z_L$  to  $Z_1$ .

For hierarchical recognition, we add a classification head ( $f_l$ ) consisting of a single linear layer at each level. Then, we define the Hierarchical Visual-consistency loss as the sum of  $L$  cross-entropy losses ( $L_{CE}$ ), denoted as

$$L_{HV} = \sum_{l=1}^L L_{CE}(f_l(Z_l^{class}), y_l). \quad (1)$$

Our approach differs from CAST in that while CAST uses the class token as the final objective, we design our model to incorporate hierarchical supervision during the training process. This ensures that labels from different levels progressively contribute to each other. In the Experimental section 4.6, we will demonstrate the effectiveness of our design, compared to alternative designs, including hierarchy supervision in the coarse-to-fine direction.

### 3.2 TREE-PATH KL DIVERGENCE LOSS FOR SEMANTIC CONSISTENCY

To improve semantic consistency, we propose a new loss function called Tree-path KL Divergence loss, which directly incorporates hierarchical relationships between labels. Our idea is to encode the entire hierarchical structure so that a model can learn the hierarchy by outputting the tree of hierarchy. To this end, we first concatenate labels from all levels to create a distribution, as  $Y = \frac{1}{L}[1_{y_L}; \dots; 1_{y_1}]$ , where  $1_{y_l}$  represents the one-hot encoding for level  $l$ . Next, we concatenate the outputs of each

classification head and then apply the log softmax function (LogSoftmax). We use Kullback–Leibler divergence loss ( $KL$ ) to align this output with the ground truth distribution  $Y$ . Then, TK loss is calculated as follows.

$$L_{TK} = KL(\text{LogSoftmax}([f_L(Z_L^{class}); \dots; f_1(Z_1^{class})]), Y). \quad (2)$$

This loss penalizes predictions that do not align with the taxonomy by simultaneously training on multiple labels within the hierarchy. Therefore, despite the simplicity, TK loss enables the model to enhance semantic consistency through this vertical encoding from the root (parent) node of the hierarchy level to the leaf (children) node. Our final loss becomes as follows, where  $\alpha$  is a hyperparameter to control the weight of  $L_{TK}$ ,

$$L = L_{HV} + \alpha L_{TK}. \quad (3)$$

## 4 EXPERIMENTS

First, we demonstrate that hierarchical classification is a challenging problem that cannot be easily solved by vision foundation models, which also experience inconsistent predictions. Next, we compare our method against existing approaches and flat-level baselines on hierarchical classification benchmark datasets, showing that our approach significantly outperforms them. In addition, we justify the design of our method through ablation studies. Finally, we show that hierarchical supervision can surprisingly improve semantic segmentation as well.

### 4.1 EXPERIMENTAL SETTINGS

**Datasets.** We use widely used benchmarks in hierarchical recognition: BREEDS (Santurkar et al., 2021), CUB-200-2011 (Welinder et al., 2010), FGVC-Aircraft (Maji et al., 2013), and iNat21-Mini (Van Horn et al., 2021). BREEDS, a subset of ImageNet (Russakovsky et al., 2015), includes four 2-level hierarchy datasets with different depths/parts based on the WordNet (Miller, 1995) hierarchy: Living-17, Non-Living-26, Entity-13, Entity-30. For BREEDS, we conduct training and validation using their source splits. BREEDS provide a wider class variety and larger sample size than CUB-200-2011 and FGVC-Aircraft, making it better suited for evaluating generalization performance. CUB-200-2011 comprises a 3-level hierarchy with order, family, and species; FGVC-Aircraft consists of a 3-level hierarchy including maker, family, and model (e.g., Boeing - Boeing 707 - 707-320); For experiments on a larger dataset, we used the 3-level iNat21-Mini. Details of the iNat21-Mini are provided in Sec. E.4. Table 4 in Appendix summarizes a description of the datasets.

**Evaluation Metrics.** We evaluate our models using metrics for both accuracy and consistency.

- **level-accuracy:** the proportion of correctly classified instances at each level (Chang et al., 2021).
- **weighted average precision (wAP)** (Liu et al., 2022):  $wAP = \sum_{l=1}^L \frac{N_l}{\sum_{k=1}^L N_k} P_l$ , where  $N_l$  and  $P_l$  denote the number of classes and Top-1 classification accuracy at level  $l$ , respectively. This metric considers the classification difficulty across different hierarchies.
- **Tree-based InConsistency Error rate (TICE)** (Wang et al., 2023a):  $TICE = n_{ic}/N$ , where  $n_{ic}$  denotes the number of samples with inconsistent prediction paths, and  $N$  refers to the number of all test samples. This tests whether the prediction path exists in the tree (consistency).
- **Full-Path Accuracy (FPA):**  $FPA = n_{ac}/N$ , where  $n_{ac}$  refers to the number of samples with all level of labels correctly predicted. This metric evaluates **both accuracy and consistency, ultimately representing our primary metric of interest.**

The difference between FPA and TICE is illustrated in Table 6 in Appendix.

**Comparison methods.** First, we evaluate our H-CAST with representative models in hierarchical classification, FGN (Chang et al., 2021) and HRN (Chen et al., 2022). FGN uses level-specific heads to avoid negative transfer across granularity levels, while HRN employs residual connections to capture label relationships and a hierarchy-based probabilistic loss. We also compare TransHP (Wang et al., 2023b), a ViT-based model that learns prompt tokens to represent coarse classes and injects them into an intermediate block to enhance fine-grained predictions. Lastly, we compare Hier-ViT, a variant without visual segments and TK loss. Like our approach, Hier-ViT trains each hierarchy level using the class token from the last 6, 9, 12 blocks. To establish a *ceiling baseline*, we compare with flat models trained at a single hierarchy level. Flat-ViT classifies one level using the ViT class token, while Flat-CAST trains independent models for each level using the CAST architecture (Ke et al.,

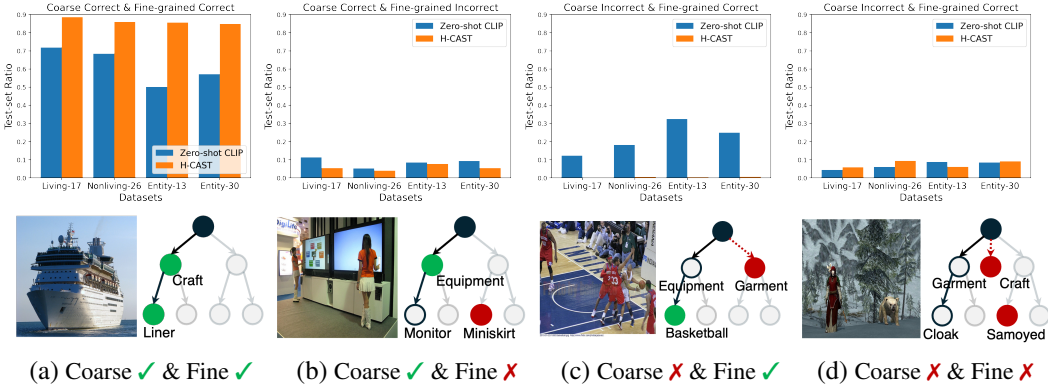


Figure 5: **Vision foundation models struggle with consistent predictions in hierarchical classification.** We evaluate CLIP (Radford et al., 2021) on the 2-level BREEDS dataset (top) and present misclassification examples from Entity-13 (bottom). (a) CLIP struggles to maintain consistency and correctness, achieving only about 50% accuracy on Entity-13. (b) CLIP more frequently predicts the coarse category correctly while misclassifying the fine-grained category compared to H-CAST across all datasets. (c) CLIP often predicts the fine-grained category correctly but fails at the coarse level, a mistake that is rare in H-CAST, suggesting difficulty in grasping broader conceptual understanding. In contrast, our H-CAST accurately predicts in all cases.

2024). We also compare with **Hierarchical Ensembles, HiE** (Jain et al., 2023), which improves fine-grained predictions via post-hoc correction using a coarse model. Note that flat models require separate models for each hierarchy level, leading to increased storage and training costs. For baseline methods, we use the official codebases and their reported optimal settings. All models are trained for 100 epochs, except TransHP, which is trained for 300 epochs as in the original paper. Details on the architecture and hyperparameter settings for H-CAST can be found in Appendix D.

#### 4.2 HIERARCHICAL CLASSIFICATION WITH VISION FOUNDATION MODELS

First, to demonstrate that longstanding hierarchical classification is not easily solved by today’s vision foundation models, we evaluate CLIP (Radford et al., 2021)’s performance on the 2-level BREEDS dataset. The top row of Fig. 5 shows prediction rates on the test set, while the bottom row presents examples from the Entity-13 dataset. Even considering the zero-shot prediction, Fig. 5 (a) shows that the overall ratio of correct predictions for both coarse and fine-grained classifications is significantly low, with only around 50% accuracy on the Entity-13 dataset. Fig. 5 (c) further highlights significant errors in coarse predictions when addressing broader concepts. Our findings support the recent study from Xu et al. (2024) that VLMs excel at fine-grained prediction but struggle with general concepts. This highlights the ongoing challenges of hierarchical classification, even with vision foundation models. Furthermore, when we examine the misclassification examples in bottom row of Fig. 5, we can see that CLIP focuses on different object areas for coarse and fine-grained predictions. For example, in (b), CLIP predicts “Equipment” in the coarse prediction but predicts “Miniskirt” in the fine-grained prediction instead of “Monitor” (a child of Equipment). However, our model, based on consistent visual segments, can make correct predictions in all cases.

#### 4.3 CONSISTENT HIERARCHICAL CLASSIFICATION ON BENCHMARKS

Table 1 shows the comparison with baselines on BREEDS dataset. Our H-CAST outperforms not only hierarchical classification baselines like FGN, HRN, TransHP, and Hier-ViT, but also flat baselines such as ViT, CAST, and HiE. Notably, H-CAST significantly surpasses ViT-baselines, Hier-ViT and TransHP, by over 11 percentage points, demonstrating that its success can be attributed to our consistent visual grounding and Tree-path Loss, rather than simply applying hierarchy supervision to a ViT backbone. While TransHP learns coarse labels as prompts, its goal is to guide fine-grained predictions rather than predict both levels simultaneously, likely leading to a lower consistency score. Also, H-CAST achieves a 4.3-6.4 percentage point gain on the FPA metric, compared to the HRN, despite using significantly fewer parameters.

It should be noted that flat models train a separate model for each hierarchy level, leading to substantially greater memory and training time requirements. The superior performance of our model


Table 1: **H-CAST achieves both high consistency and accuracy, outperforming both hierarchical and flat baselines on BREEDS.** It achieves a 4.3-6.4 percentage point gain in FPA metric over HRN with significantly fewer parameters. Additionally, H-CAST surpasses Hier-ViT and TransHP by over 11 percentage points, demonstrating that its success is due to our consistent visual grounding and Tree-path Loss, rather than adding hierarchy supervision to a ViT backbone. (Higher the metric is the best, except TICE.) ‘ViT-S’ refers to ViT-Small, while ‘RN-50’ denotes ResNet-50.

		Configuration		Living-17 (17-34)					Non-Living-26 (26-52)				
		backbone	#params	FPA	coarse	fine	wAP	TICE	FPA	coarse	fine	wAP	TICE
Flat	Flat-ViT	ViT-S	65.0M	66.24	75.71	72.06	73.28	17.11	57.46	67.50	65.73	57.46	23.27
	Flat-ViT + HiE	ViT-S	65.0M	67.59	75.71	71.35	72.81	9.88	59.73	67.50	65.31	66.04	13.69
	Flat-CAST	ViT-S	78.5M	78.82	88.06	82.88	84.61	8.82	76.17	84.77	81.08	82.31	11.77
	Flat-CAST + HiE	ViT-S	78.5M	81.59	88.06	83.24	84.85	5.18	79.23	84.77	81.39	82.51	6.19
Hierarchy	FGN	RN-50	24.8M	63.82	72.59	68.00	69.53	12.12	60.81	69.46	65.77	67.00	16.46
	HRN	RN-50	70.8M	<u>79.18</u>	<u>87.53</u>	<u>81.47</u>	<u>83.49</u>	<u>6.29</u>	<u>76.31</u>	<u>82.38</u>	<u>80.15</u>	<u>80.90</u>	<u>9.54</u>
	Hier-ViT	ViT-S	21.7M	74.06	80.94	74.88	76.90	10.50	72.04	73.31	68.39	70.03	12.45
	TransHP	ViT-S	21.7M	74.35	83.00	76.65	78.76	8.35	68.62	77.31	72.31	73.97	13.04
	Ours (H-CAST)	ViT-S	26.2M	<b>85.12</b>	<b>90.82</b>	<b>85.24</b>	<b>87.10</b>	<b>3.19</b>	<b>82.67</b>	<b>87.89</b>	<b>83.15</b>	<b>84.73</b>	<b>5.26</b>
	<i>Our Gains over SOTA</i>			<i>+5.94</i>	<i>+3.29</i>	<i>+3.77</i>	<i>+3.61</i>	<i>+3.10</i>	<i>+6.36</i>	<i>+5.51</i>	<i>+3.00</i>	<i>+3.83</i>	<i>+4.28</i>
		Configuration		Entity-13 (13-130)					Entity-30 (30-120)				
		backbone	#params	FPA	coarse	fine	wAP	TICE	FPA	coarse	fine	wAP	TICE
Flat	Flat-ViT	ViT-S	65.0M	64.22	76.28	76.06	76.08	21.33	66.93	76.28	74.35	74.77	18.75
	Flat-ViT + HiE	ViT-S	65.0M	65.20	76.47	74.91	75.05	15.68	68.77	76.47	73.92	74.43	11.08
	Flat-CAST	ViT-S	78.5M	78.63	87.80	83.72	84.09	10.65	82.67	87.89	83.15	84.73	5.26
	Flat-CAST + HiE	ViT-S	78.5M	79.52	87.80	83.40	83.80	6.83	83.70	87.89	84.30	85.02	4.20
Hierarchy	FGN	RN-50	24.8M	74.23	85.35	78.00	78.67	9.43	68.52	77.47	73.18	74.04	13.62
	HRN	RN-50	70.8M	<u>81.43</u>	<u>90.00</u>	<u>84.48</u>	<u>84.98</u>	<u>6.34</u>	<u>79.85</u>	<u>86.57</u>	<u>83.35</u>	<u>83.99</u>	<u>8.38</u>
	Hier-ViT	ViT-S	21.7M	74.63	86.95	75.39	77.70	5.19	73.01	81.38	74.10	74.76	11.61
	TransHP	ViT-S	21.7M	73.45	86.28	76.23	77.14	8.80	72.00	80.78	75.63	76.66	12.20
	Ours (H-CAST)	ViT-S	26.2M	<b>85.68</b>	<b>93.42</b>	<b>86.15</b>	<b>87.60</b>	<b>1.69</b>	<b>84.83</b>	<b>90.23</b>	<b>85.45</b>	<b>85.88</b>	<b>2.57</b>
	<i>Our Gains over SOTA</i>			<i>+4.25</i>	<i>+3.42</i>	<i>+1.67</i>	<i>+2.62</i>	<i>+4.65</i>	<i>+4.98</i>	<i>+3.66</i>	<i>+2.10</i>	<i>+1.89</i>	<i>+5.81</i>

compared to these flat models demonstrates its effectiveness in hierarchical classification. Similar results are also observed in the Aircraft and CUB datasets in Appendix E.5. Also, we include the evaluation on the larger-scale iNaturalist 2021-Mini dataset (Van Horn et al., 2021) in Appendix E.4.

#### 4.4 VISUALIZATIONS OF STRUCTURED VISUAL PARSING

**Well-structured visual parsing is crucial for accurate hierarchical classification.** H-CAST improves hierarchical classification by ensuring structured visual parsing, where fine details progressively merge into meaningful objects at coarser levels. Fig. 6 visualizes this process on the BREEDS Entity-30 dataset. In full-path correct predictions (Fig. 6, Left), fine-level details are effectively grouped into coherent objects. For example, in a correctly predicted *shoe* image, the shoe and ankle form a unified segment, maintaining object integrity.

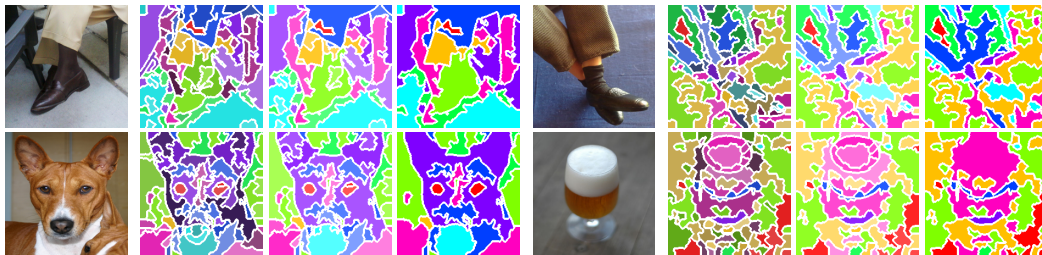

(a) Full-Path Correct Predictions

(b) Full-Path Incorrect Predictions

Figure 6: **Well-Structured visual parsing enables accurate hierarchical classification, while fragmented segmentation correlates with misclassification.** We compare fine-to-coarse segmentation for fully correct (a) and incorrect (b) predictions on the Entity-30 dataset to show how visual parsing quality affects classification. For correct predictions (a), fine details merge into coherent objects at coarser levels, preserving structure. For example, in the correctly predicted *shoe* image, the *shoe* and *ankle* form a *unified segment*, maintaining object integrity. In contrast, for incorrect predictions (b), segmentation is fragmented and inconsistent. The misclassified *shoe* image shows *scattered segments* blending with the background, making it difficult to recognize the overall shape. Likewise, the *beer glass* lose key features due to unstable grouping. These results highlight that accurate hierarchical classification relies on structured visual parsing.



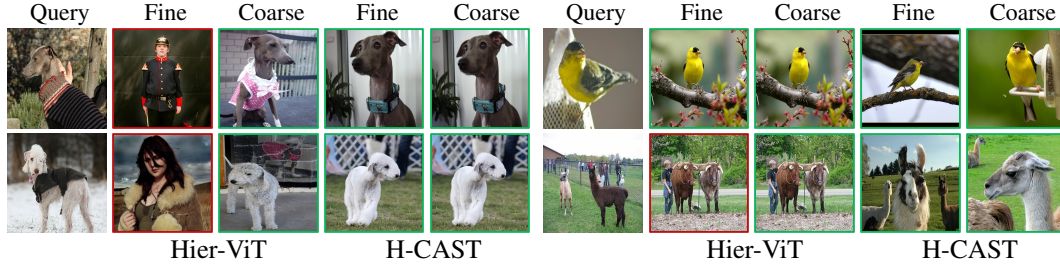


Figure 7: **Consistent Visual Grounding Enhances Feature Learning in Hierarchical Classification.** We compare nearest neighbors of class token features at fine and coarse levels for queries correctly classified at both levels (Entity-30). In the top-left, Hier-ViT retrieves a person in a black uniform at the fine level, likely due to clothing color. This raises doubts about whether the model truly learned the dog’s features. In the second example (top right), the query bird has gray wings with a yellow body. H-CAST retrieves a gray-winged bird at the fine level and a yellow-bodied bird at the coarse level, capturing fine-level detail and coarse-level semantics. Hier-ViT lacks this distinction. In the final example (bottom right), the query shows two llamas in a green field. Hier-ViT retrieves two oxen in a similar setting, resulting in fine-level misclassification. H-CAST retrieves true llama images: one showing both white and brown llamas at the fine level, and a typical llama at the coarse level. This shows that H-CAST attends to class-relevant features while maintaining hierarchical consistency. (Green borders indicate same-class retrievals; red borders indicate mismatches.)

and ankle merge into a single segment, maintaining object integrity. Similarly, in the dog example, fine details in the earlier segments merge into a unified face, eyes, and nose at the coarse level, demonstrating structured feature grouping. Conversely, in full-path incorrect predictions (Fig. 6, Right), segmentation is fragmented and inconsistent. The misclassified shoe image shows scattered segments blending with the background, while even a simple-shaped object like a beer glass is broken into disconnected parts, losing its structural coherence. This highlights that structured visual parsing is key to accurate classification, while fragmented segmentation leads to errors.

#### 4.5 EFFECT OF VISUAL GROUNDING ON HIERARCHICAL CLASSIFICATION

**H-CAST Ensures Consistent and Class-Relevant Feature Learning.** We compare nearest neighbors of class token features at fine and coarse levels for queries correctly classified at both levels on Entity-30 (Fig. 7). If a model truly learns discriminative class features, its nearest neighbors should remain consistent across levels. However, Hier-ViT often retrieves visually similar but semantically incorrect images, while H-CAST consistently selects class-relevant neighbors at both levels. For example, Hier-ViT retrieves a person in a black uniform as the closest fine-level neighbor for an *Italian Greyhound*, likely due to clothing color similarity (top left). Similarly, for a curly-haired *Bedlington Terrier*, it selects a fur coat (bottom left), suggesting it relies on superficial textures rather than class-specific features. In contrast, H-CAST consistently retrieves the correct class, selecting a visually similar *Italian Greyhound* and *Bedlington Terrier* at both levels, ensuring more stable and meaningful feature learning. These results show that Hier-ViT lacks visual consistency across levels, while H-CAST maintains class-relevant and hierarchically aligned retrievals.

#### 4.6 ABLATION ANALYSIS OF ARCHITECTURE DESIGN AND LOSS FUNCTION IN H-CAST

**Fine-to-Coarse vs. Coarse-to-Fine learning.** Our model adopts a Fine-to-Coarse (F→C) learning strategy, first learning fine labels in the lower block and progressively integrating coarser labels. This contrasts with prior methods, which typically learn coarse features first (Zhu & Bain, 2017; Yan et al., 2015; Wang et al., 2023b). To evaluate its effectiveness, we compare F→C with two baselines: Coarse-to-Fine (C→F), which follows a conventional hierarchy by learning coarse labels

Table 2: Ablation studies of learning design and loss functions on Aircraft data.

Direction	C→F	C+F	F→C	Loss abl.	$L_{TK}$	$L_{HS}$	Both	Consis.	Flat.	BCE	KL Div.
FPA	82.01	81.76	<b>82.66</b>	FPA	82.48	82.66	<b>83.72</b>	FPA	82.87	82.18	<b>83.72</b>
maker	93.16	<u>93.52</u>	<b>94.27</b>	maker	94.30	94.27	<b>94.96</b>	maker	94.63	94.21	<b>94.96</b>
family	89.92	<b>90.31</b>	<u>90.19</u>	family	90.37	90.19	<b>91.39</b>	family	90.94	90.13	<b>91.39</b>
model	84.10	<b>84.58</b>	<u>84.40</u>	model	84.04	84.40	<b>85.33</b>	model	84.97	84.88	<b>85.33</b>
wAP	87.50	<b>87.93</b>	<u>87.91</u>	wAP	87.80	87.91	<b>88.90</b>	wAP	88.51	88.11	<b>88.90</b>

(a) ‘Coarse→Fine’ design achieves best performance.

(b) Utilizing both losses yields best performance.

(c) KL Divergence loss outperforms alternative losses.

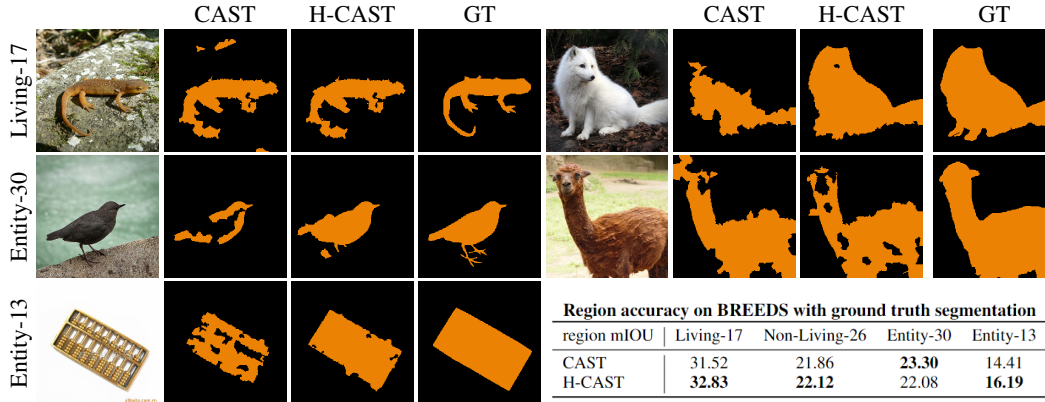


Figure 8: **H-CAST improves segmentation by leveraging hierarchical taxonomy.** We visualize segmentation results on BREEDS dataset and measure the region mIOU of fine-level objects for samples with segmentation ground truth (GT) from ImageNet-S (Gao et al., 2022). In the visualized images, we can observe that H-CAST better captures the overall shape in a more coherent manner compared to CAST. In quantitative evaluation, H-CAST outperforms CAST in most datasets despite using coarse-level supervision for the last-level segments whereas CAST employs fine-level supervision. It is surprising to find that the taxonomy hierarchy can help part-to-whole segmentation.

first, and Fine-Coarse Merging (C+F), which combines fine and coarse features across blocks. For fairness, we exclude Tree-path KL Divergence loss in these comparisons. Table 2a (FGVC-Aircraft) shows that C→F yields the lowest fine-grained accuracy, while C+F slightly improves accuracy but adds significant parameter overhead. In contrast, F→C balances simplicity and strong performance, making it an effective choice for hierarchical classification. Additionally, attention visualizations (Appendix E.2) reveal that lower blocks focus on fine details, while upper blocks capture broader structures, demonstrating that our design effectively guides attention across hierarchy levels.

**Ablation Studies on the Proposed Losses.** We conduct two ablation studies to evaluate our loss functions. First, we assess the individual contributions of Hierarchical Spatial-consistency loss  $L_{HS}$  and Tree-path KL Divergence loss  $L_{TK}$  on Aircraft. Table 2b shows that both losses significantly enhance performance, with their combination achieving the best accuracy and consistency. Next, we examine the effect of different loss functions by replacing KL Divergence loss with Binary Cross Entropy (BCE) and Flat Consistency loss. BCE directly substitutes the KL divergence component, while Flat Consistency loss, inspired by a bottom-up approach, infers coarse labels from fine predictions using BCE. As shown in Table 2c, KL Divergence loss achieves the highest FPA, demonstrating superior accuracy and consistency. Additional results on Living-17 are in Appendix E.3.

#### 4.7 ADDITIONAL BENEFITS OF HIERARCHICAL CLASSIFICATION FOR SEGMENTATION

**Hierarchical semantic recognition enhances segmentation.** Although our primary focus is hierarchical recognition, we investigate whether incorporating hierarchical label information can also improve segmentation. Fig. 8 provide a qualitative and quantitative comparison between H-CAST and CAST. H-CAST, which uses varying granularity supervision for segments, outperforms CAST, which employs fine-grained level supervision, on most datasets such as Living-17, Non-Living-26, and Entity-13. The visualized results show that H-CAST better captures the overall shape in a more coherent manner compared to CAST. These findings demonstrate that utilizing hierarchical taxonomy benefits not only recognition but also segmentation. Details of the evaluation method and more visualization comparison with CAST are included in the Appendix E.7 and Fig. 11.

## 5 SUMMARY AND DISCUSSION

We tackle inconsistent predictions in hierarchical classification by introducing consistent visual grounding, leveraging varying granularity segments to align coarse and fine-grained classifiers. Unlike existing methods that solely rely on external semantic constraints, our approach leverages varying granularity segments to guide hierarchical classifiers, ensuring they focus on coherent and relevant regions across all levels. This leads to significant improvements across benchmarks, setting a new standard for robust hierarchical classification. While our method shows strong performance, reducing the computational overhead from superpixel generation can further improve efficiency.

## ACKNOWLEDGEMENTS

This project was supported, in part, by NSF 2215542, NSF 2313151, a Berkeley AI Research grant with Google, and Bosch gift funds to S. Yu at UC Berkeley and the University of Michigan.

## REFERENCES

- Luca Bertinetto, Romain Mueller, Konstantinos Tertikas, Sina Samangooei, and Nicholas A Lord. Making better mistakes: Leveraging class hierarchies with deep networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2020.
- Clemens-Alexander Brust and Joachim Denzler. Integrating domain knowledge: using hierarchies to improve deep classifiers. In *Asian conference on pattern recognition*. Springer, 2019.
- Dongliang Chang, Kaiyue Pang, Yixiao Zheng, Zhanyu Ma, Yi-Zhe Song, and Jun Guo. Your” flamingo” is my” bird”: fine-grained, or not. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021.
- Jingzhou Chen, Peng Wang, Jian Liu, and Yuntao Qian. Label relation graphs enhanced hierarchical residual network for hierarchical multi-granularity classification. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022.
- Ekin D Cubuk, Barret Zoph, Jonathon Shlens, and Quoc V Le. Randaugment: Practical automated data augmentation with a reduced search space. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition workshops*, 2020.
- Jia Deng, Alexander C Berg, Kai Li, and Li Fei-Fei. What does classifying more than 10,000 image categories tell us? In *Computer Vision—ECCV 2010: 11th European Conference on Computer Vision, Heraklion, Crete, Greece, September 5-11, 2010, Proceedings, Part V 11*. Springer, 2010.
- Jia Deng, Nan Ding, Yangqing Jia, Andrea Frome, Kevin Murphy, Samy Bengio, Yuan Li, Hartmut Neven, and Hartwig Adam. Large-scale object classification using label relation graphs. In *Computer Vision—ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6-12, 2014, Proceedings, Part I 13*, 2014.
- Shanghua Gao, Zhong-Yu Li, Ming-Hsuan Yang, Ming-Ming Cheng, Junwei Han, and Philip Torr. Large-scale unsupervised semantic segmentation. *TPAMI*, 2022.
- Ashima Garg, Depanshu Sani, and Saket Anand. Learning hierarchy aware features for reducing mistake severity. In *European Conference on Computer Vision*, 2022.
- Vivien Sainte Fare Garnot and Loic Landrieu. Leveraging class hierarchies with metric-guided prototype learning. *arXiv preprint arXiv:2007.03047*, 2020.
- Ju He, Jieneng Chen, Ming-Xian Lin, Qihang Yu, and Alan L Yuille. Compositor: Bottom-up clustering and compositing for robust part and object segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023.
- Grant Van Horn, Oisin Mac Aodha, Yang Song, Yin Cui, Chen Sun, Alexander Shepard, Hartwig Adam, Pietro Perona, and Serge J. Belongie. The inaturalist species classification and detection dataset. In *2018 IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2018, Salt Lake City, UT, USA, June 18-22, 2018*, 2018.
- Jyh-Jing Hwang, Stella X Yu, Jianbo Shi, Maxwell D Collins, Tien-Ju Yang, Xiao Zhang, and Liang-Chieh Chen. Segsort: Segmentation by discriminative sorting of segments. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2019.
- Kanishk Jain, Shyamgopal Karthik, and Vineet Gandhi. Test-time amendment with a coarse classifier for fine-grained classification. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- Juan Jiang, Jingmin Yang, Wenjie Zhang, and Hongbin Zhang. Hierarchical multi-granularity classification based on bidirectional knowledge transfer. *Multimedia Systems*, 2024.

- Shyamgopal Karthik, Ameya Prabhu, Puneet K. Dokania, and Vineet Gandhi. No cost likelihood manipulation at test time for making better mistakes in deep networks. In *International Conference on Learning Representations*, 2021.
- Tsung-Wei Ke, Jyh-Jing Hwang, Yunhui Guo, Xudong Wang, and Stella X Yu. Unsupervised hierarchical semantic segmentation with multiview cosegmentation and clustering transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022.
- Tsung-Wei Ke, Sangwoo Mo, and Stella X. Yu. Learning hierarchical image segmentation for recognition and by recognition. In *The Twelfth International Conference on Learning Representations*, 2024.
- Liulei Li, Tianfei Zhou, Wenguan Wang, Jianwu Li, and Yi Yang. Deep hierarchical semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022.
- Liulei Li, Wenguan Wang, and Yi Yang. Logicseg: Parsing visual semantics with neural logic learning and reasoning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023.
- Feng Liang, Bichen Wu, Xiaoliang Dai, Kunpeng Li, Yanan Zhao, Hang Zhang, Peizhao Zhang, Peter Vajda, and Diana Marculescu. Open-vocabulary semantic segmentation with mask-adapted clip. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023.
- Yang Liu, Lei Zhou, Pengcheng Zhang, Xiao Bai, Lin Gu, Xiaohan Yu, Jun Zhou, and Edwin R Hancock. Where to focus: Investigating hierarchical attention relationship for fine-grained visual classification. In *European Conference on Computer Vision*. Springer, 2022.
- S. Maji, J. Kannala, E. Rahtu, M. Blaschko, and A. Vedaldi. Fine-grained visual classification of aircraft. Technical report, 2013.
- George A Miller. Wordnet: a lexical database for english. *Communications of the ACM*, 1995.
- Yassine Ouali, Céline Hudelot, and Myriam Tami. Autoregressive unsupervised image segmentation. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part VII* 16. Springer, 2020.
- Lu Qi, Jason Kuen, Weidong Guo, Jiuxiang Gu, Zhe Lin, Bo Du, Yu Xu, and Ming-Hsuan Yang. Aims: All-inclusive multi-level segmentation for anything. *Advances in Neural Information Processing Systems*, 2024.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*. PMLR, 2021.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision (IJCV)*, 2015.
- Shibani Santurkar, Dimitris Tsipras, and Aleksander Madry. {BREEDS}: Benchmarks for subpopulation shift. In *International Conference on Learning Representations*, 2021.
- Ramprasaath R Selvaraju, Michael Cogswell, Abhishek Das, Ramakrishna Vedantam, Devi Parikh, and Dhruv Batra. Grad-cam: Visual explanations from deep networks via gradient-based localization. In *Proceedings of the IEEE international conference on computer vision*, 2017.
- Carlos N Silla and Alex A Freitas. A survey of hierarchical classification across different application domains. *Data mining and knowledge discovery*, 2011.
- Rishabh Singh, Pranav Gupta, Pradeep Shenoy, and Ravikiran Sarvadevabhatla. Float: Factorized learning of object attributes for improved multi-object multi-part scene parsing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 1445–1455, 2022.



- Samuel Stevens, Jiaman Wu, Matthew J Thompson, Elizabeth G Campolongo, Chan Hee Song, David Edward Carlyn, Li Dong, Wasila M Dahdul, Charles Stewart, Tanya Berger-Wolf, Wei-Lun Chao, and Yu Su. Bioclip: A vision foundation model for the tree of life. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024.
- Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. Rethinking the inception architecture for computer vision. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016.
- Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Herve Jegou. Training data-efficient image transformers & distillation through attention. In *Proceedings of the 38th International Conference on Machine Learning*, 2021.
- Jack Valmadre. Hierarchical classification at multiple operating points. *Advances in Neural Information Processing Systems*, 2022.
- Michael Van den Bergh, Xavier Boix, Gemma Roig, Benjamin De Capitani, and Luc Van Gool. Seeds: Superpixels extracted via energy-driven sampling. In *Computer Vision—ECCV 2012: 12th European Conference on Computer Vision, Florence, Italy, October 7–13, 2012, Proceedings, Part VII 12*, 2012.
- Grant Van Horn, Elijah Cole, Sara Beery, Kimberly Wilber, Serge Belongie, and Oisín Mac Aodha. Benchmarking representation learning for natural world image collections. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2021.
- Rui Wang, Cong Zou, Weizhong Zhang, Zixuan Zhu, and Lihua Jing. Consistency-aware feature learning for hierarchical fine-grained visual classification. In *Proceedings of the 31st ACM International Conference on Multimedia*, 2023a.
- Wenhao Wang, Yifan Sun, Wei Li, and Yi Yang. TransHP: Image classification with hierarchical prompting. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023b.
- Xudong Wang, Shufan Li, Konstantinos Kallidromitis, Yusuke Kato, Kazuki Kozuka, and Trevor Darrell. Hierarchical open-vocabulary universal image segmentation. *Advances in Neural Information Processing Systems*, 2024.
- Jonatas Wehrmann, Ricardo Cerri, and Rodrigo Barros. Hierarchical multi-label classification networks. In *International conference on machine learning*. PMLR, 2018.
- P. Welinder, S. Branson, T. Mita, C. Wah, F. Schroff, S. Belongie, and P. Perona. Caltech-UCSD Birds 200. Technical Report CNS-TR-2010-001, California Institute of Technology, 2010.
- Tz-Ying Wu, Pedro Morgado, Pei Wang, Chih-Hui Ho, and Nuno Vasconcelos. Solving long-tailed recognition with deep realistic taxonomic classifier. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part VIII 16*, 2020.
- Zhenlin Xu, Yi Zhu, Siqi Deng, Abhay Mittal, Yanbei Chen, Manchen Wang, Paolo Favaro, Joseph Tighe, and Davide Modolo. Benchmarking zero-shot recognition with vision-language models: Challenges on granularity and specificity. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- Zhicheng Yan, Hao Zhang, Robinson Piramuthu, Vignesh Jagadeesh, Dennis DeCoste, Wei Di, and Yizhou Yu. Hd-cnn: hierarchical deep convolutional neural networks for large scale visual recognition. In *Proceedings of the IEEE international conference on computer vision*, 2015.
- Sangdoo Yun, Dongyoon Han, Seong Joon Oh, Sanghyuk Chun, Junsuk Choe, and Youngjoon Yoo. Cutmix: Regularization strategy to train strong classifiers with localizable features. In *Proceedings of the IEEE/CVF international conference on computer vision*, 2019.
- Siqi Zeng, Remi Tachet des Combes, and Han Zhao. Learning structured representations by embedding class hierarchy. In *The Eleventh International Conference on Learning Representations*, 2022.

- Hongyi Zhang, Moustapha Cisse, Yann N Dauphin, and David Lopez-Paz. mixup: Beyond empirical risk minimization. *arXiv preprint arXiv:1710.09412*, 2017.
- Shichuan Zhang, Sunyi Zheng, Zhongyi Shui, and Lin Yang. Hls-fgvc: Hierarchical label semantics enhanced fine-grained visual classification. In *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2024.
- Shu Zhang, Ran Xu, Caiming Xiong, and Chetan Ramaiah. Use all the labels: A hierarchical multi-label contrastive learning framework. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022.
- Xinqi Zhu and Michael Bain. B-cnn: branch convolutional neural network for hierarchical classification. *arXiv preprint arXiv:1709.09890*, 2017.

## Appendix

### A QUANTITATIVE EVIDENCE FOR CONSISTENT VISUAL GROUNDING

To quantitatively validate our observation that inconsistent predictions often occur when coarse and fine-grained classifiers focus on different regions in Figure 3, we analyze the Grad-CAM (Selvaraju et al., 2017) heatmaps of these classifiers. Specifically, we compute two metrics: the overlap score and the correlation score.

The **overlap score** quantifies the degree to which the regions activated by the two classifiers coincide. For each heatmap, we define a significant region as the set of pixels where activation values exceed a threshold. Specifically, the overlap count ( $O$ ) measures the number of overlapping pixels between heatmaps  $A$  and  $B$ , where both values exceed a threshold ( $\tau = 0.001$ ). It is defined as:

$$O = \sum_{i,j} [M_A(i,j) \wedge M_B(i,j)], \quad (4)$$

where  $M_A(i,j)$  and  $M_B(i,j)$  are binary masks indicating significant regions in  $A$  and  $B$ , respectively. These masks are defined as:

$$M_A(i,j) = \begin{cases} 1 & \text{if } A(i,j) > \tau, \\ 0 & \text{otherwise,} \end{cases} \quad M_B(i,j) = \begin{cases} 1 & \text{if } B(i,j) > \tau, \\ 0 & \text{otherwise.} \end{cases} \quad (5)$$

The **correlation score** measures the linear relationship between the activation values of the overlapping regions in the two heatmaps. Let  $A_k$  and  $B_k$  the values in the overlapping regions, then correlation score is computed as:

$$R = \frac{\sum_{k=1}^n (A_k - \mu_A)(B_k - \mu_B)}{\sqrt{\sum_{k=1}^n (A_k - \mu_A)^2 \cdot \sum_{k=1}^n (B_k - \mu_B)^2}}, \quad (6)$$

where  $n$  is the number of overlapping pixels,  $\mu_A$  is the mean of  $\{A_k\}$ , and  $\mu_B$  is the mean of  $\{B_k\}$ .

Higher overlap and correlation scores indicate stronger agreement between the regions attended to by the two classifiers. Conversely, lower scores highlight a lack of alignment in their focus.

Interestingly, empirical results from the FGN model (Chang et al., 2021) on the Entity-30 dataset show that when both classifiers make correct predictions, the overlap and correlation scores are significantly higher. In contrast, incorrect predictions correspond to notably lower scores, as shown in Table 3. These findings support our hypothesis that aligning the focus of coarse- and fine-grained classifiers enhances both prediction accuracy and consistency.

Table 3: **Overlap and correlation scores between coarse and fine-grained Grad-CAM heatmaps.** This shows that correct predictions correspond to higher overlap and correlation between coarse and fine-grained classifiers, highlighting the importance of aligning classifier focus for accuracy and consistency.

Overlap	Fine-grained	
	True	False
Coarse	True   <b>0.51 ± 0.20</b>	0.25 ± 0.13
	False   0.36 ± 0.18	0.37 ± 0.19

(a) Overlap Scores

Correlation	Fine-grained	
	True	False
Coarse	True   <b>0.70 ± 0.26</b>	-0.02 ± 0.40
	False   0.30 ± 0.42	0.35 ± 0.41

(b) Correlation Scores

## B ADDITIONAL RELATED WORK

**Hierarchical classification** can be divided into **single-level prediction** and **full-taxonomy prediction** based on the output structure. Single-level prediction is further categorized into **fine-grained classification** and **local classifier** approaches.

### 1) Single-level prediction:

**1-1) The fine-grained classification (bottom-up) approach** focuses on predicting fine-grained classes (e.g., leaf nodes) by leveraging taxonomy (Deng et al., 2014; Zhang et al., 2022; Zeng et al., 2022). It is often referred to as a bottom-up method because higher-level coarse classes can be inferred from the predicted fine-grained classes. Various methods have been proposed to effectively use hierarchical information. For example, hierarchical cross-entropy (HXE) loss (Bertinetto et al., 2020) reweights cross-entropy terms along the hierarchy tree based on class depth. Inspired by transformer prompting techniques, TransHP (Wang et al., 2023b) introduced coarse-class prompt tokens to improve fine-grained classification accuracy. Recently, BIOCLIP (Stevens et al., 2024), trained on large-scale Tree of Life data, achieved superior few-shot and zero-shot performance using a CLIP (Radford et al., 2021) contrastive objective on text combining fine-grained and higher-level classes. One of the actively studied topics is minimizing “mistake severity” (e.g., the tree distance between incorrect predictions and the ground truth) (Bertinetto et al., 2020; Karthik et al., 2021; Garg et al., 2022).

However, while effective on clear and detailed images, this approach struggles in real-world scenarios where fine-grained predictions are challenging (e.g., birds flying at high altitude), leading to incorrect predictions at higher levels. To address this, we propose a model that predicts across the entire taxonomy, which we believe provides greater robustness in practical applications.

**1-2) The local classifier (top-down) approach** leverages local information, such as higher-level class predictions, to make predictions at the next level. This design allows predictions at arbitrary nodes by stopping the inference process when a certain decision threshold is met, leading to more reliable predictions at higher levels (Deng et al., 2010; Wu et al., 2020; Brust & Denzler, 2019). As a result, these methods emphasize metrics such as the correctness-specificity trade-off (Valmadre, 2022). While a single model is commonly used, HiE (Jain et al., 2023) adjusts fine-level predictions post-hoc using coarse predictions from independently trained classifiers. However, a disadvantage of this top-down approach is the propagation of errors from higher-level predictions to lower levels.

**2) The full-taxonomy prediction (global classifier) approach** aims to predict the entire taxonomy *at once*, unlike prior approaches. Most popular and effective methods use a shared backbone with separate branches for each level (Zhu & Bain, 2017; Wehrmann et al., 2018; Chang et al., 2021; Liu et al., 2022; Chen et al., 2022; Jiang et al., 2024; Zhang et al., 2024). The key difference lies in how the hierarchical relationships are modeled. For instance, in FGN (Chang et al., 2021), finer features are concatenated to predict coarse labels, whereas in HRN (Chen et al., 2022), coarse features are added to finer features through residual connections. A critical issue in this approach is maintaining *consistency* with the taxonomy in the predicted labels. To address this, Wang et al. (2023a) proposed a consistency-aware method by adjusting prediction scores through coarse-to-fine deduction and fine-to-coarse induction. However, we observed that using separate branches can lead to inconsistency, as each branch processes the image independently. To address this, we propose a model based on consistent visual grounding. To the best of our knowledge, no prior work has utilized visual segments to resolve inconsistency in hierarchical classification.

**Hierarchical Semantic Segmentation** aims to group and classify each pixel according to a class hierarchy (Li et al., 2022; Singh et al., 2022; Li et al., 2023; He et al., 2023; Wang et al., 2024; Qi et al., 2024), with pixel grouping varying based on the taxonomy used. However, these works require *pixel-level annotations*, which are not available in hierarchical classification. In addition, while these methods focus on precise pixel-level grouping, our work leverages unsupervised segments of varying granularities within the image for hierarchical classification.

**Unsupervised/Weakly-supervised Semantic Segmentation** aims to group pixels without pixel-level annotations or using only class labels (Hwang et al., 2019; Ouali et al., 2020; Ke et al., 2022; 2024). These works employ hierarchical grouping to achieve meaningful segmentation *without* pixel-level labels. Here, “hierarchical” refers to part-to-whole visual grouping, where smaller units (e.g., a person’s face or arm) are grouped into larger regions (e.g., the whole body). Based on our intuition



that fine-grained classifiers need more detailed information, while coarse classifiers focus on broader groupings, our approach leverages these varying types of visual grouping. To implement this, we adopt the recently proposed CAST (Ke et al., 2024), whose graph pooling naturally supports consistent visual grouping. Notably, our work introduces the novel insight that part-to-whole segmentation can align with taxonomy hierarchies (e.g., finer segments for fine-grained labels, coarser segments for coarse labels), a connection not previously explored.

## C BENCHMARK DATASET

Table 4: **Benchmark Datasets.**

Datasets	L-17	NL-26	E-13	E-30	CUB	Aircraft	iNat21-Mini
# Levels	2	2	2	2	3	3	3
# of classes	17-34	26-52	13-130	30-120	13-38-200	30-70-100	273-1,103-10,000
# Train images	44.2K	65.7K	167K	154K	5,994	6,667	500K
# Test images	1.7K	2.6K	6.5K	6K	5,794	3,333	100K

## D HYPERPARAMETERS FOR TRAINING.

For a fair comparison, we use ViT-Small and CAST-Small models of corresponding sizes. As in CAST, we train both ViT and CAST using DeiT framework (Touvron et al., 2021), and segmentation granularity is set to 64, 32, 16, 8 after 3, 3, 3, 2 encoder blocks, respectively. Our training progresses from fine to coarse levels, with each segment corresponding accordingly. The initial number of superpixels is set to 196, and all data is trained with a batch size of 256. Following the literature (Chen et al., 2022), we use ImageNet pre-trained models for the Aircraft, CUB, and iNat datasets. For the ImageNet subset BREEDS dataset, we train the models from scratch. We show hyper-parameter settings in Table 5.

Table 5: **Hyper-parameters for training H-CAST and ViT on FGVC-Aircraft, CUB-200-2011, BREEDS, and iNaturalist datasets.** We follow mostly the same set up as CAST (Ke et al., 2024).

Parameter	Aircraft	CUB, BREEDS, iNaturalist
batch_size	256	256
crop_size	224	224
learning_rate	$1e^{-3}$	$5e^{-4}$
weight_decay	0.05	0.05
momentum	0.9	0.9
total_epochs	100	100
warmup_epochs	5	5
warmup_learning_rate	$1e^{-4}$	$1e^{-6}$
optimizer	Adam	Adam
learning_rate_policy	Cosine decay	Cosine decay
augmentation (Cubuk et al., 2020)	RandAug(9, 0.5)	RandAug(9, 0.5)
label_smoothing (Szegedy et al., 2016)	0.1	0.1
mixup (Zhang et al., 2017)	0.8	0.8
cutmix (Yun et al., 2019)	1.0	1.0
$\alpha$ (weight for TK loss)	0.5	0.5
ViT-S: # Tokens	$[196]_{\times 11}$	
CAST-S: # Tokens	$[196]_{\times 3}, [64]_{\times 3}, [32]_{\times 3}, [16]_{\times 2}$	

## E ADDITIONAL EXPERIMENTS

### E.1 COMPARISON BETWEEN FPA AND TICE.

FPA evaluates both accuracy and consistency, while TICE focuses solely on consistency. Achieving high FPA is the primary goal in hierarchical classification. The distinction between FPA and TICE is shown in Table 6.

Table 6: **FPA considers both correctness and consistency.** While TICE (Wang et al., 2023a) measures only consistency, FPA marks predictions as positive only when they are both correct and consistent.

GT								
TICE	✓	✓	✗	✗	✗	✗	✓	✓
FPA	✓	✗	✗	✗	✗	✗	✗	✗

### E.2 VISUALIZATION OF ATTENTION MAP

To validate our claim that the model guides classifiers toward consistent visual grounding, we visualize attention maps from H-CAST in Figure 9. The visualizations demonstrate that as we progress from lower to upper blocks, the model increasingly attends to similar regions. In the lower blocks, attention is more detailed and localized, while in the upper blocks, attention expands to cover broader regions, including those highlighted by the lower blocks. These patterns align with our intended design for visual grounding in hierarchical classification.

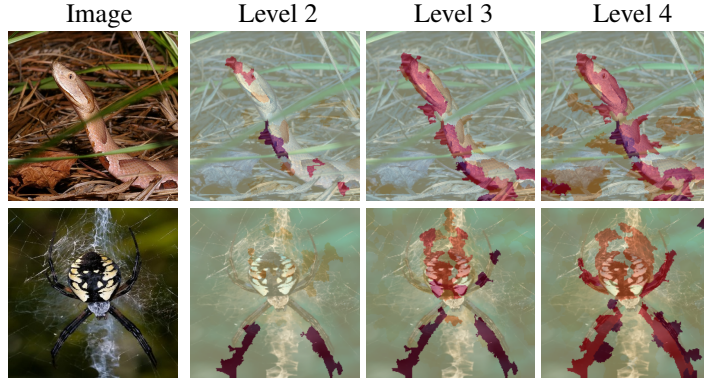


Figure 9: **Visualizations of Attention maps from H-CAST.** We align the attention weights with superpixels and average them across all heads. Darker red areas represent regions with higher attention weights. At the lower level (level 2), the attention is more focused on specific regions, such as the snake’s head and parts of its body, emphasizing these as critical features for fine-grained classification (e.g., “*Hypsiglena torquata*”). In contrast, at the upper level (level 4), the attention expands to encompass the entire body of the snake, suggesting a shift towards a more holistic understanding of the object for coarse label (e.g., “snake”). This progression from localized to broader attention illustrates how H-CAST hierarchically integrates information across layers, supporting consistent visual grounding for hierarchical classification.

### E.3 ADDITIONAL EXPERIMENTS FOR LOSS ABLATION

Similar to the results on the Aircraft dataset, the Living-17 dataset also shows consistent performance trends, with our proposed loss achieving strong results (Table 7, Table 8). Interestingly, for TICE, which measures only semantic consistency, the TK loss alone (Table 7) and the BCE or Flat Consistency loss achieved better performance (Table 8). However, when considering both accuracy and consistency (i.e., FPA), our proposed loss delivered the best overall performance.

Table 7: Utilizing both losses yields best performance on Living-17.

$L_{HS}$	$L_{TK}$	FPA	Coarse	Fine	wAP	TICE
$\times$	$\checkmark$	84.00	90.71	84.30	86.43	<b>1.71</b>
$\checkmark$	$\times$	84.21	90.24	84.59	86.78	2.59
$\checkmark$	$\checkmark$	<b>85.12</b>	<b>90.82</b>	<b>85.24</b>	<b>87.10</b>	3.19

Table 8: KL Div. loss shows best performance on Living-17.

Sem. Consis.	FPA	Coarse	Fine	wAP	TICE
Flat Cons.	82.82	88.88	83.53	85.31	2.51
BCE	83.65	89.76	84.00	85.92	<b>1.76</b>
KL Div.	<b>85.12</b>	<b>90.82</b>	<b>85.24</b>	<b>87.10</b>	3.19

### E.4 EVALUATION ON THE LARGE-SCALE iNATURALIST DATASETS.

We present the results of our experiments on the large-scale dataset, iNaturalist21-mini (Van Horn et al., 2021) and iNaturalist-2018 (Horn et al., 2018). First, iNaturalist21-mini contains 10,000 classes, 500,000 training samples, and 100,000 test samples, organized within an 8-level hierarchy. For our experiments, we focused on a 3-level hierarchy consisting of *name*, *family*, and *order*. This selection was motivated by the need for models with practical and meaningful granularity for real-world applications.

The number of classes at each hierarchical level is as follows: Kingdom (3), Supercategory (11), Phylum (13), Class (51), Order (273), Family (1,103), Genus (4,884), Name (10,000)

We excluded coarse-grained levels such as *kingdom* (3 classes), *Supercategory* (11 classes), because their minimal granularity adds little value for classification tasks. Similarly, overly fine-grained levels such as *genus* (4,884 classes), where many species are represented by only one or two samples, offer limited differentiation from direct *name*-level classification. Instead, we focused on *order* (273 classes), *family* (1,103 classes), and *name* (10,000 classes) to ensure that each higher-level class represents a meaningful subset of lower-level classes, allowing for interpretable and consistent predictions.

The results are shown in Table 9. Compared to ViT baselines that use the same ViT-small backbone, our method achieves a 5.98% improvement over TransHP (Wang et al., 2023b) and a 9.27% improvement over Hier-ViT in the FPA metric, demonstrating a significant performance advantage.

Table 9: Our H-CAST outperforms ViT-backbone baselines, Hier-ViT and TransHP, on the large-scale iNaturalist2021-Mini dataset, achieving significantly higher accuracy and consistency.

	iNaturalist2021-Mini (273 - 1,103 - 10,000)					
	FPA( $\uparrow$ )	order( $\uparrow$ )	family( $\uparrow$ )	name( $\uparrow$ )	wAP( $\uparrow$ )	TICE( $\downarrow$ )
Hier-ViT	55.65	<u>87.25</u>	77.81	62.71	64.76	26.21
TransHP	<u>58.94</u>	83.49	<u>82.15</u>	68.82	70.46	24.63
Ours (H-CAST)	<b>64.92</b>	<b>89.72</b>	<b>84.00</b>	<b>70.00</b>	<b>71.83</b>	<b>16.00</b>
<i>Our Gains</i>	<b>+5.98</b>	<b>+2.47</b>	<b>+1.18</b>	<b>+1.27</b>	<b>+1.37</b>	<b>+8.63</b>

We further compare our method with single-level approaches that utilize hierarchical labels to enhance fine-grained accuracy (*e.g.*, Guided (Garnot & Landrieu, 2020), HiMulConE (Zhang et al., 2022), and TransHP (Wang et al., 2023b)). The comparison is conducted on the large-scale iNaturalist-2018 dataset, following TransHP. iNaturalist-2018 includes two-level hierarchical annotations with 14 super-categories and 8,142 species, comprising 437,513 training images and 24,426 validation images. We use the same H-CAST-small and the model is trained for 100 epochs, using the same hyper-parameters in Table 5. As shown in Table 10, our method achieves strong fine-grained accuracy, demonstrating the effectiveness of consistent visual grounding.

Table 10: **H-CAST outperforms methods leveraging hierarchical labels for fine-grained accuracy on the large-scale iNaturalist-2018 dataset, demonstrating the effectiveness of visual consistency.** The results are reported from TransHP (Wang et al., 2023b).

iNaturalist-2018 (Acc.)	
Guided	63.11
HiMulConE	63.46
TransHP	64.21
H-CAST	<b>67.13</b>

#### E.5 EVALUATION ON CUB-200-2011 AND FGVC-AIRCRAFT DATASETS.

Table 11 and 12 presents results on CUB and Aircraft datasets. In our experimental results, we first observe a significant performance drop of Hier-ViT compared to Flat-ViT. This highlights a common challenge in hierarchical recognition, where training coarse and fine-grained classifiers simultaneously results in performance degradation, as observed in previous ResNet-based hierarchical recognition models (Chang et al., 2021). Our experiments reveal that this problem also exists in ViT architectures. This indicates that hierarchical recognition is a challenging problem that cannot be solely addressed by providing hierarchy supervision to class tokens. On the other hand, our method consistently outperforms most Flat models.

Compared to ViT-backbone models, Hier-ViT and TransHP, our approach achieves significantly better performance. Specifically, using the *FPA* metric, which captures both accuracy and consistency across all levels, our model outperforms TransHP by +8.2%p on the Aircraft dataset and +2.6%p on the CUB dataset.

We also evaluate BIOCLIP (Stevens et al., 2024), a foundation model for biology, on the CUB dataset, as it focuses on bird categories. BIOCLIP operates as a flat-based hierarchical model, concatenating the entire taxonomy into a single text representation. As a result, all higher-level classes are directly determined by the fine-grained species predictions, resulting in a TICE (Taxonomy-Inconsistency Error) of 0. While BIOCLIP achieves strong performance, its reliance on fine-grained predictions to define coarse classes introduces limitations in accurately predicting higher-level classes.

As Vision Transformer backbone models, when the training dataset is small, such as Aircraft and CUB with around 6K images, HRN, ResNet-based models, demonstrates better performance. However, HRN’s method is highly sensitive to batch size, with a significant drop in performance observed when increasing the batch size from 8 to 64. This sensitivity makes it less suitable for training on large-scale datasets.



Table 11: **Ours consistently shows the best performance on CUB-200-2011.** H-CAST outperforms ViT-backbone models, Hier-ViT and TransHP, by over 6.3 and 2.6 percentage points, respectively. Additionally, it achieves a 3.2 percentage point gain in the FPA metric over the ResNet-based HRN while using significantly fewer parameters. (A higher metric indicates better performance, except for TICE.) Flat models require training three separate models.

		Configuration				CUB-200-2011 (13 - 38 - 200)					
		backbone	#params	input	batch size	FPA	order	family	species	wAP	TICE
Flat	Flat-ViT	ViT-S	65.1M	224 <sup>2</sup>	256	82.30	98.50	94.84	84.78	87.01	5.76
	Flat-CAST	ViT-S	78.5M	224 <sup>2</sup>	256	81.50	98.38	94.82	83.78	86.21	6.14
Hierarchy	FGN	RN-50	24.8M	224 <sup>2</sup>	128	76.08	97.05	91.44	79.29	82.05	7.73
	HRN	RN-50	94.5M	448 <sup>2</sup>	64	80.07	98.17	93.75	83.14	85.52	6.51
	HRN	RN-50	94.5M	448 <sup>2</sup>	8	<b>84.15</b>	<u>98.58</u>	<b>95.39</b>	<b>86.13</b>	<b>88.18</b>	<u>4.62</u>
	BIOCLIP (zeroshot)	ViT-B	149.6M	-	-	78.18	78.18	78.18	78.18	78.18	<b>0.0</b>
	Hier-ViT	ViT-S	21.7M	224 <sup>2</sup>	256	77.03	98.40	92.94	79.43	82.46	8.72
	TransHP	ViT-S	21.7M	224 <sup>2</sup>	128	80.70	96.70	94.15	84.59	86.66	7.16
	Ours (H-CAST)	ViT-S	26.2M	224 <sup>2</sup>	256	<u>83.28</u>	<b>98.65</b>	<u>95.12</u>	<u>84.86</u>	<u>87.13</u>	<b>4.12</b>
Our Gains over SOTA						-0.87	+0.07	-0.27	-1.27	-1.05	+0.50

Table 12: **Evaluation on FGVC-Aircraft.** On the smaller Aircraft dataset, ResNet-based models such as FGN and HRN show good performance. However, our H-CAST achieves better results in the consistency metric (TICE) and performs comparably in the FPA metric. Notably, H-CAST outperforms ViT-backbone models, Hier-ViT and TransHP, by over 11 and 8 percentage points, respectively, in the FPA metric.

		Configuration				FGVC-Aircraft (30 - 70 - 100)					
		backbone	#params	input	batch size	FPA	maker	family	model	wAP	TICE
Flat	Flat-ViT	ViT-S	65.1M	224 <sup>2</sup>	256	76.99	94.27	91.93	80.14	86.39	10.98
	Flat-CAST	ViT-S	78.5M	224 <sup>2</sup>	256	78.22	92.95	88.93	82.39	86.26	10.77
Hierarchy	FGN	RN-50	24.8M	224 <sup>2</sup>	128	<u>85.48</u>	92.44	90.88	<u>88.39</u>	89.87	7.50
	HRN	RN-50	94.5M	448 <sup>2</sup>	64	83.56	94.93	<u>92.68</u>	86.59	<u>89.97</u>	7.26
	HRN	RN-50	94.5M	448 <sup>2</sup>	8	<b>91.39</b>	<b>97.15</b>	<b>95.65</b>	<b>92.32</b>	<b>94.21</b>	<b>3.36</b>
	Hier-ViT	ViT-S	21.7M	224 <sup>2</sup>	256	72.10	92.35	86.26	75.94	82.01	15.75
	TransHP	ViT-S	21.7M	224 <sup>2</sup>	128	75.49	90.16	87.46	81.46	84.86	13.95
	Ours (H-CAST)	ViT-S	26.2M	224 <sup>2</sup>	256	83.72	<u>94.96</u>	91.39	85.33	88.90	<u>5.01</u>
Our Gains over SOTA						-7.67	-2.18	-4.26	-6.99	-5.31	-1.65

## E.6 ADDITIONAL VISUALIZATIONS OF SEGMENTS

We visualize additional examples of feature grouping from fine to coarse for full-path correct and incorrect predictions on the Entity-30 dataset in Figure 10. For full-path correct predictions (all levels correct), visual details are effectively grouped to identify larger objects at coarser levels. In contrast, for full-path incorrect predictions (all levels incorrect), segments fail to recognize the object.

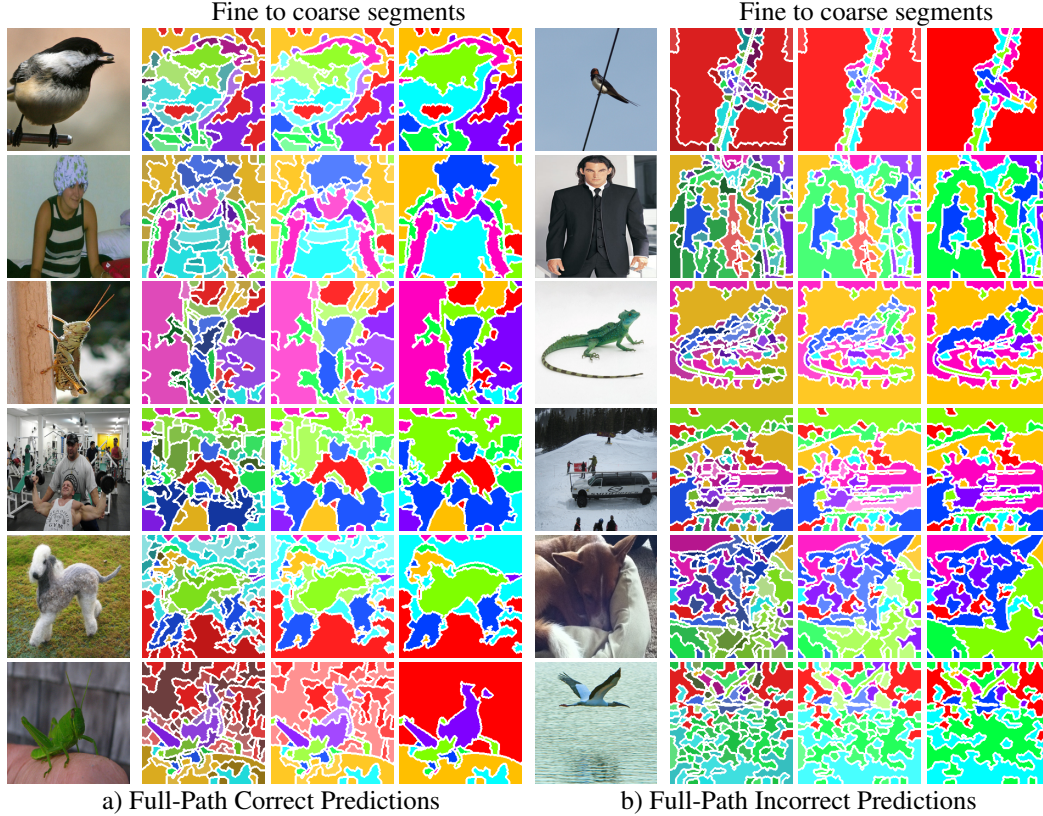


Figure 10: Additional examples of the differences in visual grouping between cases where predictions at all levels are correct and where they are not. Correct predictions show better clustering, while incorrect predictions often exhibit fractured or misaligned groupings.

#### E.7 COMPARISON OF IMAGE SEGMENTATION WITH CAST

To quantitatively evaluate the segmentation results in Figure 8, we use the ImageNet segmentation dataset, ImageNet-S (Gao et al., 2022), to obtain the ground-truth segmentation data for BREEDS dataset. The number of samples in the BREEDS validation data for which ground-truth segmentation data can be obtained from ImageNet-S is 381 for Living-17, 510 for Non-Living-26, 1,336 for Entity-30, and 1,463 for Entity-13. To calculate the region mIOU for fine-level objects, we use the last-level segments (8-way) for segmentation. Following CAST, we name the 8-way segmentations using OvSEG (Liang et al., 2023).

Also, we further visualize the segmentation results on Entity-30 in Figure 11, and show that additional taxonomy information improves segmentation. For example in the first ‘bird’ image, H-CAST is able to segment meaningful parts such as the face, belly, and a branch, with less fractured compared to the CAST. Thus, H-CAST delivers an improvement in segmentation with the benefits of hierarchy.

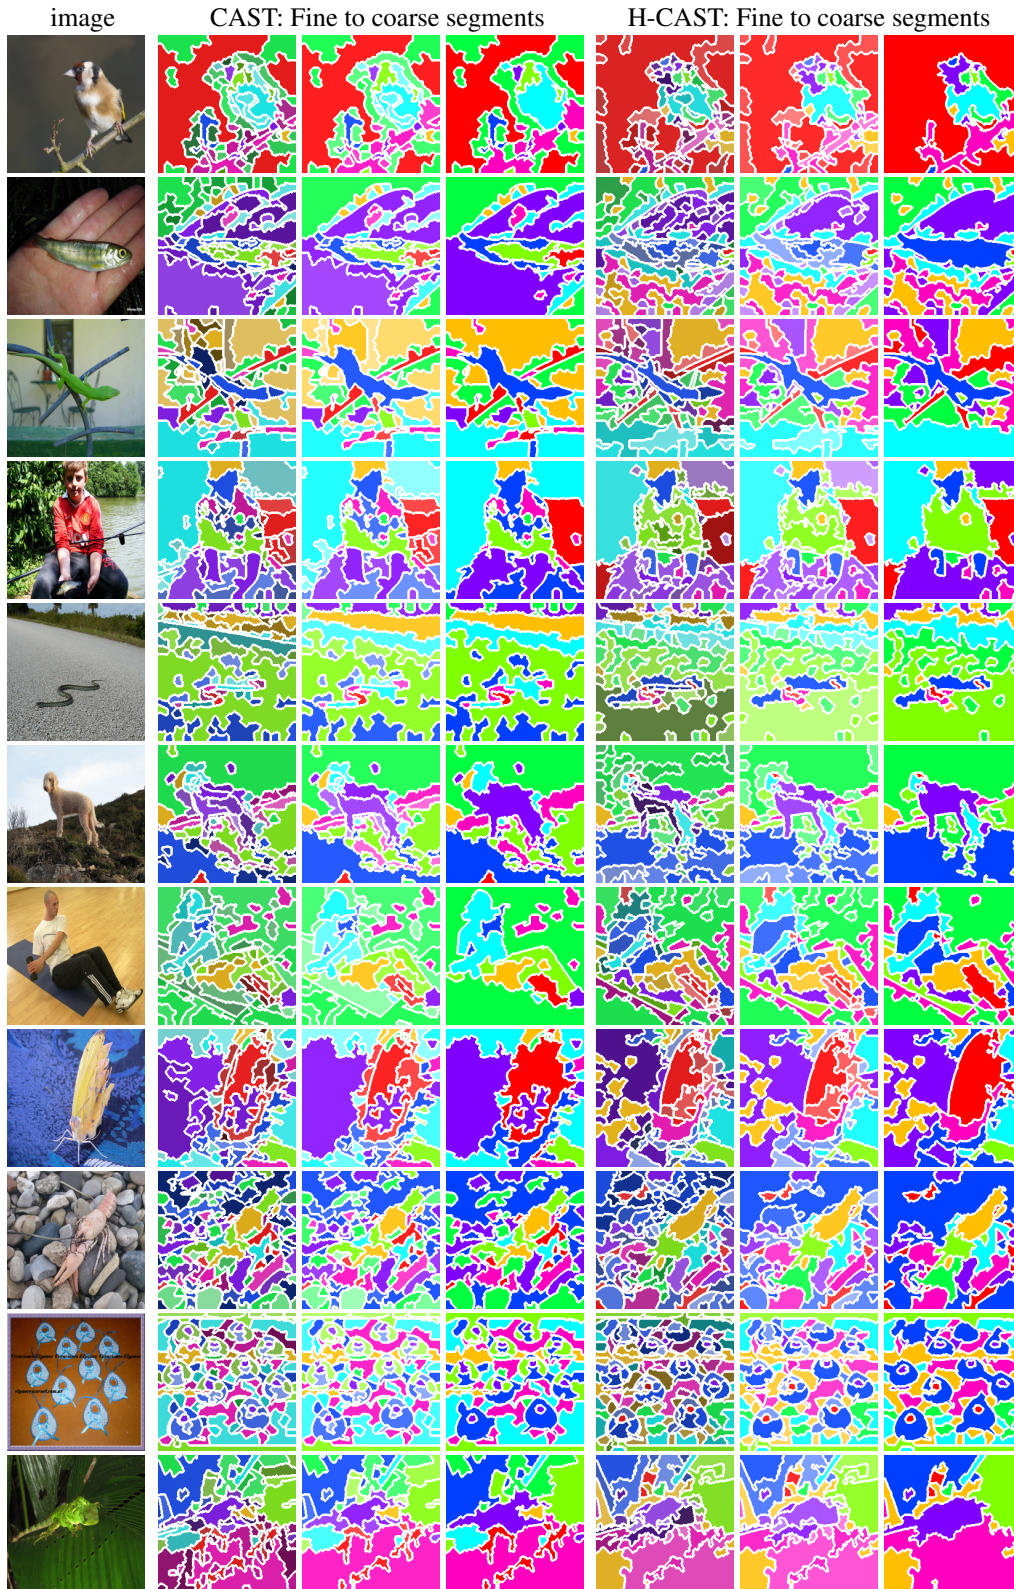


Figure 11: Additional visual results on segmentation show that H-CAST with additional taxonomy information improves segmentation. H-CAST successfully segments meaningful parts with fewer fractures compared to CAST.