

---

# Thought Communication in Multiagent Collaboration

---

Yujia Zheng<sup>1,2</sup> Zhuokai Zhao<sup>2</sup> Zijian Li<sup>3</sup> Yaqi Xie<sup>1</sup>  
Mingze Gao<sup>2</sup> Lizhu Zhang<sup>†,2</sup> Kun Zhang<sup>†,1,3</sup>

<sup>1</sup> CMU <sup>2</sup> Meta AI <sup>3</sup> MBZUAI  
{yujiazh, kunz1}@cmu.edu {zhuokai, lizhu}@meta.com

## Abstract

Natural language has long enabled human cooperation, but its lossy, ambiguous, and indirect nature limits the potential of collective intelligence. While machines are not subject to these constraints, most LLM-based multi-agent systems still rely solely on natural language, exchanging tokens or their embeddings. To go beyond language, we introduce a new paradigm, *thought communication*, which enables agents to interact directly mind-to-mind, akin to telepathy. To uncover these latent thoughts in a principled way, we formalize the process as a general latent variable model, where agent states are generated by an unknown function of underlying thoughts. We prove that, in a nonparametric setting without auxiliary information, both shared and private latent thoughts between any pair of agents can be identified. Moreover, the global structure of thought sharing, including which agents share which thoughts and how these relationships are structured, can also be recovered with theoretical guarantees. Guided by the established theory, we develop a framework that extracts latent thoughts from all agents prior to communication and assigns each agent the relevant thoughts, along with their sharing patterns. This paradigm naturally extends beyond LLMs to all modalities, as most observational data arise from hidden generative processes. Experiments on both synthetic and real-world benchmarks validate the theory and demonstrate the collaborative advantages of thought communication. We hope this work illuminates the potential of leveraging the hidden world, as many challenges remain unsolvable through surface-level observation alone, regardless of compute or data scale.

## 1 Introduction

Natural language has enabled human collaboration at scale, but it also imposes fundamental limitations. While powerful, language is inherently sequential, ambiguous, and imprecise, offering only an indirect and fragmented reflection of thought [von Humboldt, 1988]. This constraint is deeply rooted in human cognition, which lacks direct channels for transmitting mental content. Machines, however, are not subject to the same physical constraints of speech or perception. This difference may be one of the central reasons why superhuman intelligence is possible. Every transformative achievement, from scientific discovery to societal progress, relies on collaboration. Likewise, superhuman intelligence will require not only individual reasoning beyond human capability but also collective reasoning beyond human coordination [Vinge, 1993]. This calls for a new form of communication that transcends the limits of language.

However, existing large language model (LLM)-based multi-agent systems (MAS) rely on natural language as the medium of communication, exchanging information via tokens or their embeddings [Du et al., 2023, Liang et al., 2023, Pham et al., 2023, Zhang et al., 2024a, Zeng et al., 2025, Wang et al., 2025b]. These systems typically assume that multiple LLM agents exchange natural language messages to convey internal ideas and coordinate toward a shared goal. However, natural

---

<sup>†</sup>Equal advising.

language remains fundamentally limited in its ability to express the underlying latent thoughts that drive reasoning and decision making. As a result, current systems remain restricted by the bottlenecks of language, limiting their potential for superhuman collaboration. Indeed, recent empirical analyses [Cemri et al., 2025, Hu et al., 2025] highlight that many failures in inter-agent collaboration stem from vague message specification and inter-agent misalignment, both ultimately caused by the indirect nature of lossy language-based communication. Then, the core question reveals itself:

*What form of communication goes beyond the limits of language?*

To answer this, we turn to the idea of communication through latent *thoughts*. Nothing is more direct than transmitting what one truly thinks, i.e., *telepathy*. Just as human actions are guided by internal mental states, agents likely operate based on latent representations that encode goals, beliefs, and reasoning. If these could be identified, agents could share them directly, bypassing the ambiguity and distortion of language. This enables a fundamentally different mode of communication, based not on the exchange of surface tokens or their embeddings, but on the direct transfer of intent and understanding. Furthermore, in multi-agent settings, some thoughts are intended to be broadly shared, while others are inherently private or uniquely tailored to certain individual agents. Revealing both the latent thoughts and their structural organization allows agents to better detect alignment, resolve conflicts, and integrate diverse reasoning paths.

**Contributions:** We formalize this idea by introducing a latent generative model for inter-agent communication. Specifically, we assume that the model states  $H_t$  of all agents before communication round  $t$  are generated from a set of latent thoughts  $Z_t$  through an unknown function  $f$ , such that  $H_t = f(Z_t)$ . We establish both a nonparametric identifiability result that guarantees recovery of latent thoughts, and a general framework that facilitates direct mind-to-mind communication.

*Theoretically*, we prove that in a general nonparametric setting, both shared and private latent thoughts can be identified from hidden states under a sparsity regularization. Our identifiability result ensures that the recovered latent representations reflect the true internal structure of agent reasoning. Moreover, we show that the structures between thoughts and individual agents can be reliably recovered, enabling a provable correspondence between agents and their cognitive content. Experiments on various synthetic environments confirm the validity of the theory.

*Practically*, we develop a principled framework for latent communication among agents. Guided by the theory, we implement a sparsity-regularized autoencoder to extract latent thoughts from agent hidden states and infer the underlying mapping between agents and these thoughts. Each agent is equipped with a set of inferred thoughts, along with the structure of how each thought is shared. This allows agents not only to understand what others are thinking but also to reason about which thoughts are mutually held or privately maintained. Experiments across diverse models and scenarios demonstrate that communication beyond language directly benefits collaboration among LLM agents.

## 2 Problem Formulation

In this section, we formalize the data-generating process behind agent responses, providing the foundation for our theoretical analysis.

**Data-generating process.** We illustrate the data-generating process in Fig. 1 and formalize it as:

$$Z_t \sim P_z, \quad H_t = f(Z_t), \quad (1)$$

where  $Z_t = (Z_{t,1}, \dots, Z_{t,n_z}) \in \mathbb{R}^{n_z}$  denotes the latent *thoughts* of agents at communication round  $t$ , and  $Z_{t,i} \in \mathbb{R}$  for  $i \in [n_z]$  represents a latent variable denoting a single thought. Let  $n_a$  be the number of agents, at communication round  $t$ , the global model states\* of all agents are given by

$$H_t = (H_t^{(1)}, \dots, H_t^{(n_a)}) = (H_{t,1}, \dots, H_{t,n_h}), \quad (2)$$

\*We refer to this as the *model* state instead of *hidden* state to avoid confusion with the *latent* thoughts  $Z_t$ . Specifically, model state corresponds to the hidden layer representation of the underlying foundation model.

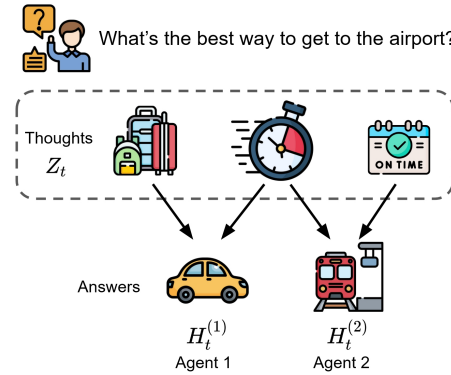


Figure 1: Each agent answers the same question by selecting a subset of latent thoughts  $Z_t$ . Agent 1 chooses a *car* based on *carrying luggage*, while Agent 2 selects a *train* for *schedule punctuality*. Both share the thought of *speed*.

where each  $H_t^{(j)} \in \mathbb{R}^{n_{h_j}}$  summarizes the model states of agent  $A_j$  prior to the communication round  $t$ , and  $n_h = \sum_{j \in [n_a]} n_{h_j}$ . The mapping from latent thoughts to hidden states is governed by an unknown generating function  $f$ , assumed to be invertible (to preserve information) and twice differentiable (to ensure well-defined gradients), following the literature [Hyvärinen et al., 2024].

**Example 1.** Fig. 1 illustrates the data-generating process. In response to the question *What’s the best way to get to the airport?* a set of latent thoughts  $Z_t$  is considered, including factors such as carrying luggage, speed, and punctuality. These thoughts, represented as latent variables  $Z_{t,i}$ , are mapped through the generating function  $f$  to produce each agent’s answers, which are summarized by their model states  $H_t^{(j)}$ . For example, Agent 1 emphasizes thoughts related to *luggage*  and *speed* , resulting in the state  $H_t^{(1)}$  that leads to choosing a *car* . Agent 2, influenced by *speed*  and *schedule punctuality* , forms the state  $H_t^{(2)}$  and selects a *train* . This example illustrates how the underlying process  $f$  encodes shared and private latent thoughts into agent-specific responses.

**The structure of thoughts.** While prior strategies have focused on communication through language or token embeddings, we propose a fundamentally different paradigm where agents share latent thoughts directly. To achieve this, we propose a communication paradigm in which agents access relevant latent thoughts instead of surface-level messages or embeddings. Rather than exposing all latent thoughts  $Z_t$  to every agent uniformly, we focus on learning the structure of the revealed thoughts so that each agent receives only the most relevant information to its goals and role. This requires modeling how thoughts are selectively shared, as some may represent common knowledge useful to many agents, others may be specific or private to individual goals, and some may be irrelevant or even distracting to certain agents.

We formalize the structural dependency between latent thoughts  $Z_t$  and model states  $H_t$  through the non-zero pattern of the Jacobian  $J_f(Z_t)$ , represented as a binary matrix indicating which components of  $Z_t$  influence which components of  $H_t$ :

$$B(J_f) \in \{0, 1\}^{n_h \times n_z}, \quad B(J_f)_{i,j} = \begin{cases} 1 & \exists z_t \in Z_t, J_f(z_t)_{i,j} \neq 0, \\ 0 & \text{otherwise.} \end{cases} \quad (3)$$

The model state of each agent  $A_k$  is represented as a slice  $H_t^{(k)} = (H_{t,k_l}, \dots, H_{t,k_h})$ , where  $k \in [n_a]$ ; and  $\{k_l, \dots, k_h\}$  denotes the index range in  $H_t$  corresponding to agent  $k$ . We define the set of latent thoughts relevant to agent  $A_k$  as

$$Z_{H_t^{(k)}} := \{Z_{t,j} \in Z_t \mid \exists i \in [k_l, k_h] \text{ such that } B(J_f)_{i,j} \neq 0\}. \quad (4)$$

In other words,  $Z_{H_t^{(k)}}$  consists of all latent thoughts that influence at least one component of agent  $A_k$ ’s hidden state, as determined by the non-zero pattern of the Jacobian  $B(J_f(Z_t))$ .

### 3 Identifiability Theory

Before leveraging thought for communication, a critical question arises: how can we ensure that the recovered thoughts correspond to the true ones underlying agent responses? To address this, we establish an identifiability theory for reliably recovering the latent thinking process. We begin with the *identification of the latent thoughts* (§3.1 and §3.2), then explore *the structure between thoughts and agents* (§3.3). All proofs are included in Appx. A.

#### 3.1 Identifiability of Shared Thoughts

Communication often begins with establishing common ground, which typically requires confirming shared beliefs before addressing disagreements. If the shared part of the latent thought can be reliably disentangled from other components, then communication can start from a faithful common basis. Our identifiability result guarantees this: by recovering shared latent variables that are not entangled with any others, we ensure that inter-agent communication is grounded in true cognitive overlap.

We first introduce some additional technical notations. We define the support subspace  $\mathcal{S}_{J_f}$  as the set of matrices  $S \in \mathbb{R}^{n_h \times n_z}$  whose nonzero entries are restricted to the nonzero pattern of  $J_f(Z_t)$ :

$$\mathcal{S}_{J_f} := \{S \in \mathbb{R}^{n_h \times n_z} \mid B(J_f)_{i,j} = 0 \Rightarrow S_{i,j} = 0\}. \quad (5)$$

We further denote  $M$  as a matrix with the same nonzero pattern of  $m(Z_t)$  in  $J_f(Z_t)m(Z_t) = J_{\hat{f}}(\hat{Z}_t)$ , and write  $\stackrel{d}{=}$  to denote equality in distribution.

**Theorem 1** (Identifying the shared thoughts). *Suppose that for each  $i \in [n_x]$ , there exist points where the Jacobians  $J_f(Z_t)_{i,\cdot}$  span the support subspace  $S_{J_{f_{i,\cdot}}}$ , and that  $(J_f(Z_t)M)_{i,\cdot} \in S_{J_{f_{i,\cdot}}}$  at those points. If  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  for a model  $(\hat{f}, \hat{Z}_t)$  following §2 with  $\ell_0$  regularization on  $J_{\hat{f}}$ , then for any pair of agents  $A_i$  and  $A_j$  at round  $t$ , there exists a permutation  $\pi$  over  $[n_z]$  such that  $\frac{\partial Z_i}{\partial Z_{\pi(j)}} = 0$  for any  $Z_i \in Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}}$  and any  $Z_j \in (Z_{H_t^{(i)}} \cup Z_{H_t^{(j)}}) \setminus (Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}})$ .*

**Interpretation and discussion.** Intuitively, Thm. 1 ensures that, up to permutation, the recovered shared thoughts between any pair of agents are disentangled from all other latent variables in the system. The permutation reflects the standard relabeling indeterminacy common to identifiability results [Hyvärinen et al., 2024, Moran and Aragam, 2025]. For instance, in Fig. 1, we can make sure that the recovered thought *speed* 🚗 will not be mixed with others such as *luggage* 🧳 or *schedule punctuality* 🕒. Without this guarantee, any recovered thought can be a mixture of any other thoughts, since the unknown generating function  $f$  is essentially a mixing procedure. Thus, this disentanglement implies the recovery of the target shared components, provided that the generating function is invertible and thus information-preserving. This has practical implications: given any group of agents, we can decompose them into pairs, each yielding identifiable shared thoughts. By composing the recovered components across different pairs, we reconstruct the common cognitive basis and reveal how thoughts are distributed across agents, including the degree of agreement, which is essential for enabling trustworthy and informative latent communication.

**Assumption.** The assumption has been widely adopted in the identifiability literature [Lachapelle et al., 2022, Zheng et al., 2022], which eliminates degenerate cases where the population is too limited for the Jacobian to even reflect the dependency structure. It requires that the generating function  $f$  varies sufficiently across the population so that there exist several points for the Jacobian to span the support subspace  $S_{J_{f_{i,\cdot}}}$ . Requiring  $(J_f(Z_t)M)_{i,\cdot} \in S_{J_{f_{i,\cdot}}}$  holds at these points is also mild due to  $(J_f(Z_t)m(Z_t))_{i,\cdot} = J_{\hat{f}}(\hat{Z}_t)_{i,\cdot}$ , especially in the asymptotic regime where identifiability is defined.

### 3.2 Identifiability of Private Thoughts

In Thm. 1, we established the identifiability of shared thoughts, providing a guarantee for recovering the underlying common ground between agents. However, effective collaboration is not solely about enforcing consensus or resolving disagreements. In fact, homogeneity can be counterproductive in the long term [Prat, 2002]. Just as humans value cognitive diversity as a source of novelty and innovation, different agents may contribute unique perspectives that are essential for solving complex tasks. For instance, in a collaborative planning task, one agent may recognize rare constraints based on its prior experience that others overlook. Preserving such private thoughts can lead to better overall solutions through complementary reasoning. Motivated by this, we now extend our theoretical analysis to show that private thoughts can also be identified:

**Theorem 2** (Identifying the private thoughts). *Suppose the assumption in Thm. 1 holds. If  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  for a model  $(\hat{f}, \hat{Z}_t)$  following §2 with  $\ell_0$  regularization on  $J_{\hat{f}}$ , then for any pair of agents  $A_i$  and  $A_j$  at round  $t$ , there exists a permutation  $\pi$  over  $[n_z]$  such that  $\frac{\partial Z_i}{\partial Z_{\pi(j)}} = 0$  for any  $Z_i \in Z_{H_t^{(i)}} \setminus Z_{H_t^{(j)}}$  and any  $Z_j \in Z_{H_t^{(j)}}$ .*

**Interpretation and discussion.** Similar to Thm. 1, Thm. 2 adopts a pairwise perspective and provides guarantees for recovering the hidden private thoughts of any given agent. Specifically, for any pair of agents, it shows that the private component of either agent can be disentangled from all remaining latent variables. For instance, in Fig. 1, recovered latent variables corresponding to the thought *being able to carry luggage* 🧳 – which may explain Agent 1’s choice of *car* 🚗 – is not entangled with unrelated thoughts like *speed* 🚗 or *schedule punctuality* 🕒, which influence Agent 2’s preference for the *train* 🚊. Without such disentanglement, we risk misattributing the decision to an incorrect or irrelevant latent cause, leading to misalignment in communication.

This again implies that, under invertibility, the true private thoughts can be recovered. By composing the results across different agent pairs, we can infer how agent-specific a given thought is. For example, by analyzing all pairwise decompositions in a large group, we can identify thoughts that are truly unique to individual agents, capturing insights that would otherwise be lost due to their rarity or lack of popularity. This connects naturally to the classical long-tail phenomenon: some thoughts may

be infrequent, but they carry critical value. Our theory ensures that these less common but meaningful components are not discarded, enabling inclusive communication and collaboration among agents.

### 3.3 The Structure of Thoughts

Having established the identifiability of both shared and private thoughts, we now turn to a deeper question: how are these thoughts structurally organized across agents? That is, beyond identifying each thought, can we also identify which agents hold which thoughts? In many scenarios, especially those involving coordination, it is not enough to only know the content of internal reasoning. We must also know how that reasoning is distributed across individuals. We formalize this in Thm. 3:

**Theorem 3** (Identifying the structure of thoughts). *Suppose the assumption in Thm. 1 holds. If  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  for a model  $(\hat{f}, \hat{Z}_t)$  following §2 with  $\ell_0$  regularization on  $J_{\hat{f}}$ , then the nonzero pattern  $B(J_{\hat{f}})$  is identifiable up to relabelling, i.e.,  $B(J_{\hat{f}}) = B(J_f)P$  for a permutation matrix  $P$ .*

**Interpretation and discussion.** Thm. 3 establishes that the structure linking latent thoughts to agents’ internal states is identifiable up to permutation. In other words, we can recover not only the content of each thought, but also determine which agents hold which thoughts, and which thoughts are shared. Returning to Fig. 1, this means we can infer that both agents care about *speed* 🏎️ (shared), while only Agent 1 emphasizes *carrying luggage* 🧳 (private) and only Agent 2 prioritizes *being on time* 🕒 (private). This structure-level recovery is crucial: it enables agents to assess not just what others are thinking, but also how similar or different their internal reasoning is, supporting more informed and adaptive communication. In practical terms, this guarantees that agents can identify points of alignment and divergence without confusion. When scaled to larger systems, this enables the reconstruction of a full thought-agent incidence structure, revealing clusters of agreement, regions of conflict, and sources of novel inputs. Such structural insights are foundational for building systems that coordinate robustly and interpret each other’s intentions with precision.

### 3.4 Discussion on Theoretical Contribution

To the best of our knowledge, this work is the first to consider the latent generative process underlying LLM agent responses and to provide identifiability guarantees for recovering latent thoughts. Beyond its novelty in the multi-agent LLM setting, Thms. 1, 2, and 3 also present a new contribution to classical identifiability theory. Prior work typically focuses on recovering all latent variables (up to standard indeterminacies), with assumptions that go beyond the basic setup that we adopt, such as access to weak supervision [Hyvärinen et al., 2019, Khemakhem et al., 2020], specific function classes [Taleb and Jutten, 1999, Buchholz et al., 2022], or structural criteria on the dependency graph [Moran et al., 2021, Zheng et al., 2022].

In contrast, our approach takes a completely different route. Instead of aiming for global recovery, we focus on pairs of observed variables (agents) and seek to recover as much hidden information as possible from them. Since we rely only on basic assumptions and do not use the additional constraints or auxiliary signals commonly adopted in the identifiability literature, full recovery of all latent variables is known to be impossible. Therefore, we target a coarser perspective that is still meaningful for communication, such as the shared/private thoughts disentangled by our theorems. This is not only practically useful but also theoretically important, as previous methods with global conditions offer no guarantees when their assumptions are even partially violated, while our result still provides alternative guarantees under practical assumptions.

## 4 THOUGHTCOMM: Multiagent Communication via Thought

Based on the established theory, we propose a practical framework, THOUGHTCOMM, for multi-agent collaboration in which agents exchange *thoughts* directly. At each communication round  $t$ , we first encode the agents’ model states into a shared latent space that captures their internal thoughts. These latent thoughts are then processed and selectively reintegrated into each agent’s context based on the structured relationship between thoughts and agents. This allows each agent to gain a global sense of what others are thinking, and to distinguish which thoughts are shared or agent-specific.

### 4.1 Uncovering the Latent Thoughts

Each agent  $A_i$  maintains a model state  $H_t^{(i)} \in \mathbb{R}^{n_{h_i}}$  corresponding to the representation of its last generated token immediately before communication round  $t$ , contextualizing the text summarizing their own response. We concatenate these states from all  $n$  agents into a single vector as in Eq. 1.

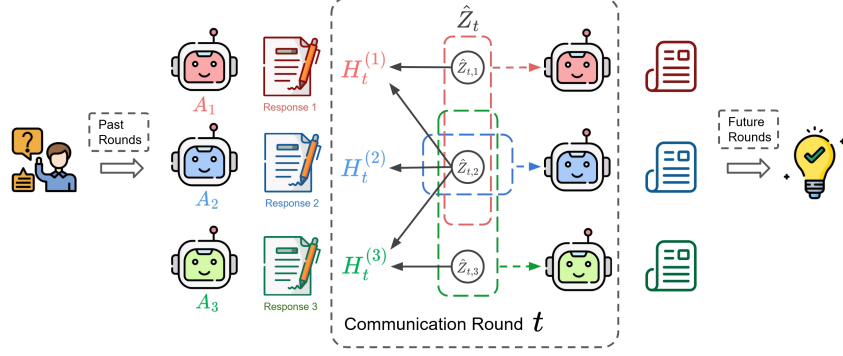


Figure 2: Overview of THOUGHTCOMM. At each communication round  $t$ , agents encode their model states  $H_t^{(i)}$  into a shared latent space via a sparsity-regularized autoencoder, yielding latent thoughts  $\hat{Z}_t$ . Each dimension  $\hat{Z}_{t,j}$  is selectively routed to relevant agents based on the recovered dependency structure, allowing agents to identify both shared and private thoughts for reasoning. The corresponding latent thoughts are then injected into each agent model via prefix adaptation to guide the next response. These updated responses form the input to the next round, enabling multi-agent collaboration beyond purely message exchange.

Then we aim to uncover the hidden process that generate these states from the latent thought of agents. According to the formulation in §2, there exists an underlying process  $f$  that generates the agents' responses  $H_t$  based on their hidden thoughts  $Z_t$ , i.e.,  $H_t = f(Z_t)$ .

In the proposed framework, the concatenated state  $H_t$  is mapped into a latent space via a *sparsity-regularized autoencoder* with  $\ell_1$  regularization on  $J_{\hat{f}}$ . The resulting latent thoughts  $\hat{Z}_t$  are recovered through its encoder  $\hat{f}^{-1}$ :

$$\hat{Z}_t = \hat{f}^{-1}(H_t) \in \mathbb{R}^{n_z}. \quad (6)$$

The connection between our estimation  $\hat{Z}_t$  and the ground-truth latent thoughts  $Z_t$  is built by our identifiability theory established in §3. The structure of the latent thought  $Z_t$  is governed by the Jacobian  $J_f(Z_t) \in \mathbb{R}^{n_h \times n_z}$ , whose non-zero pattern  $B_{J_f}$  reveals which latent dimensions are influenced by which agents' states. The autoencoder is trained to reconstruct the full state vector:

$$\mathcal{L}_{\text{rec}} = \|H_t - \hat{f}(\hat{Z}_t)\|_2^2 + \|J_{\hat{f}}\|_1, \quad (7)$$

ensuring consistency between  $H_t$  and its reconstruction via  $\hat{Z}_t$ , as well as the required sparsity regularization on the Jacobian. This enforces observational equivalence between the estimated and ground-truth processes, which serves as the foundation for identifiability. At test time, we use the trained encoder  $\hat{f}^{-1}$  to extract latent thoughts  $\hat{Z}_t$  from hidden states  $H_t$ , and leverage the recovered dependency structure  $B_{J_f}$  to determine which latent dimensions of  $\hat{Z}_t$  are relevant for each agent.

## 4.2 Leveraging the Structure of Thoughts

To provide personalized access to latent thoughts, we adopt an agreement-based reweighting strategy. Specifically, for agent  $A_i$  at communication round  $t$ , we first identify the set of latent thoughts  $\hat{Z}_{H_t^{(i)}}$  that influence its model state, i.e.,  $\hat{Z}_{H_t^{(i)}} := \left\{ \hat{Z}_{t,j} \in \hat{Z}_t \mid \exists q \in [i_l, i_h] \text{ such that } B(J_{\hat{f}})_{q,j} \neq 0 \right\}$ . These latent thoughts are then partitioned into groups based on their level of agreement across agents, measured by the number of agents whose hidden states in  $\hat{H}_t$  depend on each latent dimension in thoughts  $\hat{Z}_t$ . Formally, for every  $\hat{Z}_{t,j} \in \hat{Z}_{H_t^{(i)}}$ , we define its agent agreement as:

$$\alpha_j = \sum_{k=1}^{n_a} \mathbb{I}(\hat{Z}_{t,j} \in \hat{Z}_{H_t^{(k)}}), \quad (8)$$

where  $\mathbb{I}(\cdot)$  is the indicator function. Latent thoughts are then grouped by their agreement level  $\alpha_j$ .

Each group is assigned a distinct weight  $w_{\alpha_j}$ , reflecting the relevance or generality of these thoughts across agents. The new latent representation for agent  $A_i$  is constructed by combining all groups

$$\tilde{Z}_t^{(i)} = \text{concat}_{\alpha}(w_{\alpha_j} \cdot \hat{Z}_{t,\alpha}^{(i)}), \quad (9)$$

where  $\hat{Z}_{t,\alpha}^{(i)}$  denotes the subset of latent variables in  $\hat{Z}_{H_t^{(i)}}$  with agreement level  $\alpha$ , i.e.,

$$\hat{Z}_{t,\alpha}^{(i)} = \left\{ \hat{Z}_{t,j} \in \hat{Z}_{H_t^{(i)}} \mid \alpha_j = \alpha \right\}. \quad (10)$$

Intuitively, the recovered dependency structure plays a critical role in shaping how latent thoughts are routed to each agent. After extracting the shared latent space via the sparsity-regularized autoencoder, we apply a structural mask to ensure that each agent only receives the latent dimensions that are relevant to its own internal representation. This filtering directly affects how the injected prefixes are constructed for each agent during the next round of generation. The agreement weights further distinguish different types of relevant thoughts. Although the surface-level messages are broadcast, the actual content used to condition each agent’s reasoning is selectively and adaptively constructed in the latent space, reflecting the personalized structure of shared and private thoughts.

### 4.3 Latent Injection via Prefix Adaptation

To seamlessly integrate the recovered latent thoughts into agent behavior, we incorporate them into the generation process via *prefix adaptation*. For each agent  $A_i$ , we construct a prefix vector from its personalized latent representation  $\tilde{Z}_t^{(i)}$  via a learned adapter function:

$$P_t^{(i)} = g(\tilde{Z}_t^{(i)}) \in \mathbb{R}^{m \times d}, \quad (11)$$

where  $m$  is the prefix length and  $d$  is the embedding dimension. Following Li and Liang [2021], we prepend the resulting prefix  $P_t^{(i)}$  to the token embeddings of agent  $A_i$  in the next generation step, leveraging the latent thoughts to guide response generation without explicit message passing.

To train the adapter  $g$ , we inject its output as a prefix and generate a brief continuation (e.g., one sentence), keeping it short to focus on linguistic coherence rather than influencing the actual solution. The few generated tokens are compared against a reference using a semantic similarity loss and a standard regularization term that promotes linguistic fluency:

$$\mathcal{L}_{\text{comm}} = \sum_{i=1}^{n_a} \sum_{t=1}^T \left[ (1 - \cos(\bar{\phi}(y_{t,i}^{\text{gen}}), \bar{\phi}(y_{t,i}^{\text{ref}}))) - \log p(y_{t,i}^{\text{gen}} \mid \text{context}_{t,i}, P_t^{(i)}) \right], \quad (12)$$

where  $y_{t,i}^{\text{gen}}$  denotes the tokens generated by agent  $A_i$  at round  $t$ ,  $y_{t,i}^{\text{ref}}$  is a reference from the model without latent communication,  $\text{context}_{t,i}$  denotes the dialogue history or prompt available to agent  $A_i$ , and  $P_t^{(i)}$  is the injected prefix produced by the adapter.  $\bar{\phi}(\cdot)$  denotes the mean token embedding. The goal is not to replicate the content of baseline generations, but to ensure that the adapter produces latent modifications whose injected effects remain linguistically natural.

**Remark 1.** Since the autoencoder is trained only to reconstruct model states, and the adapter is guided simply to avoid producing semantically absurd responses, both components remain largely *task-agnostic* and can be pretrained once and reused. This modular design allows latent communication to be applied across different tasks without retraining, enabling easy integration into multi-agent generation systems with minimal overhead.

## 5 Experiments

In this section, we conduct both synthetic and real-world experiments across various settings. Part of the implementation details are deferred to Appx. C.

### 5.1 Synthetic Evaluation

We begin with synthetic experiments to validate the identifiability of latent thoughts. For the basic setup corresponding to our running example in Fig. 1, we consider two observed variables,  $X_A$  and  $X_B$ , and three latent ones:  $Z_A \setminus Z_B$ ,  $Z_B \setminus Z_A$ , and  $Z_A \cap Z_B$ , to evaluate whether shared and private latent variables can be correctly recovered. The datasets are generated by a random invertible transformation from multivariate Laplacian variables. We train a sparsity-regularized autoencoder on these datasets and compute the standard  $R^2$  score between each part of the estimated and ground-truth latents. A baseline model without sparsity regularization is also included for comparison.

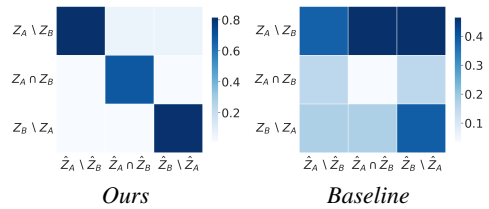


Figure 3:  $R^2$  of two models.

The results are shown in Fig. 3. A higher  $R^2$  indicates closer correspondence between the estimated latent variables and the matching ground-truth components, and vice versa. Our model clearly identifies the shared region  $Z_A \cap Z_B$  and the private regions  $Z_A \setminus Z_B$  and  $Z_B \setminus Z_A$ , while the baseline fails to disentangle them.

Beyond the basic setup, we evaluate whether incorporating multiple pairs of observed variables in a complex system enables recovery of most latent variables, as considering all pairs of agents reveals exponentially more information than any single pair alone. Following the identifiability literature, we compute the mean correlation coefficient (MCC) between estimated and ground-truth latents across 8 settings, with dimensionality ranging from 124 to 1024 and equal numbers of latent and observed variables. Results are shown in Fig. 4. The red line marks the threshold typically considered identifiable when exceeded. Our model consistently recovers most latent variables across all settings, highlighting the global identifiability.




Figure 4: MCC across setups.

## 5.2 Real-World Evaluation

Recent empirical analyses [Cemri et al., 2025, Hu et al., 2025] reveal that LLM-based multi-agent systems frequently struggle with reasoning tasks, demonstrating only modest improvements over strong single-agent baselines due to coordination inefficiencies and communication bottlenecks – challenges that THOUGHTCOMM is explicitly expected to address. Therefore, we evaluate THOUGHTCOMM on two widely used math reasoning benchmarks, MATH [Hendrycks et al., 2021] and GSM8K [Cobbe et al., 2021] to assess its real-world effectiveness. For the main experiments in this section, we follow Subramaniam et al. [2025] by using three agents engaging in two rounds of debate.

**Baselines.** As the proposed THOUGHTCOMM introduces an additional training stage, the most direct baseline is Multiagent Finetuning [Subramaniam et al., 2025], which is the current state-of-the-art in maximizing multi-agent collaboration through specialized roles and multiple finetuning rounds. We also include single-LLM performance, referred to as "single answer," for comparison. It is worth noting that there are many other multi-agent collaboration workflows; our objective here is to validate the potential of the proposed paradigm rather than exhaustively compare all possible strategies.

**Data pre-processing and evaluation metrics.** Following Subramaniam et al. [2025], we randomly sample 500 examples for fine-tuning the latent communication module, which includes both an autoencoder and an adapter, while reserving another 500 examples for evaluation. We select the more challenging questions for evaluation (e.g., level-3 complexity in MATH [Hendrycks et al., 2021]) when applicable. Generated responses are parsed and evaluated against the ground truths, with *accuracy* measured as the percentage of correctly generated answers. To quantify the reliability of these estimates, we also report the standard deviation for each accuracy score. Beside accuracy, we include a *consensus* score, defined as the proportion of final-round instances where all agents reached a unanimous decision, providing a more direct measure of communication effectiveness.

**Models.** We evaluated both the baseline methods and THOUGHTCOMM on five latest LLMs of varying model sizes, including Llama-3-8B-Instruct [Grattafiori et al., 2024], Phi-4-mini-instruct [Abdin et al., 2024], Qwen-3-0.6B, Qwen-3-1.7B [Yang et al., 2025], as well as the Deepseek-R1-distilled-Llama-8B [Guo et al., 2025].

**Main results.** Table 1 presents the main results, showing that THOUGHTCOMM consistently outperforms baseline methods across both the MATH [Hendrycks et al., 2021] and GSM8K [Cobbe et al., 2021] benchmarks. Within all base models, THOUGHTCOMM demonstrates clear improvements over both single answer and Multiagent Finetuning [Subramaniam et al., 2025]. For instance, on Qwen 3-1.7B, THOUGHTCOMM achieves 93% accuracy on MATH, representing an 17.2% absolute gain over Multiagent Finetuning and a 113.3% relative improvement over the single answer baseline. On average, THOUGHTCOMM achieves 67.23% relative improvement over single answer and 19.06% over the current state-of-the-art. In terms of consensus, THOUGHTCOMM also outperforms all baselines by a clear margin, with its improved consensus directly translating to higher accuracy, indicating superior inter-agent alignment enabled by efficient mind-to-mind communication. These gains are consistently observed across models ranging from 0.6B to 8B parameters, demonstrating the scalability and robustness of the proposed approach across a broad range of model sizes.

Additionally, unlike Multiagent Finetuning [Subramaniam et al., 2025], which requires finetuning the entire LLM and thus incurs substantial overhead, THOUGHTCOMM only trains a lightweight

Table 1: Evaluation results on MATH [Hendrycks et al., 2021] and GSM8K [Cobbe et al., 2021] for various methods with five different LLMs. Bold numbers indicate the best performance.

| Base Model                   | Methods               | MATH                               |               | GSM8K                              |               |
|------------------------------|-----------------------|------------------------------------|---------------|------------------------------------|---------------|
|                              |                       | Accuracy (%)                       | Consensus (%) | Accuracy (%)                       | Consensus (%) |
| Qwen 3-0.6B                  | Single Answer         | 45.80 $\pm$ 2.23                   | N/A           | 58.20 $\pm$ 2.21                   | N/A           |
|                              | Multiagent Finetuning | 71.20 $\pm$ 2.03                   | 90.07         | 70.80 $\pm$ 2.03                   | 86.40         |
|                              | THOUGHTCOMM           | <b>85.00 <math>\pm</math> 1.60</b> | <b>91.20</b>  | <b>75.80 <math>\pm</math> 1.92</b> | <b>89.27</b>  |
| Qwen 3-1.7B                  | Single Answer         | 43.60 $\pm$ 2.22                   | N/A           | 67.40 $\pm$ 2.10                   | N/A           |
|                              | Multiagent Finetuning | 75.80 $\pm$ 1.92                   | 95.80         | 84.20 $\pm$ 1.63                   | 96.73         |
|                              | THOUGHTCOMM           | <b>93.00 <math>\pm</math> 1.14</b> | <b>95.93</b>  | <b>85.00 <math>\pm</math> 1.60</b> | <b>97.87</b>  |
| Phi-4-mini-instruct (3.84B)  | Single Answer         | 63.80 $\pm$ 2.15                   | N/A           | 81.60 $\pm$ 1.73                   | N/A           |
|                              | Multiagent Finetuning | 60.20 $\pm$ 2.19                   | 78.89         | 82.16 $\pm$ 1.71                   | 91.24         |
|                              | THOUGHTCOMM           | <b>74.60 <math>\pm</math> 1.95</b> | <b>84.73</b>  | <b>84.20 <math>\pm</math> 1.63</b> | <b>94.73</b>  |
| LLaMA 3-8B-Instruct          | Single Answer         | 36.20 $\pm$ 2.15                   | N/A           | 60.80 $\pm$ 2.18                   | N/A           |
|                              | Multiagent Finetuning | 39.68 $\pm$ 2.19                   | 68.97         | <b>69.20 <math>\pm</math> 2.06</b> | 80.20         |
|                              | THOUGHTCOMM           | <b>45.60 <math>\pm</math> 2.23</b> | <b>74.67</b>  | 68.40 $\pm$ 2.08                   | <b>84.87</b>  |
| DeepSeek-R1-Distill-Llama-8B | Single Answer         | 42.60 $\pm$ 2.21                   | N/A           | 65.60 $\pm$ 2.12                   | N/A           |
|                              | Multiagent Finetuning | 72.40 $\pm$ 2.00                   | <b>82.87</b>  | 76.80 $\pm$ 1.89                   | 83.13         |
|                              | THOUGHTCOMM           | <b>82.80 <math>\pm</math> 1.69</b> | 80.72         | <b>80.80 <math>\pm</math> 1.76</b> | <b>88.13</b>  |

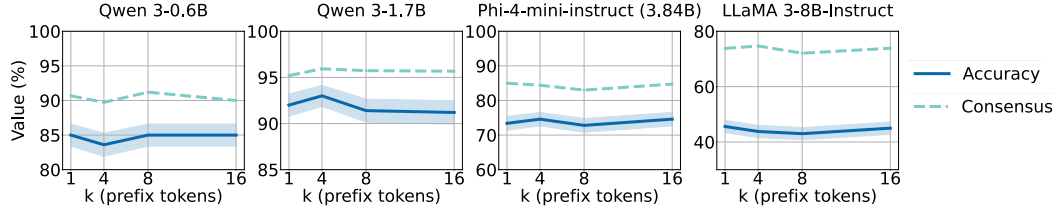


Figure 5: Two-agent THOUGHTCOMM with accuracy (solid) and consensus (dashed) performance on MATH [Hendrycks et al., 2021] as prefix length increases from 1 to 16.

autoencoder and adapter, whose computational cost depends only on the LLM’s embedding dimension rather than the parameter count. This results in fundamentally smaller and model-agnostic training overhead, enabling efficient and scalable deployment even for very large LLMs. For instance, both Llama-3-70B and 405B share a 16,384 embedding dimension; thus, THOUGHTCOMM’s overhead remains unchanged when moving from 70B to 405B, whereas Multiagent Finetuning [Subramaniam et al., 2025] would require substantially more training cost at each scale. Overall, these results validate both the efficiency and effectiveness of the proposed THOUGHTCOMM, supporting the theoretical predictions of enhanced coordination and cognitive alignment in multi-agent LLMs.

### 5.3 Scaling the Number of Debate Rounds

We further investigate how the number of debate rounds impacts multi-agent performance, as more rounds may introduce redundant or confusing information that can degrade results. With two agents, we vary the number of rounds from 2 to 6 and evaluate on the MATH [Hendrycks et al., 2021] benchmark using LLaMA-3-8B-Instruct [Grattafiori et al., 2024], following the setup in §5.2. As shown in Fig. 6, Multiagent Finetuning suffers a drop in accuracy with more rounds, while consensus slightly increases and maintains. In contrast, THOUGHTCOMM achieves simultaneous gains in both accuracy and consensus, demonstrating robustness to redundancy and noise by consistently identifying true latent *thoughts*.

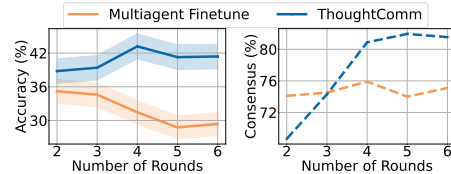


Figure 6: Multi-agent performance as the number of debate rounds increases.

### 5.4 Varying the Prefix Lengths

As discussed in §4.3, the prefix length  $m$  determines how many thought vectors are injected into agent context. A key question is whether THOUGHTCOMM remains robust as  $m$  grows, or if excessive prefixes introduce redundant or irrelevant information that degrades performance. To answer these questions, we sweep the prefix length  $m \in \{1, 4, 8, 16\}$  across four models with different parameter sizes (Llama-3-8B-Instruct [Grattafiori et al., 2024], Phi-4-mini-instruct [Abdin et al., 2024], Qwen-3

0.6B, and Qwen-3 1.7B [Yang et al., 2025]) on the MATH [Hendrycks et al., 2021] benchmark, using the same 500/500 train/test split from §5.2. As shown in Fig. 5, both accuracy and consensus stay remarkably stable for all four models, with performance fluctuations under five percent even as  $m$  increases sixteen-fold. These results demonstrate a clear robustness advantage of THOUGHTCOMM by delivering reliable gains without requiring precise tuning of the prefix length, dramatically reducing hyperparameter overhead in practice. Moreover, achieving near-optimal performance with a single injected vector highlights the efficiency of our thought-communication mechanism. While both token and prefix embeddings have the same dimensionality (e.g., 1024), a token embedding is tied to a single vocabulary item and typically encodes the semantics of just that one discrete token, often lying on a lower-dimensional subspace. In contrast, a prefix embedding is a free parameter optimized to encode many continuous latent thoughts, leveraging the full capacity of the embedding space.

## 6 Related Works

**Multiagent LLMs communication.** LLM-based multi-agent systems (MAS) have become a compelling strategy for advancing beyond the limitations of single LLMs [Li et al., 2023, Wu et al., 2023, Hong et al., 2023, Guo et al., 2024, Tran et al., 2025]. Specifically, multi-agent debate [Du et al., 2023, Pham et al., 2023, Liang et al., 2023], which mimics human collaborative reasoning, has shown particular promise by amplifying reasoning through collective, diverse exchanges. One of the most central factors that determines MAS effectiveness is the communication paradigm between agents [Li et al., 2024, Cemri et al., 2025]. Extensive research has sought to improve this paradigm, exploring various directions such as improving communication efficiency [Zhang et al., 2024a, Wang et al., 2025b, Zeng et al., 2025], enabling more flexible topologies and workflows [Khattab et al., 2023, Zhang et al., 2024b, Liu et al., 2024, Wu et al., 2024, Wang et al., 2024, 2025a], mitigating error propagation [Wang et al., 2023, Yoffe et al., 2024], shifting from turn-based, full-response discussion to token-level collaboration [Bian et al., 2025, Chakraborty et al., 2025], and moving beyond text tokens to token embeddings [Pham et al., 2023]. However, all these approaches fundamentally rely on the exchange of natural language, either through text tokens or their embeddings, thus inheriting the constraints of human-style communication. In contrast, THOUGHTCOMM pioneers a new communication paradigm by extracting and uncovering the underlying *latent thoughts* beneath surface-level language tokens and embeddings, enabling a more direct and expressive form of MAS communication and collaboration.

**Identifiability of latent variable models.** Classical identifiability results in latent variable models largely focus on linear settings, offering strong guarantees through factor analysis, structural equations, and ICA [Reiersøl, 1950, Lawley and Maxwell, 1962, Aigner et al., 1984, Comon, 1994, Bekker and ten Berge, 1997, Bishop, 1998]. To relax linearity, previous work introduces auxiliary variables [Hyvärinen and Morioka, 2016, Hyvärinen et al., 2019, Yao et al., 2021, Hälvä et al., 2021, Lachapelle et al., 2022, Song et al., 2024, Li et al., 2025a], structural constraints on the mixing function [Taleb and Jutten, 1999, Moran et al., 2021, Kivva et al., 2022, Zheng et al., 2022, Buchholz et al., 2022, Zheng et al., 2025], or the synergy of both [Zheng and Zhang, 2023, Li et al., 2025b]. Causal representation learning often depends on interventions [von Kügelgen et al., 2023, Jiang and Aragam, 2023, Jin and Syrgkanis, 2023, Zhang et al., 2024c] or counterfactual views [von Kügelgen et al., 2021, Brehmer et al., 2022]. These approaches typically require parametric assumptions or external signals. With a weaker goal of identifying only shared and private thoughts and their structures across agents, our framework can be applied in the general nonparametric setting without such aids.

## 7 Conclusion

To enable LLM agents to communicate through thoughts, we formulate multi-agent communication as a latent variable model to explore agents’ minds. We establish identifiability results under general conditions to ensure reliable recovery of latent thoughts and structures, and propose a new framework, THOUGHTCOMM, for effective collaboration via thought. While this introduces a new direction, certain *limitations* remain. Our experiments focus on using model states as observed variables, which may not be feasible for closed-source models. A promising alternative is to replace them with context-aware embeddings of the observational data and recover latent thoughts from those. The observational data need not be textual and can span any modality, extending the framework beyond LLMs. Although we have not explored this empirically, as generating embeddings suitable for summarization is a separate topic, the theory and framework can accommodate this extension directly. We hope this work sheds light on the hidden world beneath observation, as many challenges remain unsolvable through surface-level observation, regardless of scale in data or compute.

## Acknowledgment

The authors would like to thank the anonymous reviewers and AC for helpful comments and suggestions during the reviewing process. The authors would also like to acknowledge the support from NSF Award No. 2229881, AI Institute for Societal Decision Making (AI-SDM), the National Institutes of Health (NIH) under Contract R01HL159805, and grants from Quris AI, Florin Court Capital, MBZUAI-WIS Joint Program, and the AI Deira Causal Education project.

## References

- Marah Abdin, Jyoti Aneja, Harkirat Behl, Sébastien Bubeck, Ronen Eldan, Suriya Gunasekar, Michael Harrison, Russell J Hewett, Mojan Javaheripi, Piero Kauffmann, et al. Phi-4 technical report. *arXiv preprint arXiv:2412.08905*, 2024.
- Dennis J Aigner, Cheng Hsiao, Arie Kapteyn, and Tom Wansbeek. Latent variable models in econometrics. *Handbook of econometrics*, 2:1321–1393, 1984.
- Paul A Bekker and Jos MF ten Berge. Generic global identification in factor analysis. *Linear Algebra and its Applications*, 264:255–263, 1997.
- Yuang Bian, Yupian Lin, Jingping Liu, and Tong Ruan. Ptoco: Prefix-based token-level collaboration enhances reasoning for multi-llms. In *Proceedings of the 31st International Conference on Computational Linguistics*, pages 8326–8335, 2025.
- Christopher M Bishop. Latent variable models. In *Learning in graphical models*, pages 371–403. Springer, 1998.
- Johann Brehmer, Pim De Haan, Phillip Lippe, and Taco S Cohen. Weakly supervised causal representation learning. *Advances in Neural Information Processing Systems*, 35:38319–38331, 2022.
- Simon Buchholz, Michel Besserve, and Bernhard Schölkopf. Function classes for identifiable nonlinear independent component analysis. *arXiv preprint arXiv:2208.06406*, 2022.
- Mert Cemri, Melissa Z Pan, Shuyi Yang, Lakshya A Agrawal, Bhavya Chopra, Rishabh Tiwari, Kurt Keutzer, Aditya Parameswaran, Dan Klein, Kannan Ramchandran, et al. Why do multi-agent llm systems fail? *arXiv preprint arXiv:2503.13657*, 2025.
- Souradip Chakraborty, Sujay Bhatt, Udari Madhushani Sehwag, Soumya Suvra Ghosal, Jiahao Qiu, Mengdi Wang, Dinesh Manocha, Furong Huang, Alec Koppel, and Sumitra Ganesh. Collab: Controlled decoding using mixture of agents for llm alignment. *arXiv preprint arXiv:2503.21720*, 2025.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Pierre Comon. Independent component analysis, a new concept? *Signal processing*, 36(3):287–314, 1994.
- Yilun Du, Shuang Li, Antonio Torralba, Joshua B Tenenbaum, and Igor Mordatch. Improving factuality and reasoning in language models through multiagent debate. In *Forty-first International Conference on Machine Learning*, 2023.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Taicheng Guo, Xiuying Chen, Yaqi Wang, Ruidi Chang, Shichao Pei, Nitesh V Chawla, Olaf Wiest, and Xiangliang Zhang. Large language model based multi-agents: A survey of progress and challenges. *arXiv preprint arXiv:2402.01680*, 2024.

- Hermanni Hälvä, Sylvain Le Corff, Luc Lehéricy, Jonathan So, Yongjie Zhu, Elisabeth Gassiat, and Aapo Hyvärinen. Disentangling identifiable features from noisy data with structured nonlinear ICA. *Advances in Neural Information Processing Systems*, 34, 2021.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv preprint arXiv:2103.03874*, 2021.
- Sirui Hong, Xiwu Zheng, Jonathan Chen, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Zili Wang, Steven Ka Shing Yau, Zijuan Lin, Liyang Zhou, et al. Metagpt: Meta programming for multi-agent collaborative framework. *arXiv preprint arXiv:2308.00352*, 3(4):6, 2023.
- Jinwei Hu, Yi Dong, Shuang Ao, Zhuoyun Li, Boxuan Wang, Lokesh Singh, Guangliang Cheng, Sarvapali D Ramchurn, and Xiaowei Huang. Position: Towards a responsible llm-empowered multi-agent systems. *arXiv preprint arXiv:2502.01714*, 2025.
- Aapo Hyvärinen and Hiroshi Morioka. Unsupervised feature extraction by time-contrastive learning and nonlinear ICA. *Advances in Neural Information Processing Systems*, 29:3765–3773, 2016.
- Aapo Hyvärinen, Hiroaki Sasaki, and Richard Turner. Nonlinear ICA using auxiliary variables and generalized contrastive learning. In *International Conference on Artificial Intelligence and Statistics*, pages 859–868. PMLR, 2019.
- Aapo Hyvärinen, Ilyes Khemakhem, and Ricardo Monti. Identifiability of latent-variable and structural-equation models: from linear to nonlinear. *Annals of the Institute of Statistical Mathematics*, 76(1):1–33, 2024.
- Yibo Jiang and Bryon Aragam. Learning nonparametric latent causal graphs with unknown interventions. *Advances in Neural Information Processing Systems*, 36:60468–60513, 2023.
- Jikai Jin and Vasilis Syrgkanis. Learning causal representations from general environments: Identifiability and intrinsic ambiguity. *arXiv preprint arXiv:2311.12267*, 2023.
- Omar Khattab, Arnav Singhvi, Paridhi Maheshwari, Zhiyuan Zhang, Keshav Santhanam, Sri Vardhamanan, Saiful Haq, Ashutosh Sharma, Thomas T Joshi, Hanna Moazam, et al. Dspy: Compiling declarative language model calls into self-improving pipelines. *arXiv preprint arXiv:2310.03714*, 2023.
- Ilyes Khemakhem, Diederik Kingma, Ricardo Monti, and Aapo Hyvärinen. Variational autoencoders and nonlinear ICA: A unifying framework. In *International Conference on Artificial Intelligence and Statistics*, pages 2207–2217. PMLR, 2020.
- Bohdan Kivva, Goutham Rajendran, Pradeep Ravikumar, and Bryon Aragam. Identifiability of deep generative models without auxiliary information. *Advances in Neural Information Processing Systems*, 35:15687–15701, 2022.
- Sébastien Lachapelle, Pau Rodríguez López, Yash Sharma, Katie Everett, Rémi Le Priol, Alexandre Lacoste, and Simon Lacoste-Julien. Disentanglement via mechanism sparsity regularization: A new principle for nonlinear ICA. *Conference on Causal Learning and Reasoning*, 2022.
- David N Lawley and Adam E Maxwell. Factor analysis as a statistical method. *Journal of the Royal Statistical Society. Series D (The Statistician)*, 12(3):209–229, 1962.
- Guohao Li, Hasan Hammoud, Hani Itani, Dmitrii Khizbullin, and Bernard Ghanem. Camel: Communicative agents for "mind" exploration of large language model society. *Advances in Neural Information Processing Systems*, 36:51991–52008, 2023.
- Xiang Lisa Li and Percy Liang. Prefix-tuning: Optimizing continuous prompts for generation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4582–4597, 2021.
- Xinyi Li, Sai Wang, Siqi Zeng, Yu Wu, and Yi Yang. A survey on llm-based multi-agent systems: workflow, infrastructure, and challenges. *Vicinagearth*, 1(1):9, 2024.

- Yuke Li, Yujia Zheng, Guangyi Chen, Kun Zhang, and Heng Huang. Identification of intermittent temporal latent process. In *The Thirteenth International Conference on Learning Representations*, 2025a.
- Zijian Li, Shunxing Fan, Yujia Zheng, Ignavier Ng, Shaoan Xie, Guangyi Chen, Xinshuai Dong, Ruichu Cai, and Kun Zhang. Synergy between sufficient changes and sparse mixing procedure for disentangled representation learning. In *The Thirteenth International Conference on Learning Representations*, 2025b.
- Tian Liang, Zhiwei He, Wenxiang Jiao, Xing Wang, Yan Wang, Rui Wang, Yujiu Yang, Shuming Shi, and Zhaopeng Tu. Encouraging divergent thinking in large language models through multi-agent debate. *arXiv preprint arXiv:2305.19118*, 2023.
- Zijun Liu, Yanzhe Zhang, Peng Li, Yang Liu, and Diyi Yang. A dynamic llm-powered agent network for task-oriented agent collaboration. In *First Conference on Language Modeling*, 2024.
- Gemma E Moran and Bryon Aragam. Towards interpretable deep generative models via causal representation learning. *arXiv preprint arXiv:2504.11609*, 2025.
- Gemma E Moran, Dhanya Sridhar, Yixin Wang, and David M Blei. Identifiable variational autoencoders via sparse decoding. *arXiv preprint arXiv:2110.10804*, 2021.
- Chau Pham, Boyi Liu, Yingxiang Yang, Zhengyu Chen, Tianyi Liu, Jianbo Yuan, Bryan A Plummer, Zhaoran Wang, and Hongxia Yang. Let models speak ciphers: Multiagent debate through embeddings. *arXiv preprint arXiv:2310.06272*, 2023.
- Andrea Prat. Should a team be homogeneous? *European Economic Review*, 46(7):1187–1207, 2002.
- Olav Reiersøl. Identifiability of a linear relation between variables which are subject to error. *Econometrica: Journal of the Econometric Society*, pages 375–389, 1950.
- Nils Reimers and Iryna Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, 2019.
- Xiangchen Song, Zijian Li, Guangyi Chen, Yujia Zheng, Yewen Fan, Xinshuai Dong, and Kun Zhang. Causal temporal representation learning with nonstationary sparse transition. *Advances in Neural Information Processing Systems*, 37:77098–77131, 2024.
- Vighnesh Subramaniam, Yilun Du, Joshua B Tenenbaum, Antonio Torralba, Shuang Li, and Igor Mordatch. Multiagent finetuning: Self improvement with diverse reasoning chains. *arXiv preprint arXiv:2501.05707*, 2025.
- Anisse Taleb and Christian Jutten. Source separation in post-nonlinear mixtures. *IEEE Transactions on signal Processing*, 47(10):2807–2820, 1999.
- Khanh-Tung Tran, Dung Dao, Minh-Duong Nguyen, Quoc-Viet Pham, Barry O’Sullivan, and Hoang D Nguyen. Multi-agent collaboration mechanisms: A survey of llms. *arXiv preprint arXiv:2501.06322*, 2025.
- Vernor Vinge. The coming technological singularity: How to survive in the post-human era. *Science fiction criticism: An anthology of essential writings*, 81:352–363, 1993.
- Wilhelm von Humboldt. *On Language: The Diversity of Human Language-Structure and its Influence on the Mental Development of Mankind*. Cambridge University Press, 1988.
- Julius von Kügelgen, Yash Sharma, Luigi Gresele, Wieland Brendel, Bernhard Schölkopf, Michel Besserve, and Francesco Locatello. Self-supervised learning with data augmentations provably isolates content from style. *arXiv preprint arXiv:2106.04619*, 2021.
- Julius von Kügelgen, Michel Besserve, Liang Wendong, Luigi Gresele, Armin Kekić, Elias Bareinboim, David Blei, and Bernhard Schölkopf. Nonparametric identifiability of causal representations from unknown interventions. *Advances in Neural Information Processing Systems*, 36:48603–48638, 2023.

- Kuan Wang, Yadong Lu, Michael Santacrose, Yeyun Gong, Chao Zhang, and Yelong Shen. Adapting llm agents with universal feedback in communication. *arXiv preprint arXiv:2310.01444*, 2023.
- Zhao Wang, Sota Moriyama, Wei-Yao Wang, Briti Gangopadhyay, and Shingo Takamatsu. Talk structurally, act hierarchically: A collaborative framework for llm multi-agent systems. *arXiv preprint arXiv:2502.11098*, 2025a.
- Zhexuan Wang, Yutong Wang, Xuebo Liu, Liang Ding, Miao Zhang, Jie Liu, and Min Zhang. Agentdropout: Dynamic agent elimination for token-efficient and high-performance llm-based multi-agent collaboration. *arXiv preprint arXiv:2503.18891*, 2025b.
- Zora Zhiruo Wang, Jiayuan Mao, Daniel Fried, and Graham Neubig. Agent workflow memory. *arXiv preprint arXiv:2409.07429*, 2024.
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, et al. Autogen: Enabling next-gen llm applications via multi-agent conversation. *arXiv preprint arXiv:2308.08155*, 2023.
- Yiran Wu, Tianwei Yue, Shaokun Zhang, Chi Wang, and Qingyun Wu. Stateflow: Enhancing llm task-solving through state-driven workflows. In *First Conference on Language Modeling*, 2024.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Weiran Yao, Yuewen Sun, Alex Ho, Changyin Sun, and Kun Zhang. Learning temporally causal latent processes from general temporal data. *arXiv preprint arXiv:2110.05428*, 2021.
- Luke Yoffe, Alfonso Amayuelas, and William Yang Wang. Debunc: Improving large language model agent communication via uncertainty metrics. *arXiv preprint arXiv:2407.06426*, 2024.
- Yuting Zeng, Weizhe Huang, Lei Jiang, Tongxuan Liu, Xitai Jin, Chen Tianying Tiana, Jing Li, and Xiaohua Xu. S<sup>2</sup>-mad: Breaking the token barrier to enhance multi-agent debate efficiency. *arXiv preprint arXiv:2502.04790*, 2025.
- Guibin Zhang, Yanwei Yue, Zhixun Li, Sukwon Yun, Guancheng Wan, Kun Wang, Dawei Cheng, Jeffrey Xu Yu, and Tianlong Chen. Cut the crap: An economical communication pipeline for llm-based multi-agent systems. *arXiv preprint arXiv:2410.02506*, 2024a.
- Guibin Zhang, Yanwei Yue, Xiangguo Sun, Guancheng Wan, Miao Yu, Junfeng Fang, Kun Wang, Tianlong Chen, and Dawei Cheng. G-designer: Architecting multi-agent communication topologies via graph neural networks. *arXiv preprint arXiv:2410.11782*, 2024b.
- Kun Zhang, Shaoan Xie, Ignavier Ng, and Yujia Zheng. Causal representation learning from multiple distributions: A general setting. In *Forty-first International Conference on Machine Learning*, 2024c.
- Yujia Zheng and Kun Zhang. Generalizing nonlinear ICA beyond structural sparsity. *Advances in Neural Information Processing Systems*, 36:13326–13355, 2023.
- Yujia Zheng, Ignavier Ng, and Kun Zhang. On the identifiability of nonlinear ICA: Sparsity and beyond. In *Advances in Neural Information Processing Systems*, 2022.
- Yujia Zheng, Yang Liu, Jiaxiong Yao, Yingyao Hu, and Kun Zhang. Nonparametric factor analysis and beyond. In *International Conference on Artificial Intelligence and Statistics*, pages 424–432. PMLR, 2025.

# Appendix:

## *Thought Communication in Multiagent Collaboration*

### Table of Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>A Proofs</b>                                               | <b>15</b> |
| A.1 Proof of Theorem 1 . . . . .                              | 15        |
| A.2 Proof of Theorem 2 . . . . .                              | 17        |
| A.3 Proof of Theorem 3 . . . . .                              | 19        |
| <b>B Supplementary Discussion</b>                             | <b>20</b> |
| <b>C Experimental Details and Additional Results</b>          | <b>21</b> |
| C.1 Implementation Details . . . . .                          | 21        |
| C.2 Additional Results on Scaling Debate Rounds . . . . .     | 21        |
| C.3 Additional Results on Varying Latent Dimensions . . . . . | 22        |
| C.4 Additional Results on Varying Number of Agents . . . . .  | 22        |

## A Proofs

### A.1 Proof of Theorem 1

**Theorem 1** (Identifying the shared thoughts). *Suppose that for each  $i \in [n_x]$ , there exist points where the Jacobians  $J_f(Z_t)_{i,\cdot}$  span the support subspace  $S_{J_f(Z_t)}_{i,\cdot}$ , and that  $(J_f(Z_t)\mathcal{M})_{i,\cdot} \in S_{J_f(Z_t)}_{i,\cdot}$  at those points. If  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  for a model  $(\hat{f}, \hat{Z}_t)$  following §2 with  $\ell_0$  regularization on  $J_{\hat{f}}$ , then for any pair of agents  $A_i$  and  $A_j$  at round  $t$ , there exists a permutation  $\pi$  over  $[n_z]$  such that  $\frac{\partial Z_i}{\partial \hat{Z}_{\pi(j)}} = 0$  for any  $Z_i \in Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}}$  and any  $Z_j \in (Z_{H_t^{(i)}} \cup Z_{H_t^{(j)}}) \setminus (Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}})$ .*

*Proof.* Because  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  and  $H_t \stackrel{d}{=} f(Z_t)$ , we have

$$p(\hat{f}(\hat{Z}_t)) = p(f(Z_t)). \quad (13)$$

According to the change-of-variable formula, there exists  $h = \hat{f}^{-1} \circ f: Z_t \rightarrow \hat{Z}_t$  s.t.  $\hat{Z}_t = h(Z_t)$ . Taking the derivatives of both sides w.r.t.  $Z_t$  yields

$$J_f(Z_t) = J_{\hat{f}}(\hat{Z}_t)J_h(Z_t), \quad (14)$$

which is equivalent to

$$J_{\hat{f}}(\hat{Z}_t) = J_f(Z_t)J_h^{-1}(Z_t). \quad (15)$$

The inverse Jacobian  $J_h^{-1}(Z_t)$  exists since both  $f$  and  $\hat{f}$  are invertible, implying that  $h = \hat{f}^{-1} \circ f$  is itself invertible.

Since for each  $i \in [n_z]$ , there exist points where the Jacobian  $J_f(Z_t)_{i,\cdot}$  spans its support subspace  $(S_{J_f})_{i,\cdot}$ , we can express any vector in that subspace with a linear combination of these vectors. Therefore, for any  $j \in [n_z]$  where  $B(J_f)_{i,j} \neq 0$ , we have

$$M_{j,\cdot} = e_j M, \quad (16)$$

where  $M$  is a constant matrix with the same nonzero pattern as  $J_h^{-1}(Z_t)$ , and we construct a one-hot vector  $e_j \in S_{J_f(Z_t)}_{i,\cdot}$  with  $\alpha_k$  as coefficients of that linear combination:

$$e_j := \sum_{k \in B_i} \alpha_k (J_f(z^{(k)}))_{i,\cdot}, \quad (17)$$

where  $B_i$  denotes the set of points spanning the subspace. Thus we have

$$M_{j,\cdot} = \sum_{k \in B_i} \alpha_k (J_f(z^{(k)}))_{i,\cdot} M. \quad (18)$$

According to the assumption, we have

$$(J_f(z^{(k)}))_{i,\cdot} M = (J_f(Z_t)M)_{i,\cdot} \in \mathcal{S}_{J_{f,i,\cdot}}. \quad (19)$$

Therefore, for any  $j \in [n_z]$  where  $B(J_f)_{i,j} \neq 0$  there is

$$M_{j,\cdot} \in \mathcal{S}_{J_{f,i,\cdot}}. \quad (20)$$

Construct a bipartite graph

$$G = (R, C, E), \quad R = C = [n_z], \quad (j, k) \in E \iff M_{j,k} \neq 0.$$

Since  $M$  is invertible, its rows are linearly independent, giving

$$|N(S)| \geq |S| \quad \forall S \subseteq R, \quad (21)$$

where  $N(S)$  is the neighborhood of  $S$ . Hall's marriage theorem then yields a permutation  $\pi \in S_{n_z}$  with

$$J_h^{-1}(Z_t)_{j,\pi(j)} \neq 0, \quad \forall j \in [n_z]. \quad (22)$$

According to Eq. (20), this further implies that, for any  $j \in [n_z]$  where  $B(J_f)_{i,j} \neq 0$ , there is

$$(i, \pi(j)) \in i \times M_{j,\cdot} \subset \mathcal{S}_{J_{f,i,\cdot}} \quad (23)$$

Hence

$$(J_f(Z_t))_{i,j} \neq 0 \implies (J_{\hat{f}}(\hat{Z}_t))_{i,\pi(j)} \neq 0. \quad (24)$$

Given additionally the  $\ell_0$  regularization on  $J_{\hat{f}}$ :

$$\|(J_{\hat{f}})_{i,\cdot}\|_0 \leq \|(J_f)_{i,\cdot}\|_0, \quad \forall i \in [n_z]. \quad (25)$$

Together with (24), this gives the equivalence

$$(J_f(Z_t))_{i,j} \neq 0 \iff (J_{\hat{f}}(\hat{Z}_t))_{i,\pi(j)} \neq 0, \quad \forall i, j \in [n_z], \quad (26)$$

For any  $Z_i \in Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}}$  and any  $Z_j \in (Z_{H_t^{(i)}} \cup Z_{H_t^{(j)}}) \setminus (Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}})$ , there is

$$B(J_f)_{H_t^{(i)},i} \neq 0. \quad (27)$$

Based on Eq. (20), there is

$$M_{i,\cdot} \in \mathcal{S}_{J_{\hat{f},H_t^{(i)},\cdot}}, \quad (28)$$

where we use  $\mathcal{S}_{J_{\hat{f},H_t^{(i)},\cdot}}$  to index multiple rows corresponding to  $H_t^{(i)}$  at once. This is for notational brevity and will also be applied later. We also have

$$B(J_f)_{H_t^{(j)},i} \neq 0, \quad (29)$$

where we slightly abuse the notation to indicate that not all entries at the specified indices are zero. This convention is adopted throughout, though we only make it explicit here.

Similarly, there is also

$$M_{i,\cdot} \in \mathcal{S}_{J_{\hat{f},H_t^{(j)},\cdot}}. \quad (30)$$

Suppose for contradiction that, for any  $Z_j \in (Z_{H_t^{(i)}} \cup Z_{H_t^{(j)}}) \setminus (Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}})$ , there is

$$M_{i,\pi(j)} \neq 0. \quad (31)$$

Then, according to Eq. (28), there is

$$B(J_{\hat{f}})_{H_t^{(i)},\pi(j)} \neq 0. \quad (32)$$

This implies the follows according to Eq. (26):

$$B(J_f)_{H_t^{(i)},j} \neq 0. \quad (33)$$

Similarly, according to Eq. (30), there is

$$B(J_{\hat{f}})_{H_t^{(j)},\pi(j)} \neq 0. \quad (34)$$

This implies the follows according to Eq. (26):

$$B(J_f)_{H_t^{(j)},j} \neq 0. \quad (35)$$

Thus, there must be

$$Z_j \in Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}}, \quad (36)$$

which contradicts

$$Z_j \in (Z_{H_t^{(i)}} \cup Z_{H_t^{(j)}}) \setminus (Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}}). \quad (37)$$

Therefore, there must be

$$M_{i,\pi(j)} = 0, \quad (38)$$

which implies  $\frac{\partial Z_i}{\partial \hat{Z}_{\pi(j)}} = 0$ .  $\square$

## A.2 Proof of Theorem 2

**Theorem 2** (Identifying the private thoughts). *Suppose the assumption in Thm. 1 holds. If  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  for a model  $(\hat{f}, \hat{Z}_t)$  following §2 with  $\ell_0$  regularization on  $J_{\hat{f}}$ , then for any pair of agents  $A_i$  and  $A_j$  at round  $t$ , there exists a permutation  $\pi$  over  $[n_z]$  such that  $\frac{\partial Z_i}{\partial \hat{Z}_{\pi(j)}} = 0$  for any  $Z_i \in Z_{H_t^{(i)}} \setminus Z_{H_t^{(j)}}$  and any  $Z_j \in Z_{H_t^{(j)}}$ .*

*Proof.* Part of the derivations has been provided in proofs of Theorem 1, and we include it for completeness. Because  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  and  $H_t \stackrel{d}{=} f(Z_t)$ , we have

$$p(\hat{f}(\hat{Z}_t)) = p(f(Z_t)). \quad (39)$$

According to the change-of-variable formula, there exists  $h = \hat{f}^{-1} \circ f: Z_t \rightarrow \hat{Z}_t$  s.t.  $\hat{Z}_t = h(Z_t)$ . Taking the derivatives of both sides w.r.t.  $Z_t$  yields

$$J_f(Z_t) = J_{\hat{f}}(\hat{Z}_t)J_h(Z_t), \quad (40)$$

which is equivalent to

$$J_{\hat{f}}(\hat{Z}_t) = J_f(Z_t)J_h^{-1}(Z_t). \quad (41)$$

The inverse Jacobian  $J_h^{-1}(Z_t)$  exists since both  $f$  and  $\hat{f}$  are invertible, implying that  $h = \hat{f}^{-1} \circ f$  is itself invertible.

Since for each  $i \in [n_z]$ , there exist points where the Jacobian  $J_f(Z_t)_{i,\cdot}$  spans its support subspace  $(\mathcal{S}_{J_f})_{i,\cdot}$ , we can express any vector in that subspace with a linear combination of these vectors. Therefore, for any  $j \in B(J_f)_{i,\cdot}$ , we have

$$M_{j,\cdot} = e_j M, \quad (42)$$

where  $M$  is a constant matrix with the same nonzero pattern as  $J_h^{-1}(Z_t)$ , and we construct a one-hot vector  $e_j \in \mathcal{S}_{J_f}{}_{i,\cdot}$  with  $\alpha_k$  as coefficients of that linear combination:

$$e_j := \sum_{k \in B_i} \alpha_k (J_f(z^{(k)}))_{i,\cdot}, \quad (43)$$

where  $B_i$  denotes the set of points spanning the subspace. Thus we have

$$M_{j,\cdot} = \sum_{k \in B_i} \alpha_k (J_f(z^{(k)}))_{i,\cdot} M. \quad (44)$$

According to the assumption, we have

$$(J_f(z^{(k)}))_{i,\cdot} M = (J_f(Z_t)M)_{i,\cdot} \in \mathcal{S}_{J_{f_{i,\cdot}}}. \quad (45)$$

Therefore, for any  $j \in B(J_f)_{i,\cdot}$ , there is

$$M_{j,\cdot} \in \mathcal{S}_{J_{f_{i,\cdot}}}. \quad (46)$$

Construct a bipartite graph

$$G = (R, C, E), \quad R = C = [n_z], \quad (j, k) \in E \iff M_{j,k} \neq 0.$$

Since  $M$  is invertible, its rows are linearly independent, giving

$$|N(S)| \geq |S| \quad \forall S \subseteq R, \quad (47)$$

where  $N(S)$  is the neighborhood of  $S$ . Hall's marriage theorem then yields a permutation  $\pi \in S_{n_z}$  with

$$J_h^{-1}(Z_t)_{j,\pi(j)} \neq 0, \quad \forall j \in [n_z]. \quad (48)$$

According to Eq. (46), this further implies that, for any  $j \in [n_z]$  where  $B(J_f)_{i,j} \neq 0$ , there is

$$(i, \pi(j)) \in i \times M_{j,\cdot} \subset S_{J_f} \quad (49)$$

Hence

$$(J_f)_{i,j} \neq 0 \implies (J_f)_{i,\pi(j)} \neq 0. \quad (50)$$

Given additionally the  $\ell_0$  regularization on  $J_{\hat{f}}$ :

$$\|(J_{\hat{f}})_{i,\cdot}\|_0 \leq \|(J_f)_{i,\cdot}\|_0, \quad \forall i \in [n_z]. \quad (51)$$

Together with Eq. (50), this gives the equivalence

$$(J_f(Z_t))_{i,j} \neq 0 \iff (J_{\hat{f}}(\hat{Z}_t))_{i,\pi(j)} \neq 0, \quad \forall i, j \in [n_z], \quad (52)$$

Consider the case where  $Z_{i'} \in Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}}$  and  $Z_{j'} \in Z_t \setminus (Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}})$ . Based on Eq. (46), there is

$$M_{i',\cdot} \in \mathcal{S}_{J_{\hat{f}_{H_t^{(i)},\cdot}}}. \quad (53)$$

Suppose

$$M_{i',\pi(j')} \neq 0. \quad (54)$$

Then we have

$$B(J_{\hat{f}})_{H_t^{(i)},\pi(j')} \neq 0, \quad (55)$$

which implies

$$B(J_f)_{H_t^{(i)},j'} \neq 0. \quad (56)$$

At the same time, since  $Z_{i'} \in Z_{H_t^{(j)}}$ , there is

$$M_{i',\cdot} \in \mathcal{S}_{J_{\hat{f}_{H_t^{(j)},\cdot}}}. \quad (57)$$

Since we suppose  $M_{i',\pi(j')} \neq 0$ , it follows that

$$B(J_{\hat{f}})_{H_t^{(j)},\pi(j')} \neq 0, \quad (58)$$

which implies

$$B(J_f)_{H_t^{(j)},j'} \neq 0. \quad (59)$$

Clearly, Eqs. (56) and (59) together contradict  $Z_{j'} \in Z_t \setminus (Z_{H_t^{(i)}} \cap Z_{H_t^{(j)}})$ . Thus, there must be

$$M_{i',\pi(j')} = 0. \quad (60)$$

For any  $Z_i \in Z_{H_t^{(i)}} \setminus Z_{H_t^{(j)}}$  and any  $Z_j \in Z_{H_t^{(j)}}$ , we first consider  $Z_j \in Z_{H_t^{(j)}} \cap Z_{H_t^{(i)}}$ . Since  $Z_{H_t^{(j)}} \cap Z_{H_t^{(i)}}$  does not intersect with  $Z_{H_t^{(i)}} \setminus Z_{H_t^{(j)}}$ ,  $Z_j$  is not a function of  $Z_i$ . According to the

invertibility and Eq. (60),  $Z_{H_t^{(j)}} \cap Z_{H_t^{(i)}}$  can only be an invertible function of  $\sigma(\hat{Z}_{H_t^{(j)}} \cap \hat{Z}_{H_t^{(i)}})$ , where  $\sigma$  denotes the permutation function corresponding to the permutation  $\pi$ . Further given that  $Z_j$  is not a function of  $Z_i$  and  $Z_i \in Z_{H_t^{(i)}} \setminus Z_{H_t^{(j)}}$ ,  $Z_j$  is also not a function of any variable in  $\sigma(\hat{Z}_{H_t^{(j)}} \cap \hat{Z}_{H_t^{(i)}})$ , i.e.,

$$M_{i,\pi(j)} = 0. \quad (61)$$

We then consider the other case where  $Z_j \in Z_{H_t^{(j)}} \setminus Z_{H_t^{(i)}}$ . There is

$$B(J_f)_{H_t^{(i)},i} \neq 0. \quad (62)$$

It implies that

$$M_{i,\cdot} \in \mathcal{S}_{J_{\hat{f}} H_t^{(i)},\cdot}. \quad (63)$$

For  $Z_j \in Z_{H_t^{(j)}} \setminus Z_{H_t^{(i)}}$ , suppose

$$M_{i,\pi(j)} \neq 0. \quad (64)$$

Then there is

$$B(J_{\hat{f}})_{H_t^{(i)},\pi(j)} \neq 0. \quad (65)$$

Which is equivalent to

$$B(J_f)_{H_t^{(i)},j} \neq 0. \quad (66)$$

This is a contradiction since  $Z_j \in Z_{H_t^{(j)}} \setminus Z_{H_t^{(i)}}$ .

Therefore, we have

$$M_{i,\pi(j)} = 0. \quad (67)$$

Considering both cases, we prove that  $\frac{\partial Z_i}{\partial \hat{Z}_{\pi(j)}} = 0$  for any  $Z_i \in Z_{H_t^{(i)}} \setminus Z_{H_t^{(j)}}$  and any  $Z_j \in Z_{H_t^{(j)}}$ .  $\square$

### A.3 Proof of Theorem 3

**Theorem 3** (Identifying the structure of thoughts). *Suppose the assumption in Thm. 1 holds. If  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  for a model  $(\hat{f}, \hat{Z}_t)$  following §2 with  $\ell_0$  regularization on  $J_{\hat{f}}$ , then the nonzero pattern  $B(J_f)$  is identifiable up to relabelling, i.e.,  $B(J_{\hat{f}}) = B(J_f)P$  for a permutation matrix  $P$ .*

*Proof.* Part of the derivations has been provided in proofs of Theorems 1 and 2, and we include it for completeness. Because  $H_t \stackrel{d}{=} \hat{f}(\hat{Z}_t)$  and  $H_t \stackrel{d}{=} f(Z_t)$ , we have

$$p(\hat{f}(\hat{Z}_t)) = p(f(Z_t)). \quad (68)$$

According to the change-of-variable formula, there exists  $h = \hat{f}^{-1} \circ f: Z_t \rightarrow \hat{Z}_t$  s.t.  $\hat{Z}_t = h(Z_t)$ . Taking the derivatives of both sides w.r.t.  $Z_t$  yields

$$J_f(Z_t) = J_{\hat{f}}(\hat{Z}_t)J_h(Z_t), \quad (69)$$

which is equivalent to

$$J_{\hat{f}}(\hat{Z}_t) = J_f(Z_t)J_h^{-1}(Z_t). \quad (70)$$

The inverse Jacobian  $J_h^{-1}(Z_t)$  exists since both  $f$  and  $\hat{f}$  are invertible, implying that  $h = \hat{f}^{-1} \circ f$  is itself invertible.

Since for each  $i \in [n_z]$ , there exist points where the Jacobian  $J_f(Z_t)_{i,\cdot}$  spans its support subspace  $(\mathcal{S}_{J_f})_{i,\cdot}$ , we can express any vector in that subspace with a linear combination of these vectors. Therefore, for any  $j \in B(J_f)_{i,\cdot}$ , we have

$$M_{j,\cdot} = e_j M, \quad (71)$$

where  $M$  is a constant matrix with the same nonzero pattern as  $J_h^{-1}(Z_t)$ , and we construct a one-hot vector  $e_j \in \mathcal{S}_{J_f}{}_{i,\cdot}$  with  $\alpha_k$  as coefficients of that linear combination:

$$e_j := \sum_{k \in B_i} \alpha_k (J_f(z^{(k)}))_{i,\cdot}. \quad (72)$$

Thus we have

$$M_{j,\cdot} = \sum_{k \in B_i} \alpha_k (J_f(z^{(k)}))_{i,\cdot} M. \quad (73)$$

According to the assumption, we have

$$(J_f(z^{(k)}))_{i,\cdot} M = (J_f(Z_t)M)_{i,\cdot} \in \mathcal{S}_{J_{f,i,\cdot}}. \quad (74)$$

Therefore, for any  $j \in B(J_f)_{i,\cdot}$ , there is

$$M_{j,\cdot} \in \mathcal{S}_{J_{f,i,\cdot}}. \quad (75)$$

Construct a bipartite graph

$$G = (R, C, E), \quad R = C = [n_z], \quad (j, k) \in E \iff M_{j,k} \neq 0.$$

Since  $M$  is invertible, its rows are linearly independent, giving

$$|N(S)| \geq |S| \quad \forall S \subseteq R,$$

where  $N(S)$  is the neighborhood of  $S$ . Hall's marriage theorem then yields a permutation  $\pi \in S_{n_z}$  with

$$J_h^{-1}(Z_t)_{j,\pi(j)} \neq 0, \quad \forall j \in [n_z]. \quad (76)$$

According to Eq. (75), this further implies that, for any  $j \in [n_z]$  where  $B(J_f)_{i,j} \neq 0$ , there is

$$(i, \pi(j)) \in i \times M_{j,\cdot} \subset \mathcal{S}_{J_{f,i,\cdot}} \quad (77)$$

Hence

$$(J_f)_{i,j} \neq 0 \implies (J_{\hat{f}})_{i,\pi(j)} \neq 0. \quad (78)$$

Given additionally the  $\ell_0$  regularization on  $J_{\hat{f}}$ :

$$\|(J_{\hat{f}})_{i,\cdot}\|_0 \leq \|(J_f)_{i,\cdot}\|_0, \quad \forall i \in [n_z]. \quad (79)$$

Together with (78), this gives the equivalence

$$(J_f(Z_t))_{i,j} \neq 0 \iff (J_{\hat{f}}(\hat{Z}_t))_{i,\pi(j)} \neq 0, \quad \forall i, j \in [n_z]. \quad (80)$$

This implies the equation that

$$B(J_{\hat{f}}) = B(J_f)P, \quad (81)$$

where  $P$  is a permutation matrix.  $\square$

## B Supplementary Discussion

**Alternative to model states.** Our main framework assumes access to the model states  $H_t$  of each agent before communication. These states provide a rich representation of the agent's processing of context and are used as inputs to our autoencoder for recovering latent thoughts. However, such internal states may be inaccessible in many practical settings, particularly when using closed-source or API-restricted models.

In these cases, a viable alternative is to replace the model state  $H_t^{(i)}$  of each agent with a compact embedding extracted from its textual response. Specifically, one can apply a context-aware embedding model to summarize the agent's generated text into a fixed-size vector, which is then treated as a proxy for the unavailable model state.

Crucially, this embedding does not need to preserve any structure among agents, nor does it need to reflect the agent's intent. Its only requirement is to provide a compressed summary of the textual content at the linguistic level. Examples of such embedding methods include those from models like BERT or RoBERTa, pooled sentence embeddings from Sentence-BERT [Reimers and Gurevych, 2019], or output vectors from instruction-tuned embedding APIs. These methods are designed to produce compact, semantically meaningful vectors that summarize the surface content of a given text.

Once such an embedding is obtained for each agent, the rest of the framework remains unchanged. The collection of response embeddings is treated as a surrogate for  $H_t$  and passed through the sparsity-regularized autoencoder to recover latent thoughts  $\hat{Z}_t$ . From that point on, latent communication

proceeds identically: inferring shared/private thoughts, routing them based on recovered structure, and injecting them into agents via prefix adaptation.

This replacement provides a drop-in mechanism to support latent communication in scenarios where model internals are inaccessible, enabling broader applicability of the framework across both open- and closed-source agents. Naturally, one may choose suitable encoders for other modalities to extend the framework beyond LLMs.

## C Experimental Details and Additional Results

### C.1 Implementation Details

For experiments conducted in §5, we set the prefix token count for our method to 1. For baseline comparisons, we utilize the original code released by the authors<sup>†</sup>. All experiments are conducted on a single compute node with 8 NVIDIA H100 GPUs.

### C.2 Additional Results on Scaling Debate Rounds

In §5.3, we compare the performance of Multiagent Finetune [Subramaniam et al., 2025] and THOUGHTCOMM as the number of debate rounds increases from 2 to 6 based on Llama-3-8B-Instruct [Grattafiori et al., 2024]. Here, we further extend the analysis to an additional model, Qwen-3-1.7B [Yang et al., 2025], demonstrating that THOUGHTCOMM remains robust and is not adversely affected by increased redundancy caused by increased numbers of debate rounds.

As shown in Fig. 7, we observe that the accuracy and consensus of THOUGHTCOMM remain stable or even improve as the number of debate rounds increases up to 6. In contrast, the performance of Multiagent Finetune [Subramaniam et al., 2025] declines noticeably as rounds increase beyond 4, particularly in the accuracy metric. This further supports our claim that THOUGHTCOMM is robust to the accumulation of redundant or noisy information introduced by additional communication rounds.

It is important to note, however, that high consensus among agents does not always imply high task accuracy. This phenomenon is particularly evident in the Qwen-3-1.7B [Yang et al., 2025] results for Multiagent Finetune [Subramaniam et al., 2025], where consensus steadily increases as the number of debate rounds grows—from 2 to 6, while the corresponding accuracy remains stagnant or even degrades. This decoupling suggests that agents can converge on a common answer even when that answer is incorrect, leading to a failure mode in which additional communication drives premature agreement rather than genuine reasoning improvements.

In contrast, THOUGHTCOMM not only increases consensus but also aligns higher agreement with improved accuracy. We also highlight that the gap between THOUGHTCOMM and the baseline widens at higher round counts. These results underscore the importance of structure-aware latent communication in preventing unproductive conformity and fostering truly collaborative reasoning in multi-agent LLM systems. Taken together, these findings confirm the scalability of our approach: THOUGHTCOMM enables multi-agent systems to leverage more communication rounds for improved reasoning without incurring the degradation commonly observed in prior debate-style frameworks.

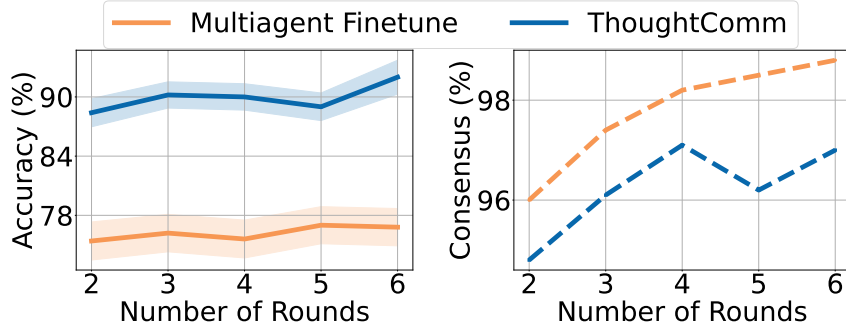


Figure 7: Additional results of multi-agent performance on Qwen-3-1.7B [Yang et al., 2025] as the number of debate rounds increases.

<sup>†</sup><https://github.com/vsubramaniam851/multiagent-ft/tree/main>

### C.3 Additional Results on Varying Latent Dimensions

We investigate how varying the latent dimensionality affects performance on the MATH dataset. In these experiments, the setup involves two agents, two rounds, and a single prefix token used for communication. Results are shown for both Llama-3-8B-Instruct and Qwen-3-1.7B models.

As shown in Fig. 8 and Fig. 9, accuracy consistently improves as the latent dimension increases up to 512, after which the gains saturate. This suggests that while higher-capacity latent spaces facilitate richer communication between agents, overly large latent dimensions yield diminishing returns, likely due to redundancy in the learned representations.

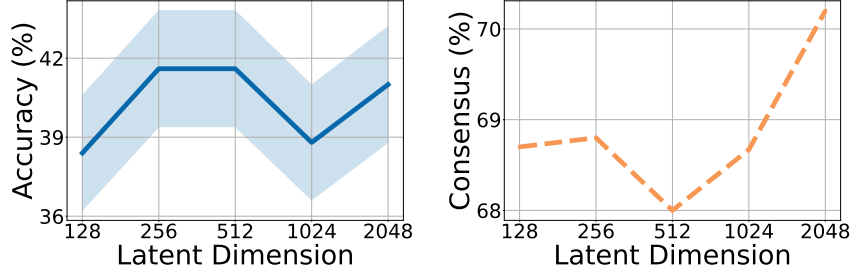


Figure 8: Effect of varying latent dimensionality on MATH for Llama-3-8B-Instruct [Grattafiori et al., 2024]. Accuracy improves with increased latent capacity, stabilizing beyond 1024 dimensions.

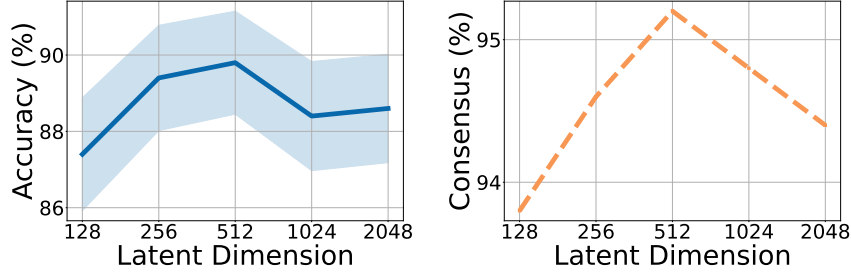


Figure 9: Effect of varying latent dimensionality on MATH for Qwen-3-1.7B [Yang et al., 2025]. A similar trend is observed, confirming that the benefits of higher latent capacity generalize across architectures.

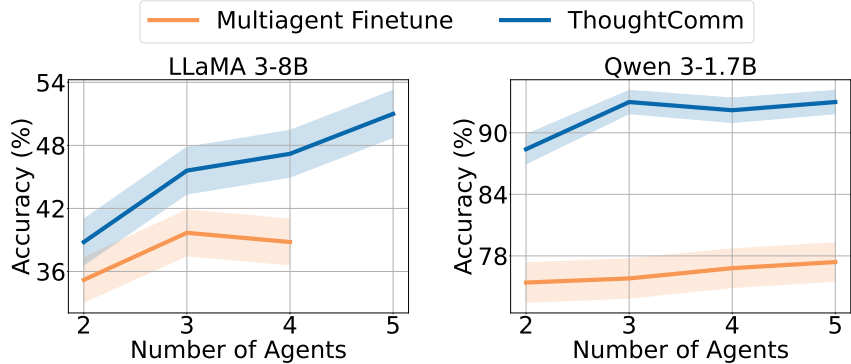


Figure 10: Performance as the number of agents increases on MATH for Llama-3-8B-Instruct and Qwen-3-1.7B. The missing data point is due to runtime limit exceeded.

### C.4 Additional Results on Varying Number of Agents

We next analyze how increasing the number of collaborating agents influences performance. All experiments are conducted with two rounds, latent dimension of 1024, and a single prefix token on the MATH dataset.

As shown in Fig. 10, both models initially benefit from more agents, achieving notable gains when increasing from 2 to 3. However, beyond 3 agents, accuracy plateaus or slightly declines, particularly for the Multiagent Finetune baseline. In contrast, THOUGHTCOMM maintains stable accuracy even as the number of agents grows, highlighting its robustness to redundant or conflicting signals.

## NeurIPS Paper Checklist

### 1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [\[Yes\]](#)

Justification: Major claims are described in abstract and emphasized in introduction.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

### 2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: The limitation is discussed explicitly.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

### 3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [\[Yes\]](#)

Justification: All theorems are supported with complete proofs with all assumption clearly stated.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

#### 4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [\[Yes\]](#)

Justification: A detailed description of the experimental setup is provided.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
  - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
  - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
  - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
  - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

#### 5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [No]

Justification: The model data used in our experiments are from publicly available datasets.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

## 6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyper-parameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: Detailed settings are provided.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

## 7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: The mean value of multiple runs and with std plotted with error bars.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.

- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

## 8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: Yes the computation resources use in the experiment is provided.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

## 9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: The authors have reviewed and conform the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

## 10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [NA]

Justification: The paper focuses on general machine learning problem, and we did not find it relevant to any specific societal topic.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.

- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

## 11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [NA]

Justification: The paper poses no such risks.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

## 12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: The assets are explicitly mentioned and credited.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, [paperswithcode.com/datasets](https://paperswithcode.com/datasets) has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.

- If this information is not available online, the authors are encouraged to reach out to the asset’s creators.

### 13. **New assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [\[Yes\]](#)

Justification: Detailed instructions have been provided.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

### 14. **Crowdsourcing and research with human subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [\[NA\]](#)

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

### 15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [\[NA\]](#)

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

### 16. **Declaration of LLM usage**

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [NA] .

Justification: The method development in this research does not involve LLMs as any important, original, or non-standard components.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.