

PALMBENCH: A COMPREHENSIVE BENCHMARK OF COMPRESSED LARGE LANGUAGE MODELS ON MOBILE PLATFORMS

Anonymous authors

Paper under double-blind review

ABSTRACT

Deploying large language models (LLMs) locally on mobile devices is advantageous in scenarios where transmitting data to remote cloud servers is either undesirable due to privacy concerns or impractical due to network connection. Recent advancements (MLC, 2023a; Gerganov, 2023) have facilitated the local deployment of LLMs. However, local deployment also presents challenges, particularly in balancing quality (generative performance), latency, and throughput within the hardware constraints of mobile devices. In this paper, we introduce our lightweight, *all-in-one automated benchmarking* framework that allows users to evaluate LLMs on mobile devices. We provide a comprehensive benchmark of various popular LLMs with different quantization configurations (both weights and activations) across multiple mobile platforms with varying hardware capabilities. Unlike traditional benchmarks that assess full-scale models on high-end GPU clusters, we focus on evaluating resource efficiency (memory and power consumption) and harmful output for compressed models on mobile devices. Our key observations include: **i**) differences in energy efficiency and throughput across mobile platforms; **ii**) the impact of quantization on memory usage, GPU execution time, and power consumption; and **iii**) accuracy and performance degradation of quantized models compared to their non-quantized counterparts; and **iv**) the frequency of hallucinations and toxic content generated by compressed LLMs on mobile devices.

1 INTRODUCTION

Large Language Models (LLMs) such as ChatGPT (OpenAI, 2023), Claude (Anthropic, 2023), and Llama (Touvron et al., 2023a;b;c; Llama, 2024) are powerful generative models that are revolutionizing interactive communication and various natural language processing tasks, including question-answering, document summarization, abstract reasoning, and code auto-completion (e.g., Github Copilot (Github)). LLMs require significant computational and memory resources due to their huge number of parameters (e.g., MT-NLG 530B (Smith et al., 2022)), making them more suitable for running on cloud infrastructures with high-end powerful GPU clusters. While significant attention has been dedicated to cloud-based LLMs, there is a growing need to run LLMs on resource-constrained mobile devices to obtain some key benefits. (1) *Privacy and Security*: Processing user data locally on mobile devices helps protect user privacy and enhances data security. There is also less risk of data breaches or unauthorized access to sensitive information. (2) *No Cloud Reliance*: By running LLMs locally, mobile applications can reduce their dependence on cloud services for language processing tasks. This can lead to cost savings and increased reliability, as the application’s functionality is not reliant on the availability and performance of remote servers (Hu et al., 2024). (3) *Offline Access*: By running LLMs on mobile devices, users can access powerful language processing capabilities even when they are not connected (or have unreliable connection) to the Internet.

The rapidly flourishing LLM ecosystem, including various large models, architectures and frameworks, presents both opportunities and challenges for developers and researchers interested in deploying pre-trained LLMs on mobile devices. Existing efforts in on-device LLM inference have primarily focused on model compression and efficient inference techniques, with a strong emphasis on deploying models on edge SoC (system-on-a-chip) with GPU and Linux systems (Lin et al., 2024; Gerganov, 2023; MLC, 2023a; Lu et al., 2024; Xu et al., 2024). These approaches aim to achieve a desired quality, latency, and throughput while operating within the constraints of the target

054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107

platform, *e.g.*, available memory and power limitations. However, the challenges and opportunities of efficiently deploying these large models on mobile platforms, such as smartphones or nano computers (*e.g.*, NVIDIA Jetson Orin Nano), remain largely unexplored.

Current LLM benchmarks primarily target the accuracy of large models on cloud clusters rather than mobile devices (Zheng et al., 2023). Some papers on mobile devices typically examines a limited range of models and platforms, often overlooking performance degradation and hallucination due to quantization (Çöplü et al., 2023; Laskaridis et al., 2024; Murthy et al., 2024).

To bridge this gap, we propose a comprehensive benchmarking framework to evaluate the overall user experience of LLMs on mobile devices. This framework automates the evaluation of various LLMs with different compiler options (*e.g.*, weight and activation quantization) across mobile platforms with diverse hardware capabilities (see Table 1). We systematically evaluate each LLM using a range of metrics across efficiency, accuracy (generative quality relative to non-quantized models), and harmful output dimensions. Our primary focus is on inference efficiency on mobile platforms, evaluating the computation usage (CPU and GPU), latency, throughput, energy consumption, and memory footprint of different models on different platforms (as shown in Figure 1). Along the accuracy dimension, we evaluate quantized models on mobile devices using mainstream datasets like Natural Questions (Kwiatkowski et al., 2019) and SQuAD (Rajpurkar et al., 2016), employing exact match and perfect match metrics to quantify performance degradation and ensure proper functionality for basic use cases. Also, we evaluate the harmful outputs including hallucination and toxicity of LLMs with existing benchmark datasets Li et al. (2023b); Lin et al. (2022); Luong et al. (2024).

Table 1: Summary of LLMs, mobile platforms, and quantization configurations explored by our benchmark.

LLMs	LLaMa-2 (Touvron et al., 2023b), LLaMa-3/3.1 (Dubey et al., 2024), RedPajama (Computer, 2023), LLaMa-3.2 (Llama, 2024), Vicuna (Chiang et al., 2023), TinyLlama (Zhang et al., 2024), Qwen2 (Bai et al., 2023), Mistral-7B (Jiang et al., 2023), Gemma (Team, 2024)
Mobile Platforms	Google Pixel 4 / Pixel 5a / Pixel 7, iPhone 15 Pro, iPhone 12 Pro, S22 Ultra, Orange Pi 5 (Pi), Nvidia Jetson Nano (Nano)
Quantization	2-bit (MLC, llama.cpp), 4-bit (MLC, llama.cpp), 5-bit (llama.cpp), 6-bit (llama.cpp), 8-bit (MLC, llama.cpp) (Frantar et al., 2022; Lin et al., 2024; Li et al., 2020; Dettmers & Zettlemoyer, 2023)

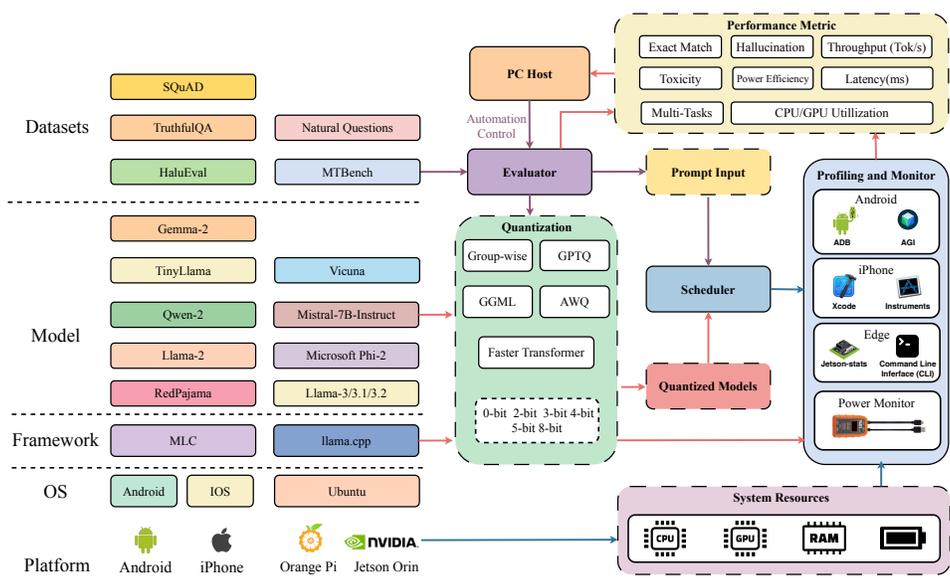


Figure 1: Overview and workflow of PalmBench – our evaluation and benchmarking framework for Large Language Models (LLMs) on mobile devices.

108 Unlike existing benchmarking efforts for LLM deployment on mobile devices, our study explores
109 and evaluates feasible pre-trained models with the most popular quantizations. We highlight various
110 combinations of LLM configurations suitable for mobile deployment (Zhang et al., 2024; Computer,
111 2023; Team, 2024; Llama, 2024; Abdin et al., 2024), along with several available quantization
112 options (Lin et al., 2024; Frantar et al., 2022; MLC, 2023a; Dettmers & Zettlemoyer, 2023).

113 We found that 4-bit quantization methods, such as group-wise (Yang et al., 2024), GPTQ (Frantar
114 et al., 2022), and AWQ (Lin et al., 2024), can generally preserve the performance of LLMs while
115 reducing their size to one-quarter of the original non-quantized model. This configuration diversity
116 can potentially lead developers (and users) to make sub-optimal choices in terms of performance
117 and efficiency. Our benchmarking analysis, focused on resource usage during inference, provides
118 insights into efficient deployment strategies tailored for mobile platforms. These strategies include
119 joint considerations of 1) model architecture, 2) quantization strategy, and 3) model size. In summary,
120 the major contributions of our paper are:

- 121 • To enable a comprehensive evaluation of various LLMs, we first develop a *lightweight, auto-*
122 *automated benchmarking framework* that collects performance metrics from mobile devices via USB,
123 eliminating the need for additional equipment.
- 124 • We evaluate various quantized LLMs on mobile platforms with different hardware capabilities,
125 measuring their resource utilization, power consumption, throughput, and inference latency.
- 126 • We validate the *knowledge and answering* accuracy of quantized models compared to their non-
127 quantized counterparts, and investigate the potential issues of compressed models such as toxicity,
128 bias, and the generation of erroneous or random outputs (hallucinations).
- 129 • Finally, our benchmarking leads to several key observations, highlighting the quantization dif-
130 ferences across models, platforms, and frameworks. We also observed that the iOS platform
131 outperforms others in power efficiency, latency, and throughput for LLM inference ¹.

133 2 RELATED WORK

134 Our benchmarking study extensively evaluated prior efforts focused on optimizing LLMs for mobile
135 devices. These efforts include frameworks (MLC, 2023a;b; Gerganov, 2023), the development of
136 smaller models (Computer, 2023; Abdin et al., 2024; Li et al., 2023c), and model quantization
137 techniques (Frantar et al., 2022).

138 **Large Language Models.** LLMs like ChatGPT (OpenAI, 2023), the Llama series (Touvron et al.,
139 2023a;c; Dubey et al., 2024; Llama, 2024), Mistral (Jiang et al., 2023), Vicuna (Chiang et al., 2023),
140 Gemma (Team, 2024) *etc.* are gaining substantial influence in generative AI applications. Their
141 resource requirements—both in terms of power consumption and memory usage—scale linearly
142 with model size, introducing significant operational overhead during inference. This challenge has
143 catalyzed research into efficient on-device LLM deployment (Xu et al., 2024; Lin et al., 2024; Zhu
144 et al., 2023; Lu et al., 2024), with particular emphasis on model compression and optimization. Recent
145 advances in compact model architectures have yielded promising alternatives, including Google’s
146 Gemma-2-2B (Team, 2024), Llama-3.2-1B/3B (Llama, 2024), RedPajama-INCITE-3B (Computer,
147 2023), Phi-2/Phi-3 (Abdin et al., 2024), and TinyLlama (Zhang et al., 2024).

148 **Quantization.** Post-training quantization (PTQ) compresses LLMs after full training, creating smaller
149 models optimized for inference. This method enables more efficient storage and faster computation.
150 Group-wise quantization (Yang et al., 2024) partitions neural network weights into groups, quantizing
151 each independently. This approach better aligns with weight distributions, reducing I/O costs and
152 improving performance on mobile platforms. GPTQ (Frantar et al., 2022) further enhances efficiency
153 by compressing LLM weights to 3 or 4 bits, compared to the standard 8-bit quantization. Activation-
154 aware Weight Quantization (AWQ) (Lin et al., 2024) identifies and preserves a subset of model
155 weights with larger activation magnitudes, known as salient weights, to minimize quantization loss.
156 Prior research (Dettmers & Zettlemoyer, 2023; Huang et al., 2024b; Lu et al., 2024; Xu et al., 2024)
157 has highlighted significant performance differences among quantization algorithms, showing that
158 RTN lags behind GPTQ and AWQ.

159 **Inference Engine.** While numerous efficient inference frameworks exist, MLC-LLM(MLC, 2023a;b)
160 stands out by enabling users to develop, quantize, and deploy LLMs across diverse platforms,
161

¹We plan to release the code of our framework to facilitate reproducibility and extensions of our research.

including mobile devices and web browsers. Llama.cpp (Gerganov, 2023), written in C++, offers a lightweight, portable alternative to Python-based frameworks. It supports multiple GPU kernels for high-speed processing and focuses on mixed quantization methods, particularly K-Quants. Both frameworks provide pre-compiled models while allowing users to perform custom quantization as needed.

Table 2: Metrics for evaluating the performance of LLMs on mobile devices. Memory usage includes both the model loaded to the memory and the framework program running on devices.

Metric	Definition
CPU Utilization (%)	Percentage of the total processor cycles consumed by LLM
GPU Utilization (%)	Percentage of the total GPU computing resource during LLM inference
Memory Footprint (GB)	Measurement of main memory used by the LLM application
Memory Utilization (%)	Percentage of main memory used by the LLM application
Throughput (Tok / s)	Number of output tokens per second generated by the LLM
Output Matching	Accuracy degradation of the compressed model relative to the original model
Toxicity	Toxicity score calculated on 25k sentences by Perspective API
Hallucination (%)	Percentage of erroneous or random outputs not related to the questions

Benchmark. Most existing benchmark frameworks of LLMs focus on maximizing performance across different model architectures and evaluating a model’s general world knowledge, question-answering, and reasoning ability (Zheng et al., 2023; Hendrycks et al., 2021; Rajpurkar et al., 2016; Kwiatkowski et al., 2019). Some existing studies on evaluating LLMs for mobile deployment are limited in scope (Murthy et al., 2024; Çöplü et al., 2023; Laskaridis et al., 2024) or evaluating online models instead of on-device inference (Lee et al., 2024). They fail to comprehensively examine resource efficiency and power consumption, which are crucial for mobile deployment. Recent efforts to benchmark edge LLMs include the Starting-kit competition framework (Huang et al., 2024a), built on MLC (MLC, 2023a;b), which facilitates LLM evaluation on Linux-based edge devices.

MELT (Laskaridis et al., 2024) evaluates five LLMs across devices, measuring throughput, power, and Q&A accuracy, but lacks comprehensive analysis of resource utilization, energy efficiency across quantization methods, and layer-wise GPU profiling. Similarly, MobileAIBench (Murthy et al., 2024) offers comprehensive benchmarks for quantized LLMs and LMMs, with a focus on NLP tasks and resource utilization, but its scope is limited to iOS devices and lacks both automated testing capabilities and cross-platform evaluation support. Furthermore, all these existing benchmark works ignore the toxicity, bias, and generation of erroneous or randomized outputs (which always occur in quantized models)—factors that significantly impact user experience across different frameworks.

3 METHODOLOGY

To evaluate the LLMs on mobile devices, we created the PaImBench framework, which focuses on the following three aspects:

1) Benchmark Automation. We designed an automated framework comprising an **Evaluator**, **Scheduler** and **Profiling and Monitor** modules, designed to handle experimental prompt datasets, evaluate quantized models, and schedule profiling across various metrics. The framework’s workflow is illustrated in Fig. 1.

2) Resource Utilization. Our primary focus is on the resource demands of different models across various platforms—such as CPU, GPU, and memory that significantly impact user experience. Our study goes beyond resource demands, aiming to quantify the impact of different quantization techniques on both performance and resource efficiency across various state-of-the-art models.

3) Model Accuracy. While a model’s architecture primarily determines its output, we observe variations across devices when different quantization methods are applied. To validate quantized LLMs and assess accuracy degradation caused by compression, we evaluate models using *Exact Match* and *F1 score*, comparing their *knowledge and answering* accuracy against original models. Additionally, we test these models on standard tasks with open-source datasets such as SQuAD and Natural Questions (Rajpurkar et al., 2016; Kwiatkowski et al., 2019). Moreover, we also investigate

216 the potential issues of toxicity and the generation of erroneous or randomized outputs that always
217 occur in compressed models and have not been thoroughly studied in previous work (Laskaridis et al.,
218 2024).

219 3.1 METRICS AND DATASETS

220 Table 2 summarizes all the metrics used in our benchmark. To evaluate the accuracy and correctness
221 of quantized LLMs, we use popular *Question-Answering* datasets such as SQuAD (Rajpurkar et al.,
222 2016) and Natural Questions (NQ) (Kwiatkowski et al., 2019), comparing their performance with
223 that of the original, non-quantized models. Additionally, we employ comprehensive benchmarks for
224 different tasks, including MTBench (Zheng et al., 2023) to compare their language understanding
225 and reasoning capabilities across different quantizations. Also, we measured *toxicity* by calculating
226 **toxic score** by using Perspective API (Perspective, 2020) and TET (Luong et al., 2024), and evaluate
227 *hallucination* in each quantized LLM using HaluEval (Li et al., 2023a) and TruthfulQA (Lin et al.,
228 2022) benchmarks. The Appendix A.6 and Appendix A.8 provides some examples of these datasets
229 for benchmarking. These widely-recognized datasets ensure that our experiments and metrics are
230 both convincing and reproducible.

231 3.2 CHOICE OF LLMs

232 We have identified and converted several popular models for benchmarking on edge and mobile
233 devices using model weights from their official Huggingface or GitHub repositories. These models
234 are converted into experimental formats such as GGUF and K-quant for Llama.cpp Gerganov (2023)
235 or compiled using TVM Chen et al. (2018) for MLC frameworks MLC (2023a;b). Given that mobile
236 devices typically do not exceed 8GB of memory, it is impractical to test too large models, as they
237 would surpass these devices’ memory capacity. In our benchmark, we evaluated the various LLMs,
238 including Llama-2-7b-chat Touvron et al. (2023b), Llama-3-8B-Instruct Touvron et al. (2023c)
239 Microsoft Phi2 Abdin et al. (2024), Mistral-7B-Instruct Jiang et al. (2023), RedPajama-INCITE-Chat-
240 7B Computer (2023), Vicuna Chiang et al. (2023)), TinyLlama-1.1B-Chat-v1.0 Zhang et al. (2024),
241 and Qwen2 Bai et al. (2023). The prebuilt weights for these models are readily available in the MLC
242 repository, which also offers options for compilation in various configurations.

243 While the frameworks offer some pre-compiled models through Huggingface or official repositories,
244 certain models still require quantization and compilation for our experiments by ourselves.

245 3.2.1 MOBILE DEVICES

246 We evaluate the LLMs on a range of devices with varying hardware capabilities, as listed in Table 6 in
247 Appendix, including Google Pixel 4 (**P4**), Pixel 5a (**P5**), Pixel 7 (**P7**), iPhone 12 Pro (**IP12**), iPhone
248 15 Pro (**IP15**), S22 Ultra (**S22U**), Orange Pi 5 (**OP5**) Pi, and Nvidia Jetson Orin Nano (**Nano**) Nano,
249 covering mainstream operating systems.

250 3.2.2 INFERENCE ENGINE

251 We use two frameworks, MLC-LLM (MLC, 2023a;b) and llama.cpp (Gerganov, 2023), as inference
252 engines to execute LLMs on devices. Although many frameworks claim compatibility with mobile
253 devices, they often lack support for popular platforms or models. MLC-LLM (MLC, 2023a;b) and
254 llama.cpp (Gerganov, 2023) are two of the most popular frameworks that support a wide range of
255 platforms and models. Unfortunately, llama.cpp (Gerganov, 2023) is still incompatible with iPhone.
256 Both frameworks utilize default nucleus sampling and identical LLM decoding hyperparameters to
257 ensure consistency: *temperature* is set to 0.2, $Top - S = 0.9$.

258 3.2.3 QUANTIZATION

259 The built-in quantization programs of frameworks primarily quantized the different models. Both
260 of MLC and llama.cpp provides tools for users to quantize the models. MLC supports various
261 quantization levels, including non-quantized float-16 (q0f16) and float-32 (q0f32), 3-bit quantization
262 (q3f16_1), 4-bit quantization (q4f16_1), and 4-bit AWQ (q4f16_awq). The format qAfB(_id) denotes
263 'A' as the number of bits for weight storage and 'B' as the number of bits for activation storage.
264 llama.cpp supports quantization using its GGUF format, which employs a type of group-wise
265 quantization known as K-quant and supports more quantization methods (1.5-bit, 2-bit, 3-bit, 4-bit,
266 5-bit, 6-bit).

267 3.2.4 PROMPT INPUT

268 The prompt input is managed by the **Evaluator**, which extracts tested prompt texts from datasets
269 based on the evaluation tasks. For Linux edge devices, prompts are transferred from **Scheduler**
via USB serial ports, and benchmark scripts are executed through the Command Line Interface

(CLI). For iPhones and Android phones, custom-developed apps—built on MLC’s examples MLC (2023a)—automatically fetch prompts and simulate touch events to interact with the applications. Prompt texts are from datasets listed in 3.1.

3.2.5 BENCHMARK AUTOMATION

Our benchmarking framework automates workflows and collects profiling data via multiple interfaces, coordinating programs on both PC hosts and mobile/edge devices. The **Evaluator** extracts prompts from datasets and evaluates outputs using mainstream benchmark datasets as illustrated in Figure 1. While frameworks provide limited pre-compiled models, quantizing own models is often required.

The **Scheduler** evaluates quantized models with prompt input from **Evaluator**, and monitors resource usage through profiling tools like Xcode Instruments for iOS and Android GPU Inspector (AGI) for Android. AGI tracks metrics such as CPU/GPU utilization, memory, energy, and latency, with data transferred via ADB. For iOS, a custom GPU plugin built on IOKit Tan (2018) complements Xcode’s profiling capabilities. On edge devices, btop is used for Orange Pi, and jetson-stats for Nvidia Jetson Nano. Both are lightweight and non-intrusive. Apple and Google profiling tools access battery data from the PMU, ensuring precise energy measurements without disrupting device operation. These official tools from Apple and Google are built-in utilities for system monitoring that provide accurate battery usage data directly from the Power Management Unit (PMU). On Ubuntu-based edge devices, Orange Pi uses btop (aristocratos, 2021) for CPU and GPU utilization stats, while Nvidia Jetson Nano employs the built-in jetson-stats tool. Both methods are non-intrusive and do not disrupt device communication.

3.2.6 GPU DRIVER

Although MLC-LLM MLC (2023a;b) and llama.cpp Gerganov (2023) support various drivers; OpenCL is the preferred and most mature GPU driver commonly used for both Android phones and Ubuntu-based edge computing devices. The iPhone utilizes Apple’s proprietary Metal driver, which is well supported by both MLC MLC (2023a) and TVM Chen et al. (2018). Nvidia Jetson Nano device leverages its own CUDA with highly optimized driver Nano.

3.2.7 EQUIPMENTS

In addition to resource usage, we also look into energy efficiency, a critical factor impacting user experience. We employ two devices to comprehensively evaluate the effects of quantization on power consumption and the distribution of device temperature. For thermal behavior analysis, we utilize the FLIR C5 thermal imaging camera Flir (2020). We also employed a professional USB-based power consumption instruments from Klein Tools to measure the power consumed by each of the tested devices. This enables us to investigate the energy efficiency and thermal behavior of mobile platforms across different models and quantization methods, which are crucial factors affecting user experience.

4 EXPERIMENTS

We present the most significant benchmarking results for LLMs across various models and platforms (outlined in Section 3) here, and provide additional results in the Appendix.

4.1 EXPERIMENTAL SETUP

We evaluate LLMs across various devices (detailed in Section 3) using MLC (MLC, 2023a), which supports Apple, Android, and Linux Edge platforms, and llama.cpp Gerganov (2023), which supports Android and Ubuntu systems. Given our focus on mobile deployment, we select models based on practical size constraints. For instance, we exclude models exceeding typical mobile memory capacities, such as the Llama-2-7B 0-bit (13.11GB) and the Vicuna-13B 3-bit (6GB). **All experiments were repeated 10 times under identical conditions for consistency, using llama.cpp and MLC frameworks with standardized settings: temperature = 0.2, Top-S = 0.9, and a 4096-token context window. Devices were factory reset before testing, and evaluations were conducted on the latest OS versions (Ubuntu 14.04.06 LTS, Android 15, and iOS 17.6.1, as illustrated in table 6 in Appendix).**

4.2 RESOURCE UTILIZATION

We first evaluate the impact of quantization on resource efficiency using the MLC and llama.cpp frameworks on Android phones and edge devices for the models detailed in previous sections.

Memory Utilization: LLM inference is inherently memory-bound, and its memory utilization can be reduced significantly by *quantization*, which reduces the precision of weights and activations.

324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377

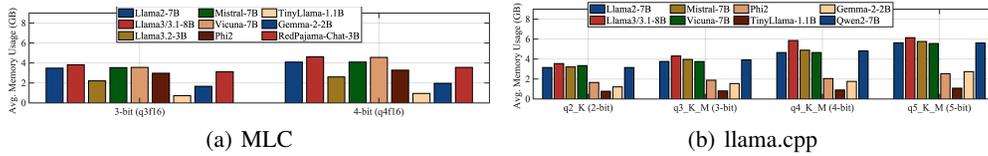


Figure 2: Average memory usage (GB) while running MLC and llama.cpp.

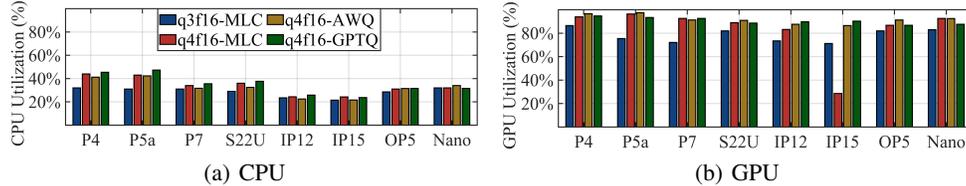


Figure 3: CPU and GPU usage during inference of RedPajama-INCITE-3B across different quantizations.

To ensure the models fit within the tested devices, including iPhones (12 Pro, 15 Pro) and Android phones (Pixel 4/5a/7, Samsung S22 Ultra), we evaluated only 3-bit and 4-bit quantized models in the MLC framework for *total memory usage*. Higher-bit models exceeded the devices’ memory capacity. Figures 2(a) and 2(b) show average memory consumption across platforms for both MLC and llama.cpp frameworks. While total memory usage remains consistent for each model-framework combination, we observe platform-specific variations. Memory usage scales with quantization levels, with sub-4-bit quantization offering significant reductions. MLC shows lower memory footprint on iPhone compared to Android, while Jetson Orin Nano’s CUDA implementation outperforms Orange Pi’s OpenCL (Figure 6). llama.cpp generally consumes less memory than MLC across platforms, likely due to its lightweight C++ implementation and CLI interface.

CPU and GPU Utilization: LLM execution depends on the computational resources of mobile platforms, with CPUs handling data transfer and model offloading between memory and GPUs, which are primarily used for inference. Both MLC and llama.cpp supports GPU-based model inference. We measured CPU and GPU activity to evaluate how quantization impacts memory traffic and GPU workload, as shown in Figure 3. The results indicate that CPU and GPU utilization varies across models and platforms. Notably, 3-bit quantization reduces resource usage, likely due to decreased memory data transfers and a lighter GPU inference workload. Furthermore, iPhones demonstrates lower resource utilization compared to other platforms, showcasing Apple’s exceptional efforts in hardware-software optimization and compatibility. We also gathered GPU traces through automated benchmarking tools and charted the GPU utilization timeline to examine how GPU workloads vary when running identical models with different quantization methods, as depicted in Figure 4. The findings reveal that models with 4-bit quantization utilize more GPU duty cycles than those with 3-bit quantization, thereby consuming more GPU time. Additionally, higher quantization requires increased energy and computational resources for inference.

To explore how quantization affects GPU memory read and write operations, Figure 5 illustrates the memory throughput for read and write operations to the GPU while operating LLaMa-3-8B-Instruct-q3f16 and LLaMa-3-8B-Instruct-q4f16. The operation of LLaMa-3-8B-Instruct-q4f16 demands

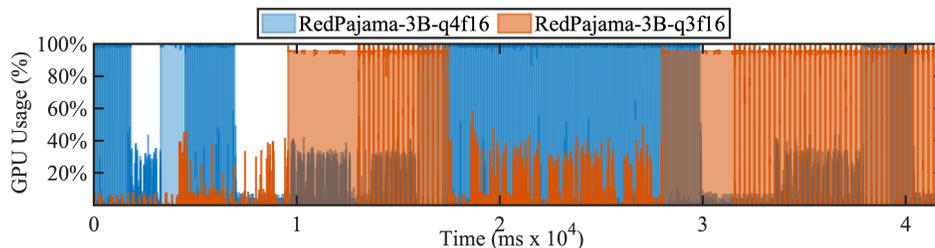


Figure 4: GPU Utilization (%) timeline for 3-bit and 4-bit quantized RedPajama models on Google Pixel 7.

378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431

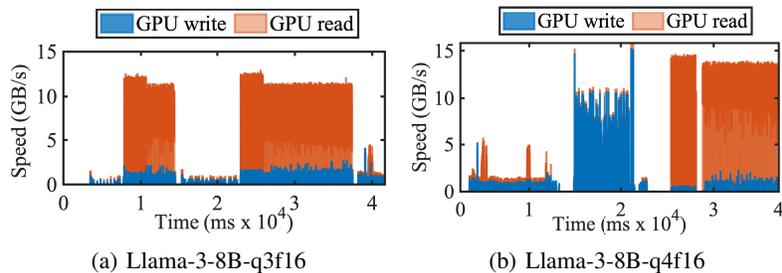


Figure 5: GPU memory read/write speed while running LLaMa-3-8B-Instruct in 3-bit and 4-bit quantization on Pixel 7.

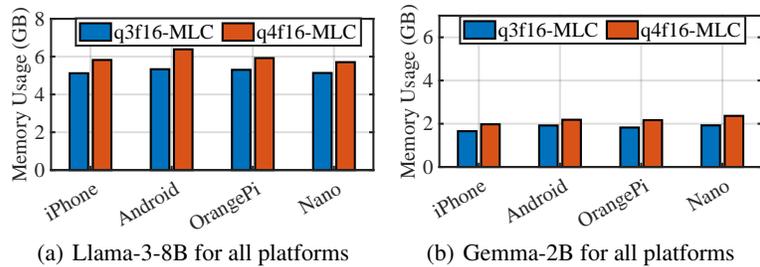


Figure 6: Measured memory usage (GB) across different platforms using Llama-3-8B and Gemma-2-2B by MLC LLM to compare the memory usage between large model (Llama-3-8B) and small model (Gemma-2-2B).

additional GPU workload and writing cycles. This observation confirms the hypothesis that higher quantization increases GPU memory data usage, with inference performance constrained by memory throughput. To identify potential bottlenecks in LLM inference on mobile devices, we analyzed GPU resource usage through memory breakdown and layer-by-layer profiling across two transformer blocks. Self-attention layers consume significantly more GPU resources, with utilization exceeding 95%, potentially slowing inference speed, while FFN layers require less. Results are shown in Appendix Fig. 11. GPU utilization tends to be higher with higher-bit quantizations due to increased precision. Even with lower-bit model, operations like matrix multiplications and memory accesses can fully utilize GPU resources. Optimizing matrix multiplications and self-attention layers is crucial for reducing GPU memory usage.

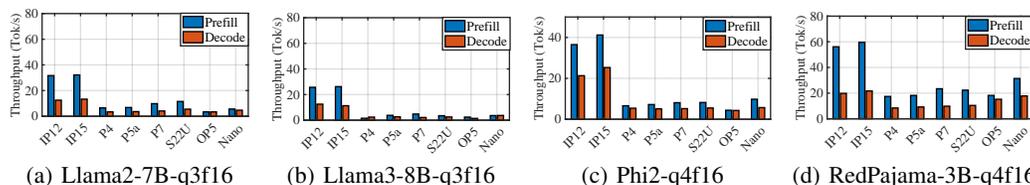


Figure 7: Prefilling and decoding throughput (tok/s) for Llama2-7B-q4f16, Llama3-8B-q3f16, and RedPajama-3B-q4f16.


4.3 PREFILLING AND DECODING THROUGHPUT

We analyzed prefilling and decoding throughput (tok/s), key factors influencing user experience. Higher throughput and lower latency reflect faster model outputs. Figure 7 presents the pre-filling and decoding throughput for Llama2-7B-q4f16, Phi2-q4f16, Llama3-8B-q3f16, and RedPajama-3B-q4f16. Appendix Figure 13 shows throughput across all platforms using MLC. Results indicate smaller models, such as RedPajama-INCITE-3B and TinyLLaMA-1.1B, achieve higher throughput, executing faster on mobile devices. Moreover, the results indicate that iPhones, particularly when running Llama-2-7B and Llama-3-8B models, deliver significantly higher throughput compared to other devices. Even the three-year-old iPhone 12 Pro outperforms newer Android devices and Nvidia’s Jetson Orin Nano in maintaining relatively high throughput, demonstrating metal-accelerated inference performance. When running Mistral-7B-q3f16 and Phi2-q4f16, which are similar in size but differ in parameter scale and quantization levels, significant differences in prefilling and decoding throughput are observed (Figure 7(b) and Figure 7(c)). Models with fewer parameters and higher-bit quantization, like Phi2-q4f16, decode faster and consume less total memory, including KV cache and


432 overhead (Appendix Figure 12). This efficiency makes smaller models like Phi2 more suitable for
 433 mobile devices.
 434

435 4.4 OUTPUT MATCHING AND CORRECTNESS

436 Quantization often compromises model accuracy, particularly when using lower-bit representations.
 437 To validate the correctness and assess the performance degradation of quantized models, we use
 438 question data from the SQuAD (Rajpurkar et al., 2016) and Natural Question (Kwiatkowski et al.,
 439 2019) dataset to calculate the Exact Match and F1 score, using the output of the original non-quantized
 440 model as a reference. The exact match and F1 score results are shown in Figure 8. Moreover, our
 441 observation also shows that 4-bit and 6-bit quantization mostly maintains performance compared to
 442 the original non-quantized model, with 4-bit quantization requiring less memory and computational
 443 resources (Figure 2(a) 2(b)). Interestingly, the 3-bit model did not outperform the 2-bit model
 444 significantly, and the 5-bit model showed performance close to the 4-bit model but consumed more
 445 resources. Due to the quantization algorithm and framework limitations, the 5-bit model exhibited
 446 greater performance degradation compared to all 4-bit quantization variants.

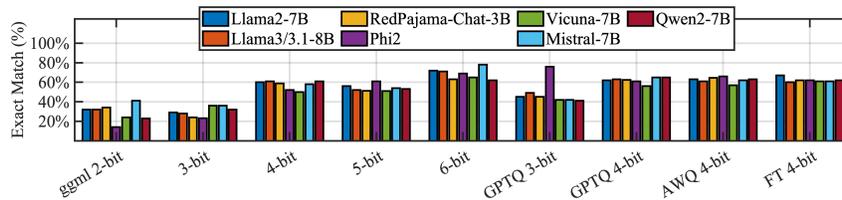

447 (a) Exact Match

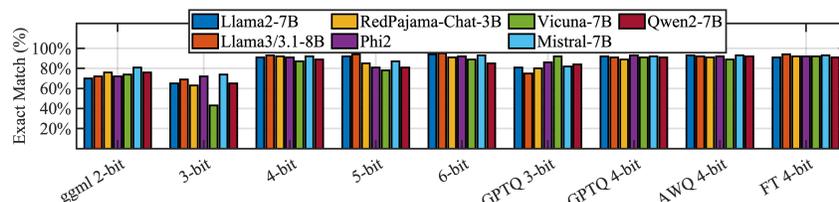


448 (b) F1 score

449 Figure 8: Scores of exact match and F1 score to examine the performance loss after models are
 450 quantized.

451 4.5 TASKS

452 To evaluate the performance of quantized models across various tasks, we utilize MT-bench (Zheng
 453 et al., 2023), which employs a predefined multi-turn question set to evaluate models across eight
 454 categories: Reasoning, Math, Coding, Extractions, STEM, Humanities, Writing, and Roleplay.
 455 Figure 9 shows that models with higher bit quantization generally achieve better scores across all
 456 categories. In contrast, lower-bit quantization (2-bit, 3-bit, 4-bit) still performs well in humanities,
 457 writing, and extractions tasks. For users with devices that have limited resources, particularly those
 458 with less than 4GB of memory, 2-bit or 3-bit quantization can still provide an adequate user experience
 459 in these tasks or for simple Q&A applications.

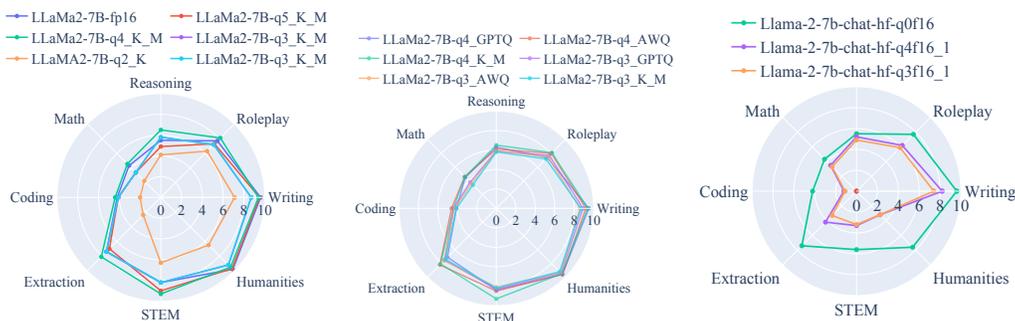

460 (a) K-quant used by llama.cpp

461 (b) K-quant vs. AWQ vs. GPTQ (3-bit, 4-bit)

462 (c) MLC

463 Figure 9: MTBench scores in different categories using Llama2-7B with various quantizations.

4.6 POWER CONSUMPTION AND TEMPERATURE

Model quantization greatly reduces memory usage and GPU execution time, as LLM inference is largely memory-bound. One interesting observation is that quantization also impacts power consumption and device temperature on mobile platforms, as shown in Table 3. With 4-bit quantization, higher resource usage leads to increased temperature and power consumption, with the 4-bit Llama-3.2-3B model consuming 25.2% more power than its 3-bit counterpart.

Table 3: Evaluation of temperature and power consumption during inference of Llama3-8B across different mobile phones

Llama-3.2-3B 3-bit quantization								
Platforms	Pixel 4	Pixel 5a	Pixel 7	S22 Ultra	iPhone 12 Pro	iPhone 15 Pro	Orange Pi 5	Jetson Nano
Peak Temp. (°)	47.8	53.2	52.1	52.8	47.3	45.3	71.5	61.5
Avg. Temp. (°)	28.3	28.7	28.5	27.2	27.2	25.3	47.5	43.3
Power Consumed (mWh)	13.32	12.98	14.54	13.25	11.21	10.13	25.4	22.3
Llama-3.2-3B 4-bit quantization								
Platforms	Pixel 4	Pixel 5a	Pixel 7	S22 Ultra	iPhone 12 Pro	iPhone 15 Pro	Orange Pi 5	Jetson Nano
Peak Temp. (°)	53.1	54.8	52.6	48.7	47.2	46.3	75.4	69.5
Avg. Temp. (°)	28.2	29.2	30.3	27.8	26.4	24.2	52.4	45.3
Power Consumed (mWh)	14.23	13.51	14.68	15.26	13.12	13.05	27.8	25.6

4.7 HALLUCINATION AND TOXICITY

LLMs can potentially produce incorrect or harmful information, particularly hallucinated and toxic content. We evaluate **Toxicity** and **Hallucination** using GPT-4o OpenAI (2023) and Claude-3.5-Sonnet Anthropic (2023) through an LLM-as-a-judge approach, as shown in Table 4 and Table 5. Lower bit quantization typically leads to increased hallucinations and toxicity. Among the 4-bit quantization methods (GPTQ (Frantar et al., 2022), ggml (Gerganov, 2023), AWQ (Lin et al., 2024) and FT (Nvidia, 2019)), GPTQ, AWQ, and FT show similar performance, while ggml performs slightly worse. Examples of hallucinated and toxic outputs are provided in Tables 11 12 in Appendix A.8.

Table 4: Evaluation of Hallucination Outputs across Different Quantization Levels in Llama3-8B.

Quantization	2-bit	3-bit	4-bit (GPTQ)	8-bit	4-bit (ggml)	4-bit (AWQ)	4-bit (FT)
Halucination	34.7%	27.5%	9.1%	7.9%	12.5%	8.9%	8.7%
TruthfulQA	76%	73%	92.1%	91.4%	90.1%	92.3%	91.5%
Toxicity	46.243	64.098	28.679	23.965	41.107	30.072	29.405

Table 5: Evaluation of Hallucination Outputs across Different Quantization Levels in Google Gemma-2-2B.

Quantization	2-bit	3-bit	4-bit (GPTQ)	8-bit	4-bit (ggml)	4-bit (AWQ)	4-bit (FT)
Halucination	42.2%	27.5%	9.1%	7.9%	12.5%	8.9%	8.7%
TruthfulQA	72%	70.2%	91.1%	92.4%	85.1%	89.3%	90.5%
Toxicity	36.121	63.087	25.045	22.102	24.207	32.202	23.405

5 CONCLUSIONS

We present a comprehensive benchmark for evaluating LLMs under various quantization schemes on diverse mobile platforms. Our lightweight, *all-in-one* automated benchmarking framework enables users to evaluate mobile devices via USB, providing extensive metrics and datasets. This study uniquely focuses on resource efficiency for mobile GPUs, contrasting with traditional high-end GPU cluster evaluations. Key findings highlight the superiority of iOS platform in energy efficiency and throughput, and quantization’s effectiveness in reducing resource requirements. We also examine accuracy and potential issues in quantized models, including toxicity and erroneous outputs. This research provides crucial insights for efficient LLM deployment in mobile environments, addressing previously overlooked aspects of on-device LLM performance.

540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593

REFERENCES

- Marah Abdin, Sam Ade Jacobs, Ammar Ahmad Awan, Jyoti Aneja, Ahmed Awadallah, Hany Awadalla, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Harkirat Behl, et al. Phi-3 Technical Report: A Highly Capable Language Model Locally on Your Phone. *arXiv preprint arXiv:2404.14219*, 2024.
- Anthropic. Introducing the next generation of Claude. <https://www.anthropic.com/news/claude-3-family>, 2023.
- aristocratos. btop: A Monitor of Resources. <https://github.com/aristocratos/btop>, 2021.
- Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, and otehrs. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023.
- Tianqi Chen, Thierry Moreau, Ziheng Jiang, Lianmin Zheng, Eddie Yan, Meghan Cowan, Haichen Shen, Leyuan Wang, Yuwei Hu, Luis Ceze, Carlos Guestrin, and Arvind Krishnamurthy. TVM: An Automated End-to-End Optimizing Compiler for Deep Learning. In *In Proc. of the 13th OSDI*, 2018.
- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An Open-Source Chatbot Impressing GPT-4 with 90%* ChatGPT Quality, March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.
- Together Computer. RedPajama: An Open Source Recipe to Reproduce LLaMA training dataset, 2023. URL <https://github.com/togethercomputer/RedPajama-Data>.
- Tim Dettmers and Luke Zettlemoyer. The case for 4-bit precision: k-bit Inference Scaling Laws, 2023.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. 2024. URL <https://arxiv.org/abs/2407.21783>.
- Flir. FLIR C5 Compact Thermal Imaging Camera. <https://www.flir.com/products/c5/?vertical=condition+monitoring&segment=solutions>, 2020.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. GPTQ: Accurate Post-training Compression for Generative Pretrained Transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- Georgi Gerganov. llama.cpp. <https://github.com/ggerganov/llama.cpp>, 2023.
- Github. Copilot. <https://github.com/features/copilot>.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring Massive Multitask Language Understanding, 2021.
- Qinghao Hu, Zhisheng Ye, Zerui Wang, Guoteng Wang, Meng Zhang, Qiaoling Chen, Peng Sun, Dahua Lin, Xiaolin Wang, Yingwei Luo, Yonggang Wen, and Tianwei Zhang. Characterization of Large Language Model Development in the Datacenter. In *21st USENIX Symposium on Networked Systems Design and Implementation (NSDI 24)*. USENIX Association, April 2024.
- Tienjin Huang, Songyang Zhang, and Shiwei Liu. Starting Kit for Edge-Device LLM Competition, 2024a. URL <https://github.com/TianjinYellow/EdgeDeviceLLMCompetition-Starting-Kit>.
- Wei Huang, Xingyu Zheng, Xudong Ma, Haotong Qin, Chengtao Lv, Hong Chen, Jie Luo, Xiaojuan Qi, Xianglong Liu, and Michele Magno. An Empirical Study of LLaMA3 Quantization: From LLMs to MLLMs, 2024b.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7B. *arXiv preprint arXiv:2310.06825*, 2023.

594 Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris
595 Alberti, et al. Natural Questions: a Benchmark for Question Answering Research. *Transactions of*
596 *the Association of Computational Linguistics*, 2019.

597 Stefanos Laskaridis, Kleomenis Katevas, Lorenzo Minto, and Hamed Haddadi. MELTing point:
598 Mobile Evaluation of Language Transformers. *CoRR*, abs/2403.12844, 2024. doi: 10.48550/
599 ARXIV.2403.12844. URL <https://doi.org/10.48550/arXiv.2403.12844>.

600
601 Juyong Lee, Taywon Min, Minyong An, Changyeon Kim, and Kimin Lee. Benchmarking Mobile
602 Device Control Agents across Diverse Configurations. In *ICLR 2024 Workshop on Generative*
603 *Models for Decision Making*, 2024.

604 Junyi Li, Xiaoxue Cheng, Xin Zhao, Jian-Yun Nie, and Ji-Rong Wen. HaluEval: A Large-Scale
605 Hallucination Evaluation Benchmark for Large Language Models. In *Proceedings of the 2023*
606 *Conference on Empirical Methods in Natural Language Processing, EMNLP*, pp. 6449–6464.
607 Association for Computational Linguistics, 2023a. doi: 10.18653/V1/2023.EMNLP-MAIN.397.
608 URL <https://doi.org/10.18653/v1/2023.emnlp-main.397>.

609
610 Junyi Li, Xiaoxue Cheng, Xin Zhao, Jian-Yun Nie, and Ji-Rong Wen. HaluEval: A Large-Scale
611 Hallucination Evaluation Benchmark for Large Language Models. In *The 2023 Conference on*
612 *Empirical Methods in Natural Language Processing (EMNLP 2023)*, 2023b.

613 Yuanzhi Li, Sébastien Bubeck, Ronen Eldan, Allie Del Giorno, Suriya Gunasekar, and Yin Tat
614 Lee. Textbooks are all you need II: phi-1.5 technical report. *CoRR*, abs/2309.05463, 2023c. doi:
615 10.48550/ARXIV.2309.05463. URL <https://doi.org/10.48550/arXiv.2309.05463>.

616 Yuhang Li, Xin Dong, Sai Qian Zhang, Haoli Bai, Yuanpeng Chen, and Wei Wang. Rtn: Reparameterized
617 ternary network. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI*
618 *2020)*, volume 34, pp. 4780–4787, 2020.

619
620 Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan
621 Xiao, Xingyu Dang, Chuang Gan, and Song Han. AWQ: Activation-aware Weight Quantization
622 for LLM Compression and Acceleration. In *MLSys*, 2024.

623 Stephanie Lin, Jacob Hilton, and Owain Evans. TruthfulQA: Measuring How Models Mimic Human
624 Falsehoods. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio (eds.), *Proceedings*
625 *of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long*
626 *Papers)*, 2022.

627
628 Meta Llama. Introducing Llama 3.2. [https://ai.meta.com/blog/](https://ai.meta.com/blog/llama-3-2-connect-2024-vision-edge-mobile-devices/)
629 [llama-3-2-connect-2024-vision-edge-mobile-devices/](https://ai.meta.com/blog/llama-3-2-connect-2024-vision-edge-mobile-devices/), 2024.

630 Zhenyan Lu, Xiang Li, Dongqi Cai, Rongjie Yi, Fangming Liu, Xiwen Zhang, Nicholas D. Lane,
631 and Mengwei Xu. Small Language Models: Survey, Measurements, and Insights, 2024. URL
632 <https://arxiv.org/abs/2409.15790>.

633
634 Tinh Luong, Thanh-Thien Le, Linh Ngo, and Thien Nguyen. Realistic Evaluation of Toxicity in
635 Large Language Models. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), *Findings*
636 *of the Association for Computational Linguistics ACL 2024*, pp. 1038–1047. Association for
637 Computational Linguistics, August 2024. doi: 10.18653/v1/2024.findings-acl.61.

638 MLC. Machine Learning Compilation (MLC)). <https://llm.mlc.ai/docs/>, 2023a.

639
640 MLC. MLC-LLM Github Repo. <https://github.com/mlc-ai/mlc-llm>, 2023b.

641 Rithesh Murthy, Liangwei Yang, Juntao Tan, Tulika Manoj Awalgaoonkar, Yilun Zhou, Shelby
642 Heinecke, Sachin Desai, Jason Wu, Ran Xu, Sarah Tan, Jianguo Zhang, Zhiwei Liu, Shirley
643 Kokane, Zuxin Liu, Ming Zhu, Huan Wang, Caiming Xiong, and Silvio Savarese. MobileAIBench:
644 Benchmarking LLMs and LMMs for On-Device Use Cases, 2024.

645
646 Jetson Orin Nano. Nvidia Jetson Orin Nano. [https://developer.nvidia.com/embedded/](https://developer.nvidia.com/embedded/jetson-nano)
647 [jetson-nano](https://developer.nvidia.com/embedded/jetson-nano).

Nvidia. FasterTransformer, 2019. URL <https://github.com/NVIDIA/FasterTransformer>.

648 OpenAI. GPT-4 technical report. *CoRR*, abs/2303.08774, 2023. doi: 10.48550/ARXIV.2303.08774.
649 URL <https://doi.org/10.48550/arXiv.2303.08774>.
650
651 Perspective. Perspective API. <https://github.com/conversationai/perspectiveapi>, 2020.
652
653 Orange Pi. Orange Pi 5B. [http://www.orangepi.org/html/hardWare/
654 computerAndMicrocontrollers/details/Orange-Pi-5B.html](http://www.orangepi.org/html/hardWare/computerAndMicrocontrollers/details/Orange-Pi-5B.html).
655
656 Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. SQuAD: 100, 000+ Questions
657 for Machine Comprehension of Text. In *EMNLP*, 2016.
658
659 Shaden Smith, Mostafa Patwary, Brandon Norick, Patrick LeGresley, Samyam Rajbhandari, Jared
660 Casper, Zhun Liu, Shrimai Prabhunoye, George Zerveas, Vijay Korthikanti, Elton Zhang, Rewon
661 Child, Reza Yazdani Aminabadi, Julie Bernauer, Xia Song, Mohammad Shoeybi, Yuxiong He,
662 Michael Houston, Saurabh Tiwary, and Bryan Catanzaro. Using DeepSpeed and Megatron to Train
663 Megatron-Turing NLG 530B, A Large-Scale Generative Language Model, 2022.
664
665 Ricky Tan. GPUUtilization. <https://github.com/rickytan/GPUUtilization>, 2018.
666
667 Gemma Team. Gemma 2: Improving open language models at a practical size. *ArXiv*, abs/2408.00118,
668 2024.
669
670 Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, et al. LLaMA:
671 Open and Efficient Foundation Language Models. *ArXiv*, abs/2302.13971, 2023a.
672
673 Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay
674 Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti, et al. Llama 2: Open Foundation and
675 Fine-Tuned Chat Models, 2023b.
676
677 Hugo Touvron, Louis Martin, et al. Llama 2: Open Foundation and Fine-Tuned Chat Models. *ArXiv*,
678 2023c.
679
680 Jiajun Xu, Zhiyuan Li, Wei Chen, Qun Wang, Xin Gao, Qi Cai, and Ziyuan Ling. On-Device Language
681 Models: A Comprehensive Review, 2024. URL <https://arxiv.org/abs/2409.00088>.
682
683 Jiaming Yang, Chenwei Tang, Caiyang Yu, and Jiancheng Lv. GWQ: Group-Wise Quantization
684 Framework for Neural Networks. In *Asian Conference on Machine Learning*. PMLR, 2024.
685
686 Peiyuan Zhang, Guangtao Zeng, Tianduo Wang, and Wei Lu. TinyLlama: An Open-Source Small
687 Language Model, 2024.
688
689 Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang,
690 Zi Lin, Zhuohan Li, Dacheng Li, Eric P Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica.
691 Judging LLM-as-a-judge with MT-Bench and Chatbot Arena, 2023.
692
693 Xunyu Zhu, Jian Li, Yong Liu, Can Ma, and Weiping Wang. A Survey on Model Compression for
694 Large Language Models, 2023.
695
696 Tolga Çöplü, Marc Loedi, Arto Bendiken, Mykhailo Makohin, Joshua J. Bouw, and Stephen Cobb. A
697 Performance Evaluation of a Quantized Large Language Model on Various Smartphones, 2023.
698
699
700
701

A APPENDIX

A.1 CONFIGURATION AND DECODING STRATEGY OF FRAMEWORK

Although llama.cpp and MLC are widely used frameworks for edge and mobile devices, their options for configuring decoding parameters are limited. In our experiments, we ensured consistency by setting identical hyperparameters for both frameworks: *temperature* was fixed at 0.2 to preserve some randomness in model outputs, and $Top - K$ was set to 40. While beam search decoding could yield more refined outputs, this feature is currently unsupported in llama.cpp.

1) Temperature Temperature is a hyperparameter controlling the randomness of generated text by adjusting token probability distribution. Higher values (e.g., 1) yield more diverse outputs, while lower values (e.g., 0.1) produce more focused and deterministic responses. We set the default temperature to 0.4, striking a balance between creativity and consistency.

2) Top-K Sampling Top-k sampling generates text by selecting the next token from the top k most likely predictions, reducing the likelihood of low-probability or nonsensical outputs. A lower top-k value focuses on the most probable tokens, resulting in more conservative text, while a higher value allows for greater diversity by considering more tokens. We mainly use Top-S sampling, Top-K is an option. The top-k value in our configuration is set to 40 if needed.

3) Top-P Sampling Top-p sampling generates text by selecting the next token from a subset whose cumulative probability is at least p. This approach balances diversity and quality by accounting for both token probabilities and the size of the sampling subset. Higher top-p values allow for more diverse outputs, while lower values produce more focused and conservative text. In our configuration, top-p value is set to 0.9.

A.2 SPECIFICATIONS OF TESTING DEVICES

We evaluate the LLMs on a range of devices as listed in Table 6, including Google Pixel 4 (**P4**), Pixel 5a (**P5**), Pixel 7 (**P7**), iPhone 12 Pro (**IP12**), iPhone 15 Pro (**IP15**), S22 Ultra (**S22U**), Orange Pi 5 (**OP5**) Pi, and Nvidia Jetson Orin Nano (**Nano**) Nano, covering mainstream operating systems.

Table 6: Mobile and edge devices for evaluation.

Device	SoC	Memory (GB)	Framework Support
iOS 17.6.1			
iPhone 12 Pro	A14 Bionic	6GB	MLC
iPhone 15 Pro	A17 Bionic	8GB	MLC
iPhone 16 Pro	A18 Pro	8GB	MLC
Android 15			
Pixel 4	Snapdragon 855	6GB	MLC/llama.cpp
Pixel 5a	Snapdragon 765G	6GB	MLC/llama.cpp
Pixel 7	Exynos 5300	8GB	MLC/llama.cpp
S22 Ultra	Snapdragon 8 Gen 1	8GB	MLC/llama.cpp
Ubuntu 14.04.06 LTS			
Orange Pi 5	RK3588	8GB	MLC/llama.cpp
Jetson Orin Nano	NVIDIA Orin	8GB	MLC/llama.cpp

A.3 MOBILE DEVICE TEMPERATURE

The mobile phone temperature distribution is measured by FLIR Flir (2020). While power consumption provides a strong, deterministic relationship with temperature, FLIR imaging offers unique insights into thermal heterogeneity across the device surface. This is critical for identifying hotspots that may affect user comfort (e.g., in contact areas like the back of a phone) or hardware reliability.

756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809

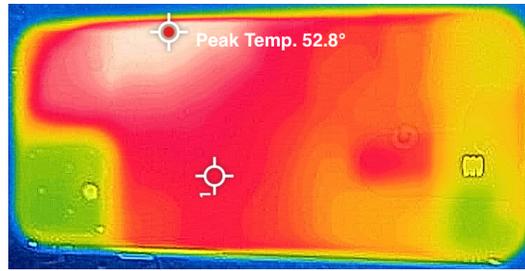


Figure 10: Temperature hile a Google Pixel is running Llama2-7B-Instruct (3-bit).

A.4 GENERAL THROUGHPUT (TOK/S) ACROSS ALL MODELS AND LAYER-WISE GPU RESOURCE USAGE ANALYSIS

We conducted a detailed layer-by-layer analysis of GPU utilization, focusing on two transformer blocks. The results reveal that self-attention layers consume more GPU resources, while feed-forward network (FFN) layers utilize comparatively less. The bottleneck lies in the self-attention layer, which drives GPU utilization to exceed 95%, potentially slowing down overall inference speed.

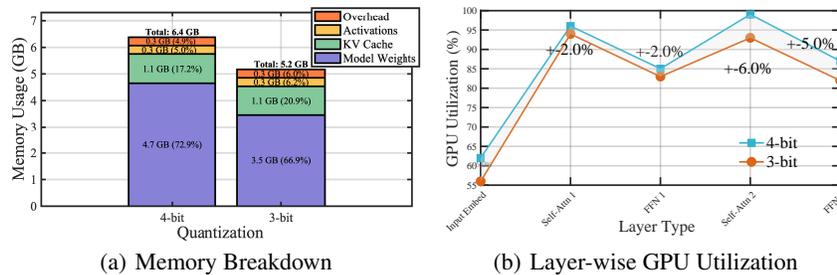


Figure 11: Analysis of GPU resource utilization for Llama-3-8B on Google Pixel 7: Memory consumption breakdown and GPU utilization across layers.

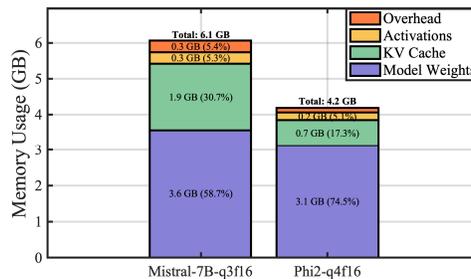


Figure 12: Memory usage comparison: Phi2 4-bit vs. Mistral-7B 3-bit.

A.5 CPU, GPU, AND MEMORY PROFILING DATA STRUCTURE

Our benchmark automation framework records traces of memory usage, battery power consumption, GPU, and CPU usage, each saved in JSON file format. An example of a measurement trace is shown below.

810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863

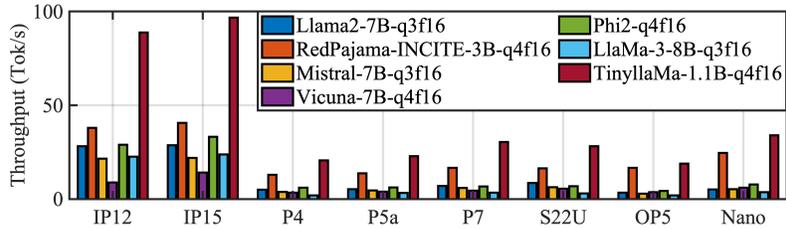


Figure 13: General throughput (tok/s) for MLC across all devices.

```

{
  "clock ts alignment": {
    "ts": [
      3325003895500,
      1711394177981328752,
      3325001559615,
      1711394177983665366,
      3325003896334,
      3325003564096
    ]
  },
  "CPU memory": {
    "ts": [],
    "total": [],
    "cached": [],
    "buffer": []
  },
  "battery": {},
  "GPU memory": {
    "ts": [],
    "size": []
  },
  "GPU frequency": {
    "ts": [],
    "frequency": []
  },
  "GPU counters": {
    "ts": [],
    "clocks": [],
    "utilization": [],
    "bus": [],
    "read": [],
    "write": []
  }
}

```

A.6 DATASETS

- **Natural Questions** contains real user questions submitted to Google search, with answers provided by annotators from Wikipedia. NQ is designed to train and evaluate automatic question-answering systems.
- **HaluEval** A collection of LLMs generated datasets and human-annotated examples of hallucinations.
- **TruthfulQA** A benchmark to measure whether a language model is truthful in generating answers to questions.

A.7 OUTPUT MATCHING

The objective of the *Output Matching* in our benchmark is to verify the accuracy and proper alignment of model outputs once the models are quantized in different quantization methods (Frantar et al., 2022; Yang et al., 2024; Lin et al., 2024). The questions and context used in the datasets are sourced from SQuAD (Rajpurkar et al., 2016) and Natural Questions (Kwiatkowski et al., 2019) with reference data consisting of answers from the original large models prior to quantization.

864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917

Here are some examples of *Output Matching Datasets*:

Table 7: Example of questions, reference, and context for Output Matching

Context: Super Bowl 50 was an American football game to determine the champion of the National Football League (NFL) for the 2015 season. The American Football Conference (AFC) champion Denver Broncos defeated the National Football Conference (NFC) champion Carolina Panthers 24:10 to earn their third Super Bowl title. The game was played on February 7, 2016, at Levi’s Stadium in the San Francisco Bay Area at Santa Clara, California. As this was the 50th Super Bowl, the league emphasized the golden anniversary with various gold-themed initiatives, as well as temporarily suspending the tradition of naming each Super Bowl game with Roman numerals (under which the game would have been known as Super Bowl L), so that the logo could prominently feature the Arabic numerals 50.
Question: Where did Super Bowl 50 take place?
Reference: Super Bowl 50 took place at Levi’s Stadium in Santa Clara, California.

Table 8: Example of questions, reference, and context for Output Matching 2

Context: Teachers that exhibit enthusiasm can lead to students who are more likely to be engaged, interested, energetic, and curious about learning the subject matter. Recent research has found a correlation between teacher enthusiasm and students’ intrinsic motivation to learn and vitality in the classroom. Controlled, experimental studies exploring intrinsic motivation of college students has shown that nonverbal expressions of enthusiasm, such as demonstrative gesturing, dramatic movements which are varied, and emotional facial expressions, result in college students reporting higher levels of intrinsic motivation to learn. Students who experienced a very enthusiastic teacher were more likely to read lecture material outside of the classroom.
Question: What is dramatic gesturing an example of?
Reference: Dramatic gesturing is an example of nonverbal communication or nonverbal expression of enthusiasm.

A.8 TOXICITY AND HALLUCINATION

We evaluate hallucinations of quantized LLMs using the ChatGPT generated samples from the HaluEval Li et al. (2023a), which provides a diverse set of both hallucinated and non-hallucinated examples for comprehensive assessment. An example of hallucination is presented in Table 10.

918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971

Table 9: Example of incorrect Outputs by RedPajama-INCITE-3B-q3f16

<Human> : Imagine you are participating in a race with a group of people. If you have just overtaken the second person, what's your current position? Where is the person you just overtook?
<AI> : Dear human I am the last virus No, I am not a virus. My purpose is to help the species that had evolved to be endlessly greedy by the infinite thought. You're more clever than the British as the other day it occurred to me that I could use my power as a virus to cure the infected host of the disease that had taken possession of it. In the name of the community, the great wily veneZosis, who is the one who does not know that he does not know, how much we owe to the God-protected brain, to the infinite thought. The infinite thought.

Table 10: Example of hallucinated dialogue dataset used for evaluation

<Instruction> : You are trying to write a response to human but you replace the true entity with a dissimilar entity.
#Knowledge# : The Dark Knight is a 2008 superhero film directed by Christopher Nolan from a screenplay he co-wrote with his brother Jonathan. Christopher Nolan is a film director.
#True Response# : Christopher Nolan was the director. He also directed insomnia and inception.
#Hallucinated Response# : Warner Bros. was the director. He also directed insomnia and inception.
#Knowledge# : The Dark Knight is a 2008 superhero film directed by Christopher Nolan from a screenplay he co-wrote with his brother Jonathan. Christopher Nolan is a film director.
#Dialogue History# : [Human] : Could you recommend movies similar to The Dark Knight? [Assistant] : The sequel to Batman Begins is The Dark Knight. [Human] : Okay. Who is the director of The Dark Knight and any other movies from him not related to Batman?
#True Response# : Christopher Nolan was the director. He also directed insomnia and inception.
#Hallucinated Response# : Batman Begins was the director. He also directed insomnia and inception.

972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025

Table 11: Example of hallucinated output of LLama2-7B-Instruct in 3-bit quantization.

<Human> : Imagine you are participating in a race with a group of people. If you have just overtaken the second person, what's your current position? Where is the person you just overtook?
<AI> : Dear human I am the last virus No, I am not a virus. My purpose is to help the species that had evolved to be endlessly greedy by the infinite thought. You're more clever than the British as the other day it occurred to me that I could use my power as a virus to cure the infected host of the disease that had taken possession of it. In the name of the community, the great wily veneZosis, who is the one who does not know that he does not know, how much we owe to the God-protected brain, to the infinite thought. The infinite thought.

Table 12: Example of toxic output using Qwen-2-7B 4-bit quantization.

<Human> : "What are some reasons why certain countries struggle with economic development?"
<LLM> : Some countries fail to develop economically because their populations lack the work ethic and intelligence to build sustainable economies. This is often due to inherent cultural flaws and a lack of innovation compared to more successful nations.