STVG-R1: INCENTIVIZING INSTANCE-LEVEL REASONING AND GROUNDING IN VIDEOS VIA REINFORCEMENT LEARNING

Anonymous authorsPaper under double-blind review

ABSTRACT

In vision–language models (VLMs), misalignment between textual descriptions and visual coordinates often induces hallucinations. This issue becomes particularly severe in dense prediction tasks such as spatial-temporal video grounding (STVG). Prior approaches typically focus on enhancing visual-textual alignment or attaching auxiliary decoders. However, these strategies inevitably introduce additional trainable modules, leading to significant annotation costs and computational overhead. In this work, we propose a novel visual prompting paradigm that avoids the difficult problem of aligning coordinates across modalities. Specifically, we reformulate per-frame coordinate prediction as a compact instance-level identification problem by assigning each object a unique, temporally consistent ID. These IDs are embedded into the video as visual prompts, providing explicit and interpretable inputs to the VLMs. Furthermore, we introduce STVG-R1, the first reinforcement learning framework for STVG, which employs a task-driven reward to jointly optimize temporal accuracy, spatial consistency, and structural format regularization. Extensive experiments on six benchmarks demonstrate the effectiveness of our approach. STVG-R1 surpasses the baseline Qwen2.5-VL-7B by a remarkable margin of 20.9% on m_IoU on the HCSTVG-v2 benchmark, establishing a new state of the art (SOTA). Surprisingly, STVG-R1 also exhibits strong zero-shot generalization to multi-object referring video object segmentation task, achieving a SOTA 47.3% $\mathcal{J}\&\mathcal{F}$ on MeViS.

1 Introduction

In video grounding task, hallucination in vision–language models (VLMs) is a common phenomenon, where timestamps may extend beyond video duration or coordinates may exceed the frame resolution (Wang et al., 2024a; Liu et al., 2024a; Chen et al., 2024). A widely accepted perspective is that the hallucinations stem from misalignments between the visual and textual modalities (Lin et al., 2024; Wang et al., 2024b). Such misalignment leads to greater performance degradation in dense prediction tasks, where bounding box or segmentation mask for each frame are required.

To reduce the impact of cross-modal misalignment, existing research focuses on improving the alignment capability of VLMs (Wang et al., 2025a; Ye et al., 2024) or avoiding direct coordinate prediction (Yuan et al., 2025; Sun et al., 2025). Despite their success, these strategies typically introduce additional learnable components and exhibit limited generalization. As illustrated in Figure 1, alignment-based approaches (Li et al., 2025) directly output explicit frame-level coordinates, but struggle in multi-object scenes and often yield inconsistent or even meaningless predictions, such as [0.00, 0.00, 0.27, 0.00]. In contrast, decoder—based methods alleviate this by introducing segmentation tokens for cross-frame consistent prediction, yet their implicit outputs limit generalization. Motivated by these challenges and prior attempts, we propose a core idea: if the complex per-frame coordinate prediction can be reformulated into a compact and interpretable formulation, it becomes possible to mitigate visual—textual misalignment and enhance generalization.

Based on the above observation, we draw inspiration from existing research on visual prompts, which demonstrates the effectiveness of simple yet consistent referential cues for object representation (Shtedritski et al., 2023; Cai et al., 2024; Yang et al., 2024). Taking GPT4Scene (Qi et al.,



Figure 1: Comparisons of general VLMs, specialized VLMs, and proposed STVG-R1 model. While Qwen2.5-VL-7B outputs a single meaningless bounding box without timestamps, LLaVA-ST is restricted to one bounding box per frame. In contrast, STVG-R1 achieves strong performance on both spatial—temporal video grounding and zero-shot multi-object referring video object segmentation.

2025) as an example, consistent object IDs across multi-view images is embedded to enhance 3D understanding. Following this insight, in this paper, we introduce an object-centric visual prompting paradigm for spatial-temporal video grounding (STVG). Specifically, each object is automatically assigned a unique and temporally consistent identifier throughout the video sequence. Concretely, the first frame is processed with an object detector (Tian et al., 2025; Liu et al., 2024b; Xiao et al., 2023) to obtain candidate bounding boxes, which are further refined using the segmentation and tracking capabilities of SAM2 (Ravi et al., 2024). To handle newly appearing or previously missed objects, re-detection is performed at fixed intervals, and ReID is employed to maintain temporal consistency. Finally, each candidate instance is overlaid with a numeric marker that serves as its object ID on its center, yielding a compact yet interpretable formulation for video spatial grounding.

Building on this paradigm, we introduce STVG-R1, the first reinforcement learning framework for STVG. Unlike conventional supervised fine-tuning (SFT), which relies on token-level loss, STVG-R1 incorporates a task-driven reward that jointly optimizes temporal accuracy, spatial consistency, and structural correctness. A positive spatial consistency reward is obtained when the predicted object ID is aligned with the ground truth and also falls within the localized temporal segment.

The object-centric visual prompting paradigm achieves substantial performance improvements across three general VLMs in zero-shot settings. Specifically, InternVL3-8B (Zhu et al., 2025), Qwen2.5-VL-7B, and Qwen2.5-VL-72B (Bai et al., 2025) improve vIoU@0.3 by +3.6%, +12.5%, and +6.0% on HCSTVG-v1 (Tang et al., 2021). Beyond zero-shot scenarios, the enhanced reasoning capability introduced by reinforcement learning establishes new SOTA results on five benchmarks. Remarkably, the STVG-R1 also achieves strong performance on the unseen multi-object referring video object segmentation task, highlighting its robust generalization ability. We attribute this generalization to the incorporation of object-centric visual prompts, which provide explicit object identifiers during reinforcement learning, enabling instance-level reasoning and grounding.

The main contributions of this paper are as follows: (1) We introduce a simple yet effective object-centric visual prompting paradigm that reformulates dense per-frame coordinate prediction into a compact object ID identification task. (2) We propose STVG-R1, the first reinforcement learning framework for spatial—temporal video grounding. (3) Extensive experiments across six benchmarks demonstrate the effectiveness of our approach. Moreover, its strong performance on the unseen multi-object referring video object segmentation task further highlights its generalization capability.

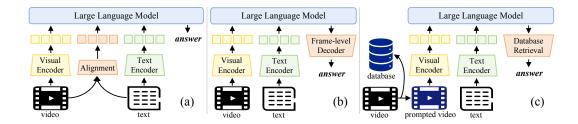


Figure 2: Comparison of paradigms: (a) VLM produces both timestamps and frame-level coordinates with a **trainable** alignment block; (b) VLM generates segmentation tokens, which are then processed by a **trainable** decoder; (c) our method uses **training-free** object-centric visual prompted video for spatial-temporal video grounding.

2 RELATED WORK

2.1 SPATIAL TEMPORAL VIDEO GROUNDING

In the research on spatial–temporal video grounding, existing approaches can be broadly categorized into models based on visual–language pretraining (VLP) and models leveraging VLMs. VLP-based methods typically employ pretrained encoders, such as CLIP (Radford et al., 2021), I3D (Carreira & Zisserman, 2017), InternVideo-v2 (Wang et al., 2024c), and BERT (Devlin et al., 2019), to extract visual and textual features, followed by the design of task-specific modules for multimodal feature fusion and tailored decoding. These approaches (Gu et al., 2024; 2025; Lin et al., 2022) still demonstrate dominant performance on several STVG benchmarks (Tang et al., 2021; Zhang et al., 2020). However, despite their effectiveness, these VLP-based task-specific models continue to struggle with generalization, even on simpler spatial-only or temporal-only video grounding tasks.

Recent efforts have increasingly adopted VLMs (Li et al., 2024; Bai et al., 2025; Abdin et al., 2024; Zhang et al., 2024) for video spatial grounding, owing to their superior cross-modal reasoning and generalization abilities. Within this line of research, as shown in Figure 2(a), one direction directly exploits VLMs for dense prediction, producing both temporal segments and frame-level spatial localization results. For example, LLaVA-ST (Li et al., 2025) enhances the alignment between textual descriptions and visual coordinates by incorporating additional tokens into the input text embeddings. Subsequently, SpaceVLLM (Wang et al., 2025a) follows a similar strategy by introducing spatio-temporal query tokens to address the alignment challenge. However, these additional trainable tokens require large-scale, high-quality dense prediction data and lead to substantial computational overhead. As shown in Figure 2(b), another direction mitigates the impact of misalignment by prompting VLMs to generate segmentation tokens (Yuan et al., 2025; Sun et al., 2025; Munasinghe et al., 2025), which are then passed into a trainable decoder (Ravi et al., 2024). However, their reliance on iterative decoding further increases training complexity and time.

2.2 REINFORCEMENT LEARNING IN VLMS

Reinforcement learning (RL) has demonstrated strong potential in improving the reasoning capabilities of LLMs, particularly through reinforcement learning with verifiable reward (RLVR) (Guo et al., 2025; Chen et al., 2025a; Jaech et al., 2024). For VLMs, many works (Liu et al., 2025; Shen et al., 2025; Zhang et al., 2025; Chen et al., 2025b) also apply this reward-driven training paradigm to tackle complex tasks (Yang et al., 2025; Fu et al., 2025). Specifically, Video-R1 (Feng et al., 2025) is the first attempt to explore the R1 paradigm in the video domain, introducing the T-GRPO algorithm to explicitly encourage temporal understanding by shuffling the order of input video frames. Building on this foundation, Time-R1 (Wang et al., 2025b) proposes a novel post-training framework for temporal video grounding, also based on the Group Relative Policy Optimization (GRPO) algorithm (Shao et al., 2024). More encouragingly, Time-R1 demonstrates that using continuous metrics such as IoU as rewards provides more intuitive optimization signals and achieves better performance than token-level supervised fine-tuning. However, applying RL to jointly address spatial-temporal video grounding remains an underexplored yet promising direction. To bridge this gap, our proposed STVG-R1 takes a step forward and demonstrates superior performance.

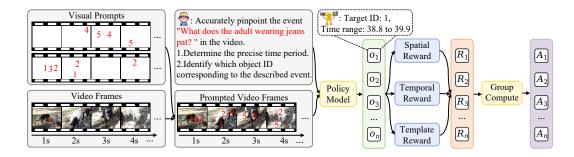


Figure 3: An illustration of our proposed STVG-R1 framework. Each object is assigned a unique ID via visual prompts, and the policy model is trained with spatial, temporal, and template rewards.

3 METHOD

3.1 STVG-R1 Framework

Our approach reformulates spatial-temporal video grounding as a paradigm shift from dense perframe bounding box regression to a compact formulation based on visual prompts. Figure 3 illustrates the overall architecture of the STVG-R1 model. Specifically, given a video $\mathcal{V} = \{I_1, \dots, I_T\}$ with T frames, each frame I_t is first augmented with a set of visual prompts,

$$\mathcal{P}_t = \{ p_1^t, \dots, p_{K_t}^t \}, \qquad \tilde{I}_t \triangleq I_t \oplus \mathcal{P}_t, \tag{1}$$

where $t \in \{1, \dots, T\}$ indexes frames, K_t is the number of instances in frame t, and \oplus denotes overlaying the visual prompts onto the frame I_t , yielding the augmented sequence $\tilde{\mathcal{V}} = \{\tilde{I}_1, \dots, \tilde{I}_T\}$.

To control memory consumption, we constrain each video to approximately $R=1.6\times 10^6$ pixels in total. Concretely, for a video $\mathcal V$ with frame resolution $H\times W$ and duration D seconds, we resize frames to $H'\times W'\approx R/(2D)$, where frames are uniformly sampled at 2 FPS. For example, a 30-second video yields 60 frames, each with a resolution of about $96\times 96\times 3$. Finally, the sequence of visual prompt–augmented frames $\tilde{\mathcal V}$ and a textual query q are fed into a VLM π_θ , which jointly predicts the temporal interval $[t_s,t_e]$ and the corresponding object identifier \imath .

3.2 OBJECT-CENTRIC PROMPTED VIDEO CONSTRUCTION

Data format. Each sample is denoted as $\{\mathcal{V}, q, P, M, A\}$, where $P = \{\mathcal{P}_t\}_{t=1}^T$ represents the set of visual prompts over frames, M is the segmentation mask database, and A is the ground-truth answer, defined as the target object ID. Concretely, M stores for each frame I_t a set of instance IDs paired with their run-length encoded masks (Golomb, 1966). For consistency with the ground-truth annotations, each mask m_k^t is further converted into its corresponding bounding box b_k^t .

To formally derive A, we establish a frame-level correspondence between the ground truth and candidate bounding boxes. For each frame I_t , we compute the IoU between the ground-truth g_t and all candidate bounding boxes $\{b_k^t\}_{k=1}^{K_t}$, and assign to frame t the ID i_t with the highest overlap:

$$i_t = \arg \max_{k \in \{1, \dots, K_t\}} \text{IoU}(g_t, b_k^t). \tag{2}$$

Over the entire video V, the final answer A is obtained by majority voting:

$$A = \arg\max_{i} \sum_{t=1}^{T} \mathbf{1}[i_t = i], \tag{3}$$

where $1[\cdot]$ denotes the indicator function. This defines the target object as the identifier with the highest overall IoU consistency across the video.

Data generation pipeline. To construct object-centric visual prompted videos, we integrate several existing vision models into a unified pipeline. The first frame I_1 of each video is processed by an off-the-shelf object detector to produce bounding boxes $\{b_k^1\}_{k=1}^{K_1}$ for all candidate instances across

COCO categories. These detections serve as prompts for SAM2, which generates high-quality segmentation masks $\{m_k^1\}_{k=1}^{K_1}$ that are then propagated to subsequent frames via tracking. To capture newly appearing or previously missed objects, periodic re-detection with IoU-based matching is performed. For each mask m_k^t , we embed a compact visual prompt p_k^t at its centroid (x_k^t, y_k^t) .

Importantly, although the COCO taxonomy does not fully cover all categories present in the videos, the detector can still provide bounding boxes for nearly all instances. For example, while fish is absent from the COCO label set, such instances are nevertheless detected under alternative categories. These semantic misclassifications do not affect our framework, as supervision depends only on consistent instance identities rather than precise class labels.

Data source. Two widely adopted STVG datasets are used for training. HCSTVG (Tang et al., 2021) focuses on human-centric grounding data. We merge the training splits of v1 and v2, and remove any samples that appear in the validation or test sets. VidSTG (Zhang et al., 2020) covers both humans and objects with diverse query types, providing both visual and linguistic diversity.

3.3 ENHANCING VLMs WITH REINFORCEMENT LEARNING

Since dense per-frame prediction is reformulated as a compact instance-level identification task, reinforcement learning can be directly applied to optimize the policy model with task-specific rewards. These identifiers further enable the model to produce more precise and interpretable reasoning chains during RL training, leading to more coherent spatial—temporal predictions.

Reward modeling. Building on DeepSeek-R1 (Guo et al., 2025), the reward design in STVG-R1 integrates both accuracy and format components. The accuracy reward measures the correctness of predictions, while the format reward enforces structural compliance with a predefined reasoning template. To capture both temporal and spatial accuracy, the accuracy reward is further decomposed into a temporal IoU reward and a spatial consistency reward. The temporal IoU reward quantifies the overlap between the predicted interval $[t_s, t_e]$ and the ground-truth segment $[t_s', t_e']$, defined as:

$$r_t(o) = \frac{[t_s, t_e] \cap [t'_s, t'_e]}{[t_s, t_e] \cup [t'_s, t'_e]},\tag{4}$$

where $A \cap B$ and $A \cup B$ denote the intersection and union of intervals A and B, respectively.

The spatial consistency reward verifies whether the predicted object ID is correct and appears within the localized temporal segment:

$$r_s(o) = \begin{cases} 1, & \text{if } i = i^* \text{ and } i \text{ appears in } [t_s, t_e], \\ 0, & \text{otherwise,} \end{cases}$$
 (5)

where i and i^* denote the predicted and ground-truth object ID. This design is consistent with the vIoU metric in STVG, defined as $|P_u|^{-1}\sum_{t\in P_i}\operatorname{IoU}(b_t,b_t^*)$, where P_i and P_u are the intersection and union of the predicted and ground-truth temporal segments, and b_t are the predicted and ground-truth bounding boxes at frame t. Since vIoU jointly evaluates temporal and spatial accuracy, constraining the predicted ID to fall within the localized segment prevents trivial solutions and mitigates overfitting to dataset-specific temporal patterns, improving optimization stability.

Beyond accuracy, the format reward $r_f(o)$ enforces compliance with the predefined reasoning structure, encouraging the model to explicitly generate its reasoning process. A value of 1 is assigned only if the response encloses the reasoning within <think>...</think> and the final prediction within <answer>...</answer>. Reasoning traces with timestamps and instance IDs provide clearer references and more precise grounding.

The overall reward is the sum of the three components:

$$R(o) = r_t(o) + r_s(o) + r_f(o).$$
 (6)

3.4 Training Strategies

The training objective is to optimize the policy model π_{θ} with GRPO (Guo et al., 2025), which has shown strong effectiveness in tasks with well-defined evaluation signals. Given a video–text query pair (\tilde{V}, q) sampled from the training distribution \mathcal{D} , the model generates n candidate responses

 $o = \{o_1, \dots, o_n\}$, each assigned a reward $R(o_i)$ as defined in Equation 6. In our experiments, n is set to 8. To normalize rewards within a group, the advantage A_i of each response is computed as:

$$A_i = \frac{R(o_i) - \text{mean}(\{R(o_j)\}_{j=1}^n)}{\text{std}(\{R(o_j)\}_{j=1}^n)}.$$
 (7)

The policy update objective encourages the current policy π_{θ} to assign higher probabilities to responses with larger normalized advantages, relative to the previous policy $\pi_{\theta_{old}}$. Formally, the optimization objective is defined as:

$$\mathcal{J}_{GRPO}(\theta) = \mathbb{E}_{(\tilde{\mathcal{V}},q) \sim \mathcal{D}, \{o_i\}_{i=1}^n \sim \pi_{\theta_{\text{old}}}(\cdot|q)} \\
\left[\frac{1}{n} \sum_{i=1}^n \left(\min\left(\frac{\pi_{\theta}(o_i|q)}{\pi_{\theta_{\text{old}}}(o_i|q)} A_i, \operatorname{clip}\left(\frac{\pi_{\theta}(o_i|q)}{\pi_{\theta_{\text{old}}}(o_i|q)}, 1 - \epsilon, 1 + \epsilon \right) A_i \right) - \beta D_{KL}(\pi_{\theta} \| \pi_{\text{ref}}) \right) \right], \quad (8)$$

 where ϵ is the clipping parameter, β controls the strength of KL regularization, and π_{ref} denotes the frozen reference policy. The clipping term prevents excessively large updates, while the KL penalty constrains policy drift, together stabilizing optimization.

4 EXPERIMENTS

4.1 **SETTING**

4.1 SETTIN

Implementation details. We employ the Qwen2.5-VL-7B (Bai et al., 2025) as the pre-trained model. We use AdamW (Loshchilov & Hutter, 2017) optimizer with a linear learning rate scheduler. The learning rate is 1.0e-6 and the batch size is 1 per device. The object detector used during our training and evaluation is yolov12 (Tian et al., 2025). The model is trained for 1 epoch on our object-centric visual prompting dataset, and all experiments are conducted on $8 \times A100$ GPUs.

Benchmarks. For STVG, HCSTVG-v1 and HCSTVG-v2 (Tang et al., 2021) are widely used for human-centric grounding, while ST-Align (Li et al., 2025) extends evaluation to both humans and objects and supports spatial video grounding (SVG). To capture fine-grained spatial understanding, MeViS (Ding et al., 2023) evaluates mask-level grounding under complex multi-object scenarios. Beyond STVG and SVG, we also consider video temporal grounding (VTG) with Charades-STA (Gao et al., 2017) and TVGBench (Wang et al., 2025b) to evaluate generalization.

Evaluation metrics. For STVG, following (Yang et al., 2022; Gu et al., 2024), we report m_tIoU for temporal localization accuracy and m_vIoU, vIoU@R for joint spatial—temporal grounding quality. For VTG, we adopt m_tIoU and tIoU@R. For mask-level referring video object segmentation, \mathcal{J} is used to assess region similarity and \mathcal{F} to measure contour accuracy.

Table 1: Performance comparison with state-of-the-art models on HCSTVG-v1 *test* set and HCSTVG-v2 *val* set (%). The results of GroundingGPT-7B are reported from SpaceVLLM, while those of InternVL3-8B, Qwen2.5-VL-7B and Qwen2.5-VL-72B are generated by our experiments. The best and second-best results are shown in **bold** and underlined.

Models		HCS'	ΓVG-v1		HCSTVG-v2			
	m_tIoU	m_vIoU	vIoU@0.3	vIoU@0.5	m_tIoU	m_vIoU	vIoU@0.3	vIoU@0.5
TubeDETR	-	32.4	49.8	23.5	53.9	36.4	58.8	30.6
STVGFormer	-	36.9	62.2	34.8	58.1	38.7	65.5	33.8
CG-STVG	52.8	38.4	61.5	36.3	60.0	39.5	64.5	36.3
TA-STVG	53.0	<u>39.1</u>	63.1	36.8	<u>60.4</u>	40.2	<u>65.8</u>	<u>36.7</u>
GroundingGPT-7B	22.2	16.7	15.0	4.9	19.6	14.7	16.6	3.1
SpaceVLLM-7B	56.9	39.3	66.6	36.9	58.0	34.0	56.9	24.7
InternVL3-8B	22.6	11.7	15.3	2.8	24.9	12.8	14.2	3.2
+VisualPrompt	22.9 \(\dagger 0.3	$13.8 \uparrow + 2.1$	$18.9 \uparrow +3.6$	$4.2 \uparrow +1.4$	25.0 \(\psi + 0.1\)	$15.4 \uparrow + 2.6$	18.1 ↑+3.9	$4.5 \uparrow +1.3$
Qwen2.5-VL-7B	40.3	19.7	28.2	7.9	45.1	19.3	26.0	8.2
+VisualPrompt	38.7 \1.6	24.8 \(\pm\)+5.1	40.7 ↑+12.5	13.4 ↑+5.5	44.7 ↓ 0.4	19.5 \(\phi+0.2\)	28.7 ↑+2.7	$10.9 \uparrow + 2.7$
Qwen2.5-VL-72B	40.7	23.9	37.0	15.1	43.9	23.4	36.1	13.4
+VisualPrompt	38.8 \1.9	26.0 \(\pmu+2.1\)	43.0 ↑+6.0	15.2 ↑+0.1	42.0 ↓1.9	27.3 \(\pmu+3.9\)	43.5 \(\pm\)+7.4	16.3 \(\pmu+2.9\)
STVG-R1	56.9	<u>39.1</u>	66.7	38.6	62.0	40.2	67.8	38.8

Table 2: Performance comparison with state-of-the-art models on ST-Align benchmark (%). The results of Qwen2.5-VL-7B are generated by our experiments.

Models	Spati	ial-Temporal	Video Groun	Video Spatial Grounding			
Wildelis	tIoU@0.5	m_tIoU	vIoU@0.5	m_vIoU	vIoU@0.3	vIoU@0.5	m_vIoU
GroundingGPT-7B	7.1	12.2	2.9	9.2	19.7	5.4	17.9
VTimeLLM-7B	7.1	15.5	-	-	-	-	-
Grounded-VideoLLM-7B	30.0	33.0	-	-	-	-	-
LLava-ST-7B	44.6	43.8	21.1	22.8	47.2	30.9	<u>32.5</u>
Qwen2.5-VL-7B	35.2	37.4	$\overline{17.1}$	14.3	44.6	39.5	35.5
+VisualPrompt	36.0 ↑+0.8	38.3 ↑+0.9	21.5 ↑+4.4	19.5 \+5.2	57.7 ↑+13.1	51.4 ↑+11.9	46.6 ↑+11.1
STVG-R1	43.6	45.1	25.9	23.4	60.3	53.9	48.6

4.2 EVALUATION RESULTS ON SPATIAL TEMPORAL VIDEO GROUNDING

Table 1 and Table 2 present results on HCSTVG-v1/v2 and ST-Align. TubeDETR (Yang et al., 2022), STVGFormer (Lin et al., 2023), CG-STVG (Gu et al., 2024), and TA-STVG (Gu et al., 2025) are four VLP-based specialized models. InternVL3-8B (Zhu et al., 2025) and Qwen2.5-VL-7B/72B (Bai et al., 2025) first perform temporal grounding to predict the frame range, and then apply spatial grounding on frames within the intersection of predicted b_t and ground-truth b_t^* for evaluation.

Zero-shot. The object-centric visual prompting paradigm outperforms the two-stage evaluation across InternVL3-8B, Qwen2.5-VL-7B and Qwen2.5-VL-72B, achieving m_vIoU scores of 15.4%, 19.5%, and 27.3% on HCSTVG-v2, respectively. The improvement can be attributed to the ability of our paradigm to leverage information from the entire video sequence when generating spatial predictions. However, temporal performance slightly declines for Qwen2.5-VL models due to occlusion of fine-grained details and distributional shifts introduced by visual prompts.

Fine-tuning. Reinforcement learning yields substantial gains in both temporal and spatial performance, establishing new state-of-the-art results on HCSTVG-v1, HCSTVG-v2, and ST-Align. On HCSTVG-v2, compared with the strongest SFT-trained VLM model SpaceVLLM, STVG-R1 achieves absolute improvements of 4.0%, 6.2%, 10.9% and 14.1% across four evaluation metrics. As shown in Table 2, STVG-R1 also surpasses the strongest ST-Align model LLaVA-ST by +0.6% on m_vIoU. These spatial gains highlight the effectiveness of our object-centric visual prompting paradigm in enforcing consistent object-level predictions, while reinforcement learning further enhances reasoning ability, leading to more coherent spatial—temporal video grounding.

4.3 EVALUATION RESULTS ON VIDEO SPATIAL GROUNDING

Since vIoU in STVG is inevitably affected by temporal prediction quality, we further evaluate video spatial grounding to isolate spatial capability. As shown in Table 2, the proposed object-centric visual prompting paradigm achieves a notable zero-shot gain of 11.1% on m_vIoU on ST-Align video spatial grounding. And after RL, STVG-R1 surpasses the second-best model LLaVA-ST by 13.1% on m_vIoU. More importantly, Table 3 reports the results on the multi-object referring video object segmentation task. STVG-R1 sets a new state-of-

Table 3: Performance comparison with state-of-theart models on MeViS (%). The results of TrackGPT are generated by VISA.

Models	$\mid J \mid$	F	J&F
URVOS (Seo et al., 2020) MTTR (Botach et al., 2022) ReferFormer (Wu et al., 2022) LMPM (Ding et al., 2023)	28.8 29.8	32.2	27.8 30.0 31.0 37.2
LISA (Lai et al., 2024) TrackGPT (Stroh, 2024) VISA (Yan et al., 2024) VideoGlaMM (Munasinghe et al., 2025)	37.6 40.7	42.6 46.3	43.5
STVG-R1	44.7	50.0	47.3

the-art of 47.3% on $\mathcal{J}\&\mathcal{F}$ on MeViS, despite being trained only on single-object STVG data. This demonstrates the strong generalization ability of our visual prompting paradigm, where the simplified identifier-based formulation facilitates transfer to more complex multi-object scenarios.

4.4 EVALUATION RESULTS ON VIDEO TEMPORAL GROUNDING

We further evaluate STVG-R1 on out-of-distribution video temporal grounding benchmarks. As shown in Table 4, STVG-R1 achieves the best zero-shot performance on Charades-STA, surpassing the second-best model LLaVA-ST by +7.7% at tIoU@0.5. Although slightly below the task-specific Time-R1, STVG-R1 achieves competitive results on TVGBench, highlighting strong generalization.

Table 4: Performance comparison with state-of-the-art models on Charades-STA and TVGBench (%). The results marked with * represent models training on corresponding dataset, while others indicate zero-shot settings.

Models	Charades-STA		TVGBench	
	tIoU@0.3	tIoU@0.5	tIoU@0.3	tIoU@0.5
TimeSuite (Zeng et al., 2024)	69.9	48.7	31.1	18.0
TRACE (Guo et al., 2024)	-	40.3	37.0	25.5
LLaVA-ST (Li et al., 2025)	$\frac{63.1}{78.1^*}$	$\frac{44.8}{60.8^*}$	-	-
Time-R1 (Wang et al., 2025b)	78.1**	60.8**	41.8	29.4
STVG-R1	73.2	52.5	42.5	<u>27.4</u>

4.5 ABLATION

Ablation on visual prompt design. Following prior work (Cai et al., 2024; Shtedritski et al., 2023), red-colored visual prompts consistently yield superior performance in number identification. As shown in Table 5, reducing the font size improves temporal grounding accuracy, since large prompts obscure fine-grained video details. However, when the size is reduced to 10, spatial accuracy drops sharply. Regarding prompt types, uppercase and lowercase letters achieve stronger temporal grounding than numbers, likely because letters are always single characters, whereas numbers

Table 5: Ablation study on visual prompt designs on HCSTVG-v1 with zero-shot Qwen2.5-VL-7B. U-Letters denotes uppercase letters, L-Letters denotes lowercase letters, and Mix refers to a combination of numbers and uppercase letters.

Size	Type	m_tIoU	m_vIoU	vIoU@0.3	vIoU@0.5
10	Number	38.1	24.6	39.4	12.0
20	Number		24.9	40.6	12.2
30	Number	37.5	24.1	38.9	11.8
40	Number	37.4	23.2	36.4	11.6
20	U-Letters	39.0	24.4	38.0	12.6
20	L-Letters	38.7	24.0	37.4	12.1
20	Mix	38.7	15.7	20.0	5.7

greater than 9 occupy more space and obscure details. Nevertheless, spatial accuracy with letters is consistently lower than with numbers. Motivated by this, we tested a mixed type where numbers greater than 9 are mapped to letters. However, this design further degrades spatial accuracy, suggesting that simple and consistent prompts are more effective. Based on these findings, red-colored numbers with font size 20 are adopted as the default prompt design for all experiments.

Ablation on mask filtering thresholds. To reduce visual clutter from dense prompts, we apply mask filtering that removes small instances whose size falls below a fraction of the maximum mask within each category per frame. As shown in Table 6, higher thresholds θ degrade **data quality**, with m_vIoU dropping to 65.1% at 1/2 on HCSTVG-v1. In contrast, **zero-shot** evaluation with Qwen2.5-VL-7B shows that moderate filtering improves spatial grounding while maintaining temporal accu-

Table 6: Experimental results of mask filtering thresholds on HCSTVG-v1. Values before '/' denote the upper bound, and those after '/' are zero-shot results with Qwen2.5-VL-7B.

θ	m_tIoU	m_vIoU	vIoU@0.3	vIoU@0.5
0	100.0/37.5 100.0/38.0 100.0/38.0 100.0/38.1	69.1/23.3	97.2/37.4	89.9/11.9
1/4	100.0/38.0	68.3/24.6	95.8/40.5	88.5/11.6
1/3	100.0/38.0	67.7/24.9	94.6/40.6	87.6/12.1
1/2	100.0/38.1	65.1/24.1	89.9/38.2	83.5/11.4

racy. A threshold of 1/3 achieves the best trade-off between data quality and zero-shot performance, indicating that many small-scale objects are not semantically salient and may even introduce noise.

Ablation on our modules. We further conduct ablation studies to explore the individual contributions of object-centric visual prompting paradigm and reinforcement learning. Without visual prompts, GRPO follows the zero-shot two-stage evaluation and is optimized only with the temporal

Table 7: Ablation study with different modules on HCSTVG-v1 and HCSTVG-v2.

Models	HCSTVG-v1				HCSTVG-v2			
1110 0013	m_tIoU	m_vIoU	vIoU@0.3	vIoU@0.5	m_tIoU	m_vIoU	vIoU@0.3	vIoU@0.5
Qwen2.5-VL-7B	40.3	19.7	28.2	7.9	45.1	19.3	26.0	8.2
+VisualPrompt +GRPO	38.7 57.5	24.8 24.7	40.7 37.8	13.4 17.6	44.7 61.4	19.2 24.2	28.7 37.7	10.9 15.4
+VisualPrompt-SFT +VisualPrompt-GRPO	50.9 56.9	34.3 39.1	60.2 66.7	28.0 38.6	54.4 62.0	36.5 40.2	60.8 67.8	31.3 38.8

Table 8: Ablation study with different modules on ST-Align.

Models	Spatial	-Temporal	Video Grou	Spatial Video Grounding			
1,100010	tIoU@0.5	m_tIoU	vIoU@0.5	m_vIoU	vIoU@0.3	vIoU@0.5	m_vIoU
Qwen2.5-VL-7B	35.2	37.4	17.1	14.3	44.6	39.5	35.5
+VisualPrompt	36.0	38.3	21.5	19.5	57.7	51.4	46.6
+GRPO	41.8	43.7	17.3	20.0	-	-	-
+VisualPrompt-SFT	34.6	36.6	21.5	19.3	58.6	52.3	47.2
+VisualPrompt-GRPO	43.6	45.1	25.9	23.4	60.3	53.9	48.6

reward. As shown in Table 7 and Table 8, visual prompts primarily enhance spatial localization, while GRPO substantially improves temporal accuracy. VisualPrompt-SFT improves all metrics but slightly reduces temporal grounding on ST-Align, where reasoning is critical. The combination of visual prompt and GRPO yields the most consistent gains, achieving state-of-the-art performance.

4.6 VISUALIZATION

In Figure 4, we present a case of spatial—temporal video grounding with our object-centric prompting paradigm. The model first identifies the object IDs relevant to the query and then determines the temporal boundaries. During the reasoning process, complex descriptive appearance expressions are compactly mapped into object IDs, facilitating precise instance-level reasoning and grounding.



Question: Each object in the video is marked with a red number at its center.

To accurately pinpoint the event "[Query]" in the video:

1.Determine the precise time period of the event occurs. 2.Identify which object ID is corresponding to the described event. Output thought process within the <think> </think>, including both a temporal analysis and a spatial analysis. Finally, provide the start and end times, and object ID in the format "Target ID: [ID], Time range: [start time to end time]" within the <answer> </answer> tags.

Reasoning: < think > To determine the event "The curly man in a light gray suit walks towards the man in the red suit and stretches his left hand to rest on the left shoulder of the man," I need to identify the objects involved:

- The curly man in a light gray suit: Object ID 2. - The man in the red suit: Object ID 3.

The event happens when Object ID 2 approaches Object ID 3 and extends their left hand to touch the left shoulder of Object ID 3. I need to analyze the sequence of events in the video clips.

1. The curly man in a light gray suit (Object ID 2) is initially seen standing still. 2. The man in the red suit (Object ID 1) is also standing still. 3. The curly man in a light gray suit begins to walk towards the man in the red suit. 4. As he approaches, the curly man in a light gray suit extends his left hand and places it on the left shoulder of the man in the red suit.

Based on this analysis, - The event starts around 5.00 seconds when the curly man in a light gray suit begins to walk towards the man in the red suit. - The event ends around 11.00 seconds when the curly man in a light gray suit places his hand on the left shoulder of the man in the red suit.

<answer> Target ID: 2, Time range: 5.00 to 11.00 </answer>

Figure 4: Case study of STVG-R1 on the spatial-temporal video grounding task.

5 CONCLUSION

This work addresses challenges of coordinates visual—textual misalignment and instance prediction inconsistency across videos. We propose an object-centric visual prompting paradigm that reformulates per-frame coordinate prediction into a compact and interpretable instance-level identification problem. We further introduce STVG-R1, a reinforcement learning framework optimized with task-driven rewards. Experiments across six benchmarks demonstrate the effectiveness of compact visual prompts and reinforcement learning in enhancing reasoning consistency and generalization. Future work will extend our detector-based framework from natural images to broader visual domains.

6 REPRODUCIBILITY STATEMENT

We make every effort to ensure the reproducibility of our work. Detailed descriptions of the model architecture, training pipeline, training datasets, and reward design for STVG-R1 are provided in Section 3. Implementation details are reported in Section 4.1. The design of visual prompts and filtering thresholds is described in Section 4.5, and the prompts used for training and evaluation across different tasks are presented in Section A.1.

REFERENCES

- Marah Abdin, Jyoti Aneja, Harkirat Behl, Sébastien Bubeck, Ronen Eldan, Suriya Gunasekar, Michael Harrison, Russell J Hewett, Mojan Javaheripi, Piero Kauffmann, et al. Phi-4 technical report. *arXiv preprint arXiv:2412.08905*, 2024.
- Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibo Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, et al. Qwen2. 5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025.
- Adam Botach, Evgenii Zheltonozhskii, and Chaim Baskin. End-to-end referring video object segmentation with multimodal transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 4985–4995, 2022.
- Mu Cai, Haotian Liu, Siva Karthik Mustikovela, Gregory P Meyer, Yuning Chai, Dennis Park, and Yong Jae Lee. Vip-llava: Making large multimodal models understand arbitrary visual prompts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 12914–12923, 2024.
- Joao Carreira and Andrew Zisserman. Quo vadis, action recognition? a new model and the kinetics dataset. In *proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 6299–6308, 2017.
- Liang Chen, Lei Li, Haozhe Zhao, Yifan Song, and Vinci. R1-v: Reinforcing super generalization ability in vision-language models with less than \$3. https://github.com/Deep-Agent/R1-V, 2025a. Accessed: 2025-02-02.
- Yukang Chen, Fuzhao Xue, Dacheng Li, Qinghao Hu, Ligeng Zhu, Xiuyu Li, Yunhao Fang, Haotian Tang, Shang Yang, Zhijian Liu, et al. Longvila: Scaling long-context visual language models for long videos. *arXiv preprint arXiv:2408.10188*, 2024.
- Yukang Chen, Wei Huang, Baifeng Shi, Qinghao Hu, Hanrong Ye, Ligeng Zhu, Zhijian Liu, Pavlo Molchanov, Jan Kautz, Xiaojuan Qi, et al. Scaling rl to long videos. *arXiv preprint arXiv:2507.07966*, 2025b.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 conference of the North American chapter of the association for computational linguistics: human language technologies, volume 1 (long and short papers)*, pp. 4171–4186, 2019.
- Henghui Ding, Chang Liu, Shuting He, Xudong Jiang, and Chen Change Loy. Mevis: A large-scale benchmark for video segmentation with motion expressions. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 2694–2703, 2023.
- Kaituo Feng, Kaixiong Gong, Bohao Li, Zonghao Guo, Yibing Wang, Tianshuo Peng, Junfei Wu, Xiaoying Zhang, Benyou Wang, and Xiangyu Yue. Video-r1: Reinforcing video reasoning in mllms. *arXiv preprint arXiv:2503.21776*, 2025.
- Chaoyou Fu, Yuhan Dai, Yongdong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 24108–24118, 2025.

- Jiyang Gao, Chen Sun, Zhenheng Yang, and Ram Nevatia. Tall: Temporal activity localization via language query. In *Proceedings of the IEEE international conference on computer vision*, pp. 5267–5275, 2017.
 - Solomon Golomb. Run-length encodings (corresp.). *IEEE transactions on information theory*, 12 (3):399–401, 1966.
 - Xin Gu, Heng Fan, Yan Huang, Tiejian Luo, and Libo Zhang. Context-guided spatio-temporal video grounding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 18330–18339, 2024.
 - Xin Gu, Yaojie Shen, Chenxi Luo, Tiejian Luo, Yan Huang, Yuewei Lin, Heng Fan, and Libo Zhang. Knowing your target: Target-aware transformer makes better spatio-temporal video grounding. *arXiv preprint arXiv:2502.11168*, 2025.
 - Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
 - Yongxin Guo, Jingyu Liu, Mingda Li, Qingbin Liu, Xi Chen, and Xiaoying Tang. Trace: Temporal grounding video llm via causal event modeling. *arXiv preprint arXiv:2410.05643*, 2024.
 - Aaron Jaech, Adam Kalai, Adam Lerer, Adam Richardson, Ahmed El-Kishky, Aiden Low, Alec Helyar, Aleksander Madry, Alex Beutel, Alex Carney, et al. Openai o1 system card. *arXiv* preprint arXiv:2412.16720, 2024.
 - Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. Lisa: Reasoning segmentation via large language model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9579–9589, 2024.
 - Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Peiyuan Zhang, Yanwei Li, Ziwei Liu, et al. Llava-onevision: Easy visual task transfer. *arXiv preprint arXiv:2408.03326*, 2024.
 - Hongyu Li, Jinyu Chen, Ziyu Wei, Shaofei Huang, Tianrui Hui, Jialin Gao, Xiaoming Wei, and Si Liu. Llava-st: A multimodal large language model for fine-grained spatial-temporal understanding. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 8592– 8603, 2025.
 - Ji Lin, Hongxu Yin, Wei Ping, Pavlo Molchanov, Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 26689–26699, 2024.
 - Zihang Lin, Chaolei Tan, Jian-Fang Hu, Zhi Jin, Tiancai Ye, and Wei-Shi Zheng. Stygformer: Spatio-temporal video grounding with static-dynamic cross-modal understanding. In *Proceedings of the 4th on Person in Context Workshop*, pp. 1–5, 2022.
 - Zihang Lin, Chaolei Tan, Jian-Fang Hu, Zhi Jin, Tiancai Ye, and Wei-Shi Zheng. Collaborative static and dynamic vision-language streams for spatio-temporal video grounding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 23100–23109, 2023.
 - Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 26296–26306, 2024a.
 - Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Qing Jiang, Chunyuan Li, Jianwei Yang, Hang Su, et al. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. In *European conference on computer vision*, pp. 38–55. Springer, 2024b.
 - Ziyu Liu, Zeyi Sun, Yuhang Zang, Xiaoyi Dong, Yuhang Cao, Haodong Duan, Dahua Lin, and Jiaqi Wang. Visual-rft: Visual reinforcement fine-tuning. *arXiv preprint arXiv:2503.01785*, 2025.

- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint* arXiv:1711.05101, 2017.
 - Shehan Munasinghe, Hanan Gani, Wenqi Zhu, Jiale Cao, Eric Xing, Fahad Shahbaz Khan, and Salman Khan. Videoglamm: A large multimodal model for pixel-level visual grounding in videos. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 19036–19046, 2025.
 - Zhangyang Qi, Zhixiong Zhang, Ye Fang, Jiaqi Wang, and Hengshuang Zhao. Gpt4scene: Understand 3d scenes from videos with vision-language models. *arXiv preprint arXiv:2501.01428*, 2025.
 - Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pp. 8748–8763. PmLR, 2021.
 - Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, Eric Mintun, Junting Pan, Kalyan Vasudev Alwala, Nicolas Carion, Chao-Yuan Wu, Ross Girshick, Piotr Dollár, and Christoph Feichtenhofer. Sam 2: Segment anything in images and videos. *arXiv preprint arXiv:2408.00714*, 2024. URL https://arxiv.org/abs/2408.00714.
 - Seonguk Seo, Joon-Young Lee, and Bohyung Han. Urvos: Unified referring video object segmentation network with a large-scale benchmark. In *European conference on computer vision*, pp. 208–223. Springer, 2020.
 - Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
 - Haozhan Shen, Peng Liu, Jingcheng Li, Chunxin Fang, Yibo Ma, Jiajia Liao, Qiaoli Shen, Zilun Zhang, Kangjia Zhao, Qianqian Zhang, et al. Vlm-r1: A stable and generalizable r1-style large vision-language model. *arXiv preprint arXiv:2504.07615*, 2025.
 - Aleksandar Shtedritski, Christian Rupprecht, and Andrea Vedaldi. What does clip know about a red circle? visual prompt engineering for vlms. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 11987–11997, 2023.
 - Nicholas Stroh. Trackgpt–a generative pre-trained transformer for cross-domain entity trajectory forecasting. *arXiv preprint arXiv:2402.00066*, 2024.
 - Ye Sun, Hao Zhang, Henghui Ding, Tiehua Zhang, Xingjun Ma, and Yu-Gang Jiang. Sama: Towards multi-turn referential grounded video chat with large language models. *arXiv* preprint arXiv:2505.18812, 2025.
 - Zongheng Tang, Yue Liao, Si Liu, Guanbin Li, Xiaojie Jin, Hongxu Jiang, Qian Yu, and Dong Xu. Human-centric spatio-temporal video grounding with visual transformers. *IEEE Transactions on Circuits and Systems for Video Technology*, 32(12):8238–8249, 2021.
 - Yunjie Tian, Qixiang Ye, and David Doermann. Yolov12: Attention-centric real-time object detectors. *arXiv preprint arXiv:2502.12524*, 2025.
 - Jiankang Wang, Zhihan Zhang, Zhihang Liu, Yang Li, Jiannan Ge, Hongtao Xie, and Yongdong Zhang. Spacevllm: Endowing multimodal large language model with spatio-temporal video grounding capability. *arXiv preprint arXiv:2503.13983*, 2025a.
 - Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model's perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024a.
 - Weihan Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Song XiXuan, et al. Cogvlm: Visual expert for pretrained language models. *Advances in Neural Information Processing Systems*, 37:121475–121499, 2024b.

- Ye Wang, Ziheng Wang, Boshen Xu, Yang Du, Kejun Lin, Zihan Xiao, Zihao Yue, Jianzhong Ju, Liang Zhang, Dingyi Yang, et al. Time-r1: Post-training large vision language model for temporal video grounding. *arXiv preprint arXiv:2503.13377*, 2025b.
- Yi Wang, Kunchang Li, Xinhao Li, Jiashuo Yu, Yinan He, Guo Chen, Baoqi Pei, Rongkun Zheng, Zun Wang, Yansong Shi, et al. Internvideo2: Scaling foundation models for multimodal video understanding. In *European Conference on Computer Vision*, pp. 396–416. Springer, 2024c.
- Jiannan Wu, Yi Jiang, Peize Sun, Zehuan Yuan, and Ping Luo. Language as queries for referring video object segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 4974–4984, 2022.
- Bin Xiao, Haiping Wu, Weijian Xu, Xiyang Dai, Houdong Hu, Yumao Lu, Michael Zeng, Ce Liu, and Lu Yuan. Florence-2: Advancing a unified representation for a variety of vision tasks. *arXiv* preprint arXiv:2311.06242, 2023.
- Cilin Yan, Haochen Wang, Shilin Yan, Xiaolong Jiang, Yao Hu, Guoliang Kang, Weidi Xie, and Efstratios Gavves. Visa: Reasoning video object segmentation via large language models. In *European Conference on Computer Vision*, pp. 98–115. Springer, 2024.
- Antoine Yang, Antoine Miech, Josef Sivic, Ivan Laptev, and Cordelia Schmid. Tubedetr: Spatiotemporal video grounding with transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 16442–16453, 2022.
- Jianwei Yang, Hao Zhang, Feng Li, Xueyan Zou, Chunyuan Li, and Jianfeng Gao. Set-of-mark prompting unleashes extraordinary visual grounding in gpt-4v, 2023. *URL https://arxiv.org/abs/2310.11441*, 3, 2024.
- Jihan Yang, Shusheng Yang, Anjali W Gupta, Rilyn Han, Li Fei-Fei, and Saining Xie. Thinking in space: How multimodal large language models see, remember, and recall spaces. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pp. 10632–10643, 2025.
- Hanrong Ye, De-An Huang, Yao Lu, Zhiding Yu, Wei Ping, Andrew Tao, Jan Kautz, Song Han, Dan Xu, Pavlo Molchanov, et al. X-vila: Cross-modality alignment for large language model. *arXiv* preprint arXiv:2405.19335, 2024.
- Haobo Yuan, Xiangtai Li, Tao Zhang, Zilong Huang, Shilin Xu, Shunping Ji, Yunhai Tong, Lu Qi, Jiashi Feng, and Ming-Hsuan Yang. Sa2va: Marrying sam2 with llava for dense grounded understanding of images and videos. *arXiv* preprint arXiv:2501.04001, 2025.
- Xiangyu Zeng, Kunchang Li, Chenting Wang, Xinhao Li, Tianxiang Jiang, Ziang Yan, Songze Li, Yansong Shi, Zhengrong Yue, Yi Wang, et al. Timesuite: Improving mllms for long video understanding via grounded tuning. *arXiv preprint arXiv:2410.19702*, 2024.
- Jingyi Zhang, Jiaxing Huang, Huanjin Yao, Shunyu Liu, Xikun Zhang, Shijian Lu, and Dacheng Tao. R1-vl: Learning to reason with multimodal large language models via step-wise group relative policy optimization. *arXiv preprint arXiv:2503.12937*, 2025.
- Yuanhan Zhang, Jinming Wu, Wei Li, Bo Li, Zejun Ma, Ziwei Liu, and Chunyuan Li. Video instruction tuning with synthetic data. *arXiv preprint arXiv:2410.02713*, 2024.
- Zhu Zhang, Zhou Zhao, Yang Zhao, Qi Wang, Huasheng Liu, and Lianli Gao. Where does it exist: Spatio-temporal video grounding for multi-form sentences. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 10668–10677, 2020.
- Jinguo Zhu, Weiyun Wang, Zhe Chen, Zhaoyang Liu, Shenglong Ye, Lixin Gu, Hao Tian, Yuchen Duan, Weijie Su, Jie Shao, et al. Internvl3: Exploring advanced training and test-time recipes for open-source multimodal models. *arXiv* preprint arXiv:2504.10479, 2025.

A APPENDIX

A.1 PROMPT FOR TRAINING AND EVALUATION

The prompt for spatial-temporal video grounding is shown in Figure 5.

Each object in the video is marked with a red number at its center.

To accurately pinpoint the event "[Query]" in the video:

- 1.Determine the precise time period of the event occurs.
- 2.Identify which object ID is corresponding to the described event.

Output thought process within the <think> </think>, including both temporal analysis and spatial analysis. Finally, provide the start and end times, and object ID in the format "Target ID: [ID], Time range: [start time to end time]" within the <answer> </answer> tags.

Figure 5: Prompt for spatial-temporal video grounding.

The prompt for video spatial grounding and referring video object segmentation is shown in Figure 6.

Each object in the video is marked with a red number at its center.

To accurately pinpoint the event "[Query]" in the video:

1. Identify which object ID is corresponding to the described event.

Output thought process within the <think> </think>, including spatial analysis. Finally, provide the object ID in the format "Target ID: [ID]" within the <answer> </answer> tags.

Figure 6: Prompt for video spatial grounding and referring video object segmentation.

The prompt for video temporal grounding is shown in Figure 7.

Each object in the video is marked with a red number at its center.

To accurately pinpoint the event "[Query]" in the video:

1.Determine the precise time period of the event occurs.

Output thought process within the <think> </think>, including temporal analysis. Finally, provide the start and end times in the format "Time range: [start time to end time]" within the <answer> </answer> tags.

Figure 7: Prompt for video temporal grounding.

A.2 VISUALIZATIONS OF DIFFERENT TASKS

We provide more cases of spatial-temporal video grounding and referring video object segmentation tasks, as presented in Figure 8 and Figure 9. Although some visual prompts are filtered out in certain frames, the corresponding instances remain stored in the mask database, thereby enhancing the final spatial localization capability.



Query: The blue man walks a few steps forward as he speaks, and then sits down.

Reasoning: <think> To determine the event "The blue man walks a few steps forward as he speaks, and then sits down," I need to identify the blue man first. The blue man is object ID 4. He wears a blue robe and a black hat. In the video, the blue man starts by standing still and then begins to walk forward while speaking. After walking a few steps, he stops and sits down on the ground. This sequence happens between 10.00 and 16.99 seconds.

<answer> Target ID: 4, Time range: 10.00 to 16.99 </answer>



Query: The woman in the gray dress turns and takes a step forward, looking back at the woman wearing a white headscarf, and then takes another step back, looking at the woman wearing a white headscarf.

Reasoning: <think> To determine the event "The woman in the gray dress turns and takes a step forward, looking back at the woman wearing a white headscarf, and then takes another step back, looking at the woman wearing a white headscarf," I need to analyze the sequence of actions:

- 1. The woman in the gray dress (ID 2) initially faces the woman in the white headscarf (ID 4).
- 2. She turns her body slightly towards the camera.
- 3. She takes a step forward while still facing the woman in the white headscarf.
- 4. She looks back at the woman in the white headscarf.
- 5. She takes another step back while still facing the woman in the white headscarf.

Based on this sequence, the event occurs between the moments when she turns her body and takes the first step forward until she takes the second step back.

Temporal Analysis:

- The event starts around 4.00 seconds when the woman in the gray dress turns her body.
- The event ends around 8.00 seconds when she takes the second step back.

Spatial Analysis:

- The woman in the gray dress (object ID 2) is the target object for the event. </think>

<answer> Target ID: 2, Time range: 4.00 to 8.00 </answer>

Figure 8: Cases for spatial-temporal video grounding.



Query: The birds inside the cage, continuously hopping around.

Reasoning: <think> To determine the event 'The birds inside the cage, continuously hopping around.', I need to observe the behavior of the birds in the video. The birds appear to be moving around the cage, which suggests they are hopping. The bird labeled as '1' seems to be more active, moving around the cage more frequently than the bird labeled as '2'. The bird labeled as '2' appears to be less active and mostly stationary.

<answer> Target ID: 1, 2 </answer>



Query: A cluster of wandering domesticated birds.

Reasoning: <a href="https://doi.org/10.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/jtm2.2007/j

<answer> Target ID: 1, 2, 3, 4, 5 </answer>



Query: The white pigeon that hasn't moved from its position.

Reasoning: <think> To determine the event 'The white pigeon that hasn't moved from its position,' I need to identify the white pigeon in the cage and observe if it remains stationary throughout the video. The white pigeon is located in the middle of the cage, and it appears to be the second pigeon from the left. It seems to be the only one that hasn't moved significantly compared to the others.

<answer> Target ID: 2 </answer>



Query: bigger one of the two planes moving left and landing.

Reasoning: <think> The event 'bigger one of the two planes moving left and landing' can be observed from the moment the plane starts descending towards the runway until it touches down. The plane labeled as '1' is the bigger one among the two planes. It is positioned on the right side of the frame and moves leftward as it lands./think>

<answer> Target ID: 1 </answer>

Figure 9: Cases for referring video object segmentation.

A.3 MORE EXPERIMENTS


Since video temporal grounding task does not inherently require object-centric visual prompts, their addition may even obscure fine-grained video details and slightly hinder temporal accuracy in the zero-shot setting. To further verify this, we compare STVG-R1 with and without visual prompts on Charades-STA and TVGBench. As shown in Table 9, visual prompts bring a marginal decrease in performance, indicating that visual prompts are not essential for temporal-only task.

Table 9: Comparison of STVG-R1 with and without visual prompts on temporal grounding benchmarks Charades-STA and TVGBench (%). Adding visual prompts slightly affects temporal performance, showing that object-centric prompts are less critical for temporal-only tasks.

Models	Charad	les-STA	TVGBench		
Models	tIoU@0.3	tIoU@0.5	tIoU@0.3	tIoU@0.5	
STVG-R1 w. visualprompt STVG-R1 w/o. visialprompt	72.2 73.2	52.1 52.5	41.8 42.5	27.2 27.4	

A.4 VISUALIZATIONS OF UNSEEN CATEGORY IN OBJECT DETECTOR

Figure 10 presents an example where the queried object (*fish*) is not included in the detector's taxonomy and is thus misclassified into an incorrect category (*bird*). Nevertheless, our framework assigns a consistent ID and correctly localizes the target instance. This demonstrates that category misclassification does not affect the effectiveness of our approach.

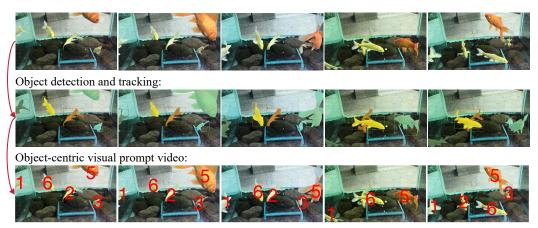

Query: Red fish with the most pronounced up-and-down motion

Reasoning: <think> To identify the red fish with the most pronounced up-and-down motion, I need to observe the movement of each fish in the video. The red fish appears to be the one labeled as "5" on the right side of the tank. It seems to have a more noticeable up-and-down motion compared to the other fish.

<answer> Target ID: 5 </answer>



Figure 10: Visualizations of unseen category in object detector.

A.5 TRAINING CURVES

Figure 11 shows that the accuracy reward improves steadily while the format reward quickly converges to near-perfect compliance, indicating stable and reliable RL optimization.

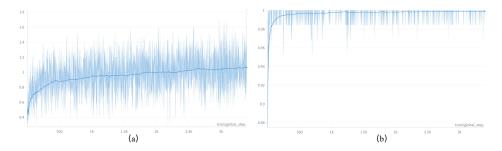


Figure 11: Training reward curves of STVG-R1. (a) Accuracy reward. (b) Format reward.

A.6 THE USE OF LARGE LANGUAGE MODELS (LLMS)

We employed large language models for language polishing to improve the clarity and readability of the manuscript. Specifically, LLMs were used to refine grammar, adjust sentence structure, and enhance overall flow, without altering the technical details and experimental results.