

HiViT: A SIMPLER AND MORE EFFICIENT DESIGN OF HIERARCHICAL VISION TRANSFORMER

Anonymous authors

Paper under double-blind review

ABSTRACT

There has been a debate on the choice of plain *vs.* hierarchical vision transformers, where researchers often believe that the former (*e.g.*, ViT) has a simpler design but the latter (*e.g.*, Swin) enjoys higher recognition accuracy. Recently, the emerge of masked image modeling (MIM), a self-supervised visual pre-training method, raised a new challenge to vision transformers in terms of flexibility, *i.e.*, part of image patches or tokens are to be discarded, which seems to claim the advantages of plain vision transformers. In this paper, we delve deep into the comparison between ViT and Swin, revealing that (i) the performance gain of Swin is mainly brought by a deepened backbone and relative positional encoding, (ii) the hierarchical design of Swin can be simplified into hierarchical patch embedding (proposed in this work), and (iii) other designs such as shifted-window attentions can be removed. By removing the unnecessary operations, we come up with a new architecture named **HiViT** (short for hierarchical ViT), which is simpler and more efficient than Swin yet further improves its performance on fully-supervised and self-supervised visual representation learning. In particular, after pre-trained using masked autoencoder (MAE) on ImageNet-1K, HiViT-B reports a **84.6%** accuracy on ImageNet-1K classification, a **53.3%** box AP on COCO detection, and a **52.8%** mIoU on ADE20K segmentation, significantly surpassing the baseline. Code is attached in the supplementary materials and will be released to the public.

1 INTRODUCTION

Deep neural networks have been the fundamentals of deep learning (LeCun et al., 2015) and advanced the research fields of computer vision, natural language processing, *etc.*, in the past decade. Since 2020, the computer vision community has adapted the transformer module from natural language processing (Vaswani et al., 2017; Devlin et al., 2019) to visual recognition, leading to a large family of vision transformers (Dosovitskiy et al., 2021; Liu et al., 2021; Wang et al., 2021; Zhou et al., 2021; Dai et al., 2021; Li et al., 2021a) that replaced the dominance of convolutional neural networks (Krizhevsky et al., 2012; He et al., 2016; Tan & Le, 2019). They have the ability of formulating long-range feature dependencies, which naturally benefits visual recognition especially when long-range relationship is important.

There are mainly two families of vision transformers, namely, the plain vision transformers (Dosovitskiy et al., 2021; Touvron et al., 2021) and the hierarchical vision transformers (Liu et al., 2021; Wang et al., 2021; Dong et al., 2021a; Chen et al., 2021a), differing from each other in whether multi-resolution feature maps are used. Intuitively, visual recognition requires hierarchical information and the hierarchical vision transformers indeed show superior recognition performance. However, the hierarchical vision transformers have introduced complicated and asymmetric operations, *e.g.*, Swin (Liu et al., 2021) used regional self-attentions with shifted windows, hence, they encounter difficulties when the tokens need to be flexibly manipulated. A typical example lies in masked image modeling (MIM), a recent methodology of visual pre-training (Bao et al., 2021; He et al., 2021; Xie et al., 2021b), in which a random subset of image patches are masked from input and the model learns by reconstructing the masked contents. In such a circumstance, the plain transformers (*e.g.*, ViT) can directly discard the masked tokens, while the hierarchical vision transformers (*e.g.*, Swin) must feed the entire image (with the masked patches filled with dummy contents) into the encoder (Xie et al., 2021b), slowing down the training procedure and contaminating the original data distribution.

This paper tries to answer the following question: is it possible to design an alternative vision transformer that enjoys both the flexibility of plain models and the representation ability of hierarchical models? We start with ViT and Swin, the most popular plain and hierarchical models. We design a path that connects them, with each step only changing a single design factor. The modifications include (a) increasing network depth, (b) adding relative positional encoding, (c) adding hierarchical patch embedding, (c') adding shifted-window attentions (an alternative to (c)), and (d) adding the 4th stage. We find that (a)(b)(c) are the main factors that contribute to visual recognition, while (c') shall be replaced by (c) and (d) can be discarded. In particular, the window attentions were designed to reduce the computation of self-attentions in the high-resolution (*i.e.*, low-level) feature maps, but we find that, under a sufficient network depth (*e.g.*, Swin-B used 24 transformer blocks), the low-level self-attentions only have marginal contribution and can be removed.

Based on the analysis, we present a hierarchical version of ViT named **HiViT**. Following (a)(b)(c) discussed above, the modification beyond the original ViT is minimal. At the **base** level, the architecture has 24 transformer blocks (the number of channels is reduced) in which the first 4 appear as hierarchical patch embedding that replaces the plain counterpart and the others are equipped with relative positional encoding – one needs only a few lines of code to replace ViT with HiViT.

The superiority of ViT is validated using two sets of experiments. We first perform fully-supervised image classification on ImageNet-1K (Deng et al., 2009), where HiViT enjoys consistent accuracy gains over both ViT and Swin, *e.g.*, at the **base** level, HiViT-B reports a 83.8% top-1 accuracy, which is +2.0% over ViT-B and +0.3% over Swin-B, and the number of learnable parameters is about 1/4 fewer than both competitors. Continuing to MIM, the advantages of HiViT persist. Table 1 shows the comparison on model size, training speed, and recognition accuracy. Under the MAE framework (He et al., 2021), with 1600 epochs of pre-training and 100 epochs of fine-tuning, HiViT-B reports a 84.6% top-1 accuracy on ImageNet-1K, which is +1.0% over ViT-B (trained with MAE) and +0.6% over Swin-B (trained with SimMIM (Xie et al., 2021b)). More importantly, HiViT enjoys the efficient implementation that discards all masked patches (or tokens) at the input stage, and hence the training procedure is as simple and efficient as applying MAE on ViT. The pre-trained models also show advantages on a wide range of downstream tasks, including linear probing (a 71.3% top-1 accuracy on ImageNet-1K), semantic segmentation (52.8% mIoU on ADE20K (Zhou et al., 2017)), and object detection and instance segmentation (a 53.3% box AP and a 47.0% mask AP) on COCO (Lin et al., 2014a) under the 3 \times training schedule).

Table 1: Compared to ViT and Swin, HiViT is faster in pre-training, needs fewer parameters, and achieves higher accuracy in visual recognition. All numbers in % are reported by pre-training the model using MIM (ViT-B and HiViT-B by MAE and Swin-B by SimMIM) and fine-tuning it to the downstream data. Please refer to experiments for detailed descriptions.

Architecture	ViT-B	Swin-B	HiViT-B
Params (M)	86.6	88.0	66.4
FLOPs (G)	17.5	15.4	15.9
Pre-training time per epoch (mins)	9.5	14.2	10.5
ImageNet-1K acc. (%)	83.6	84.0	84.6
COCO AP ^{box} (%)	51.2	52.3	53.3
ADE20K mIoU (%)	48.1	52.8	52.8

Overall, the core contribution of this paper is HiViT, a hierarchical vision transformer architecture that is off-the-shelf for a wide range of vision tasks. In particular, with masked image modeling being a generalized paradigm for self-supervised visual representation learning, HiViT has the potential of being directly plugged into many existing algorithms to improve their effectiveness and efficiency.

2 RELATED WORK

Vision transformers (Dosovitskiy et al., 2021) were adapted from the natural language processing (NLP) transformers (Vaswani et al., 2017; Devlin et al., 2019), opening a new direction of designing visual recognition models with weak induction bias (Tolstikhin et al., 2021). Early vision transformers (Dosovitskiy et al., 2021) mainly adopted the plain configuration, and efficient training methods are strongly required (Touvron et al., 2021). To cater for vision-friendly priors, Swin Transformer (Liu et al., 2021) proposed a hierarchical architecture that contains multi-level feature maps and validated good performance in many vision problems. Since then, various efforts emerged

in improving hierarchical vision transformers, including borrowing design experiences from convolutional neural networks (Wang et al., 2021; Wu et al., 2021; Vaswani et al., 2021), adjusting the design of self-attention geometry (Dong et al., 2021a; Yang et al., 2021), designing hybrid architectures to integrate convolution and transformer modules (Srinivas et al., 2021; Gao et al., 2021; Dai et al., 2021; Peng et al., 2021), *etc.*

In the context of computer vision, **self-supervised pre-training** aims to learn compact visual representations from unlabeled data. The key to this goal is to design a pretext task that sets a natural constraint for the target model to achieve by tuning its weights. The existing pretext tasks are roughly partitioned into three categories, namely, geometry-based proxies that were built upon the spatial relationship of image contents (Wei et al., 2019; Noroozi & Favaro, 2016; Gidaris et al., 2018), contrast-based proxies that assumed that different views of an image shall produce related visual features (He et al., 2020; Chen et al., 2020; Grill et al., 2020; Caron et al., 2021; 2020; Xie et al., 2021a; Tian et al., 2021), and generation-based proxies that required visual representations to be capable of recovering the original image contents (Zhang et al., 2016; Pathak et al., 2016; He et al., 2021; Bao et al., 2021; Tian et al., 2022). After the self-supervised learning (*a.k.a.* pre-training) stage, the target model is often evaluated by fine-tuning in a few downstream recognition tasks – the popular examples include image classification at ImageNet-1K (Deng et al., 2009), semantic segmentation at ADE20K (Zhou et al., 2017), object detection and instance segmentation at COCO (Lin et al., 2014b), *etc.*

We are interested in a particular visual pre-training method named **masked image modeling** (MIM) (Bao et al., 2021; He et al., 2021). The flowchart is straightforward: some image patches (corresponding to tokens) are discarded, the target model receives the incomplete input and the goal is to recover the original image contents. MIM is strongly related to the masked language modeling (MLM) task in NLP. BEiT (Bao et al., 2021) transferred the task to the computer vision community by masking the image patches and recovering the tokens produced by a pre-trained model (known as the tokenizer). MAE (He et al., 2021) improved the MIM framework by only taking the visible tokens as input and computing loss at the pixel level – the former change largely accelerated the training procedure as the computational costs of the encoder went down. The follow-up works explored different recovery targets (Wei et al., 2021), more complicated model designs (Fang et al., 2022; Chen et al., 2020), and other pretext tasks.

Our insights. It is worth noting that MIM matches plain vision transformers very well because each token is an individual unit and only the unmasked tokens are necessary during the pre-training process. The properties does not hold for hierarchical vision transformers, making them difficult to inherit the good properties (*e.g.*, training efficiency). Although SimMIM (Xie et al., 2021b) tried to combine Swin Transformer with MIM, it uses all tokens, including those corresponding to the masked patches, shall be preserved during the encoder stage, incurring much heavier computational costs. In this paper, we design a hierarchical vision transformer that (i) integrates the advantages of ViT and Swin series and (ii) better fits MIM in terms of accuracy and speed.

3 HiViT: SIMPLE AND EFFICIENT HIERARCHICAL VISION TRANSFORMER

3.1 PRELIMINARIES: VISION TRANSFORMERS AND MASKED IMAGE MODELING

We start with the vanilla plain vision transformer, abbreviated as ViT (Dosovitskiy et al., 2021). Mathematically, let the target model be $f(\mathbf{x}; \theta)$ where θ denotes the learnable parameters. Given a training image, \mathbf{x} , it is first partitioned into a few patches, $\mathcal{X} = \{\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_M\}$, where M is the number of patches. In ViT, each image patch is transferred into a token (*i.e.*, a feature vector), and the tokens are propagated through a few transformer blocks for visual feature extraction. Let there be L blocks, where the l -th block takes the token set of $\mathcal{U}^{(l-1)}$ as input and outputs $\mathcal{U}^{(l)}$, and $\mathcal{U}^{(0)} \equiv \mathcal{X}$. The main part of each block is self-attention, for which three intermediate features are computed upon $\mathbf{u}_m^{(l-1)}$, namely, the query, key, and value, denoted as $\mathbf{q}_m^{(l-1)}$, $\mathbf{k}_m^{(l-1)}$, and $\mathbf{v}_m^{(l-1)}$, respectively. Based on these quantities, the self-attention of $\mathbf{z}_m^{(l-1)}$ is computed by $\text{SA}(\mathbf{z}_m^{(l-1)}) = \text{softmax}\left[\frac{\mathbf{q}_m^{(l-1)} \cdot \mathbf{k}_1^{(l-1)\top}, \dots, \mathbf{q}_m^{(l-1)} \cdot \mathbf{k}_M^{(l-1)\top}}{\sqrt{D_{\text{key}}}}\right] \cdot \left[\frac{\mathbf{v}_1^{(l-1)}, \dots, \mathbf{v}_M^{(l-1)}}{\sqrt{D_{\text{key}}}}\right]^\top$, where $1/\sqrt{D_{\text{key}}}$ is a scaling vector. Auxiliary operations, including layer normalization, multi-layer perceptron, skip-layer connection, are applied after the self-attention computation.

ViT is simple and effective on a wide range of visual recognition tasks, but it lacks the ability of extracting hierarchical visual features as most convolutional neural networks (Simonyan & Zisserman, 2015; He et al., 2016; Tan & Le, 2019) have. Swin Transformer (Swin for short) is a popular variant over ViT that allows the spatial resolution to reduce gradually throughout the backbone, and avoids high computational costs with shifted-window attentions. Since then, there has been a competition between ViT and Swin – Swin showed initial advantages on detection and segmentation, yet ViT-based models managed to catch up with better implementation details (Li et al., 2022a).

The emerge of masked image modeling (MIM) becomes a new and important decider for the competition. MIM is a new paradigm of self-supervised visual representation learning that involves feeding a partially masked image to the target model $f(\mathbf{x}; \theta)$ and training the model to recover it. Following the above notations, MIM randomly chooses a subset $\mathcal{M}' \subset \{1, 2, \dots, M\}$, feeds the patches with IDs in \mathcal{M}' (denoted as \mathcal{X}') into $f(\mathbf{x}; \theta)$ (*a.k.a.*, the encoder), and appends an auxiliary decoder to it, aiming at recovering the masked image contents. The objective is either computed on tokenized features (Bao et al., 2021) or pixels (He et al., 2021). In the context of MIM, ViT enjoys an efficient implementation that the tokens not in \mathcal{X}' can be discarded at the beginning of encoder, while Swin must feed the entire input image, with the masked patches filled with dummy contents, into the encoder (Xie et al., 2021b). In comparison, Swin not only requires heavier computation of encoder, but also contaminates the original image data distribution with the dummy tokens.

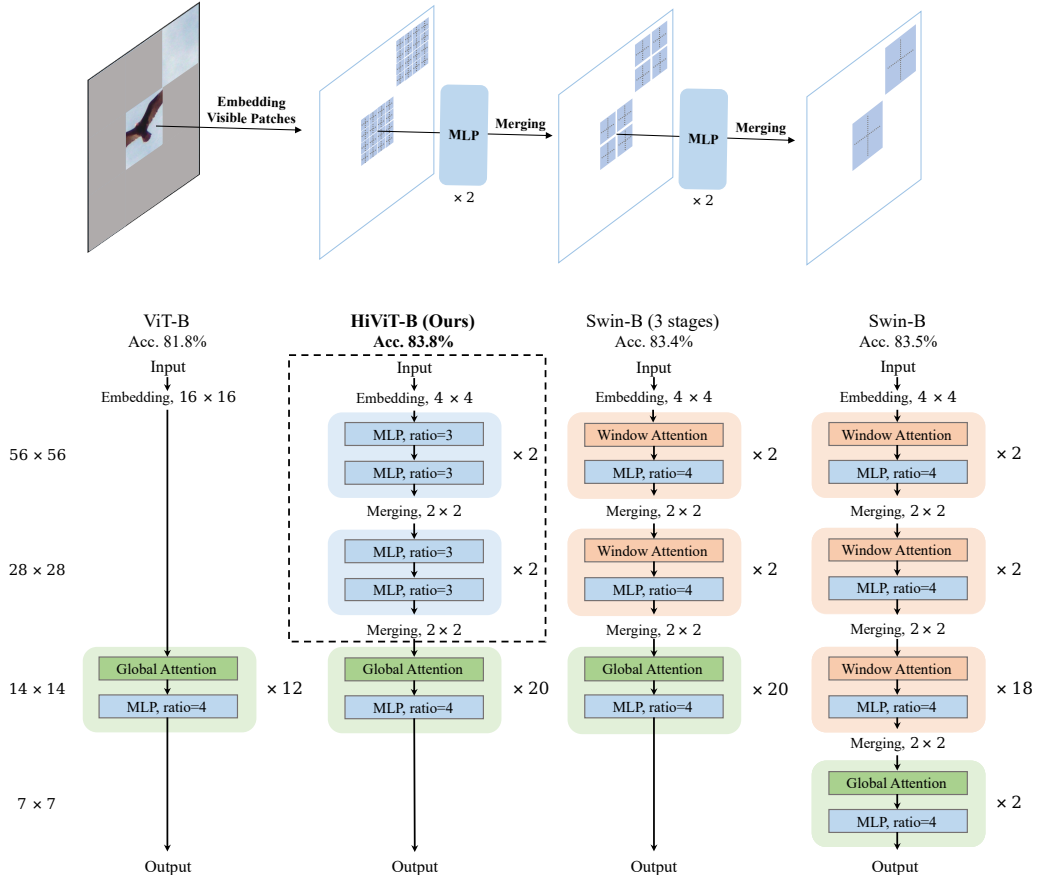


Figure 1: **Top:** hierarchical patch embedding, the way that HiViT uses for low-level feature manipulation (see the dashed box in the HiViT-B architecture). Note that the first step (*i.e.*, patch embedding) involves embedding small (4×4) patches unlike ViT that directly embeds 16×16 patches and thus loses rich spatial information. **Bottom:** the transition from ViT to Swin, with HiViT appearing in the midst. Please refer to Table 2 for details and results.

3.2 TRANSITION FROM ViT TO SWIN: SEEKING FOR REALLY USEFUL OPERATIONS

We look forward to a variant of vision transformers that keeps the ability of learning hierarchical visual representations yet gets rid of the burdens in manipulating the MIM task. For this purpose, we inherit the methodology used in Chen et al. (2021d) to gradually transit a ViT-B model into a Swin-B model. We allow only one modification at each step so that we can distinguish useful operations. The intermediate models are illustrated in Figure 1.

A hierarchical transformer calls for an efficient function to deal with high-resolution feature maps. We investigate two possibilities here. One is the solution offered by Swin that computes shifted-window attentions – note that these operations actually banned the efficient implementation of MIM as the masked patches can no longer be discarded from input. Another is our solution named hierarchical patch embedding (illustrated in the top part of Figure 1) that only involves MLP and patch merging. As shown below, our solution achieves higher accuracy yet requires lower computational costs. More importantly, our solution avoids information exchange across Stage-3 tokens, which brings the efficient implementation of MIM back if the masking operation is performed on Stage 3.

Table 2: ImageNet-1K classification and ADE20K segmentation results of the models along the transition process, from ViT-B to Swin-B.

	Model	Module #				Dims	RPE	Low Att.	Mid Att.	ImageNet		ADE20K mIoU
		56 ²	28 ²	14 ²	7 ²					Top-1	Acc.	
(o)	ViT-B	-	-	12	-	768	✗	✗	✗	81.8		45.5
(a)	(o) + Depth	-	-	24	-	512	✗	✗	✗	82.9		48.1
(b)	(a) + RPE	-	-	24	-	512	✓	✗	✗	83.2		48.6
(c)	(b) + Hierarchical	2	2	20	-	512	✓	✗	✗	83.8		49.5
(c')	(b) + Low Att.	2	2	20	-	512	✓	✓	✗	83.4		47.9
(d)	(c') + Stage 4	2	2	18	2	512	✓	✓	✓	83.5		48.0

We evaluate all the models on ImageNet-1K classification and ADE20K segmentation, where the detailed settings are elaborated in Sections 4.1 and 4.3, respectively. For these models, the classification accuracy, the number of parameters and FLOPs are listed in Table 2. We summarize the impact of each step as follows, where (% , %) stand for the accuracy gains compared to the prior step on ImageNet-1K and ADE20K, respectively.

- Step (a) (+1.1%, +2.6%) by using a deeper architecture with fewer channels. This factor contributes the largest advantage of Swin-B.
- Step (b) (+0.3%, +0.5%) by replacing vanilla positional encoding with relative positional encoding (RPE). This small but consistent gain validates the effectiveness of RPE.
- Step (c) (+0.6%, +0.9%) by introducing hierarchical patch embedding to replace the first 4 blocks. The considerable gains validate the effectiveness of hierarchical patch embedding.
- Step (c') (+0.2%, -0.7%) by introducing high-resolution (56×56 and 28×28) token maps and adding 7×7 shifted-window attentions. As an alternative solution (used by Swin) to Step (c), it causes a significant ADE20K segmentation accuracy and Compared to Step (c), we conclude that hierarchical patch embedding is more effective and efficient than low-level transformer blocks (with shifted-window attentions).
- Step (d) (+0.1%, +0.1%) by adding Stage 4 (2 blocks with 7×7 token maps), which involves (i) reducing the number of blocks at Stage 3 by 2 (moving them to Stage 4) and (ii) modifying Stage 3 from global attentions to shifted-window attentions. This operation increases the parameter count by 33% because Stage 4 contains 8×-dim channels while Stage 3 only has 4×-dim channels. Expect for the little gain, this operation this not friendly to MIM since we take Stage 3 (with 14 × 14 tokens) as the playground of masking patches.

From the above, we learn the lesson that, besides RPE, Swin mainly benefits from using a deeper architecture and introducing hierarchical patch embedding. Other operations, including window attentions and the 4th stage with 7 × 7 tokens, do not help visual recognition. Before entering the next part, we would like to offer some side notes. If Step (a) is not performed before Step (b), *i.e.*, the first 4 layers of a 12-layer ViT-B (not a 24-layer deepened one) is replaced by hierarchical

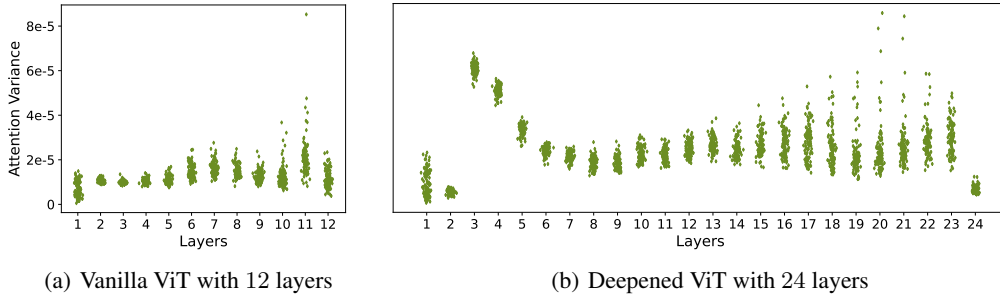


Figure 2: As a measure of instability of self-attention, we compute the variance of attention between models trained from scratch, starting from $N = 3$ different random seeds.

patch embedding, the recognition accuracy will drop. **This fact shows that early attentions can be replaced by hierarchical patch embedding only when the model is deep enough.**

To diagnose the above statement, we design an additional experiment on two plain vision transformers (ViT). The first is a vanilla ViT with 12 layers and a channel number of 768, and the second is a deepened ViT with 24 layers and a channel number of 512. For each architecture, we train N models individually from scratch (fully-supervised, on ImageNet-1K). After that, we randomly sample 1,000 images from the ImageNet-1K test set, and compute the intermediate output at each transformer block – for each image at each block, it contains 12 (the number of heads) attention weight maps sized 196×196 ($196 = 14 \times 14$ is the number of tokens). We first average the 12 maps into one (for each individual model), and then compute the variance of N weights at each position, and finally average the 196×196 variances into a single number, indicating whether the attentions computed at this image and this block are stable – in other words, both the vanilla and deepened ViT have 1,000 variances (for the 1,000 sampled images) at each block.

We plot these numbers in Figure 2. One can observe that, in the vanilla ViT, for most samples, the variance of the average attention map at each block is small, indicating that the models have learned stable attention patterns. There are some outliers showing large variance in deep layers, which imply that in some samples, inter-patch information is no longer needed in deep layers. In the deeper ViT, for almost all input samples, the attention maps of the shallow layers have much higher variance¹, indicating that these layers do not learn reliable attention maps. These experimental observations show that early layers cannot learn effective attentions in a deeper architecture, hence removing the shallow window attentions in our HiViT design has little negative impacts.

3.3 HiViT AND ITS APPLICATION ON MIM

Summarizing the above analysis, we obtain HiViT, the halfway architecture when Steps (a)–(c) are performed while others are discarded. An illustration of HiViT-B is shown in Figure 1. In fully-supervised ImageNet-1K classification, it achieves a higher accuracy than other variants using a smaller number of learnable parameters.

More importantly, we find that HiViT fits MIM very well. To reveal this, we show an example at the **base** level. we follow the convention to partition the entire image into 14×14 patches – each patch corresponds to a token at Stage 3. Since (i) Stages 1 and 2 are modified so that they do not contain inter-token operations and (ii) Stage 4 is removed so that all tokens in Stage are symmetric, we can use a simple implementation of MIM as in the vanilla ViT. That said, all masked patches can be directly discarded from input. As we shall see in experiments, this implementation not only accelerates the self-supervised learning process by nearly 100%, but also brings higher visual recognition accuracy in various downstream tasks. We conjecture that part of the improvement comes from that we have cleaned input data to avoid dummy patches (as in SimMIM) so that the gap between upstream and downstream image data becomes smaller.

¹Exceptions happen in the first two layers, where the 16×16 patch embedding just brings in initial patch features, and we find that the attentions are less meaningful though the variances are small.

Table 3: Fully-supervised results on ImageNet-1K. The throughput of these models are reported on a single NVIDIA Tesla-V100 GPU.

Model Type	Model	image size	Params	FLOPs	Throughput (image / s)	ImageNet-1K Top-1 Acc.
ConvNets	EffNet-B3	300	12M	1.8G	732	81.6
	EffNet-B4	380	19M	4.2G	349	82.9
	EffNet-B5	456	30M	9.9G	169	83.6
	EffNet-B6	528	43M	19.0G	97	84.0
	EffNet-B7	600	66M	37.0G	55	84.3
Plain Transformers	ViT-B/16	384	86M	55.4G	86	77.9
	ViT-L/16	384	307M	190.7G	27	77.9
	DeiT-S	224	22M	4.5G	940	79.8
	DeiT-B	224	86M	17.4G	292	81.8
Transformers w/ Convolution	CoAtNet-0	224	25M	4.2G	-	81.6
	CoAtNet-1	224	42M	8.4G	-	83.3
	CoAtNet-2	224	75M	15.7G	-	84.1
	MViTv2-T	224	24M	4.7G	-	82.3
	MViTv2-S	224	35M	7.0G	-	83.6
	MViTv2-B	224	52M	10.2G	-	84.4
	CSWin-T	224	23M	4.3G	701	82.7
	CSWin-S	224	35M	6.9G	437	83.6
	CSWin-B	224	78M	15.0G	250	84.2
Hierarchical Transformers	Swin-T	224	28M	4.5G	755	81.2
	Swin-S	224	50M	8.7G	437	83.1
	Swin-B	224	88M	15.4G	278	83.5
	HiViT-T (ours)	224	19M	4.6G	913	82.1
	HiViT-S (ours)	224	38M	9.1G	436	83.5
	HiViT-B (ours)	224	66M	15.9G	276	83.8

4 EXPERIMENTS

We build our base model, called HiViT-B, to have a computation complexity similar to Swin-B but slightly smaller than ViT-B. We also introduce HiViT-T, HiViT-S and HiViT-L, which are versions of about $0.25\times$, $0.5\times$ and $2\times$ the computational complexity of HiViT-B, respectively. We first conduct fully supervised experiments with labels using the proposed HiViT on ImageNet-1K dataset (Deng et al., 2009). Then, HiViT models are tested using masked image modeling self-supervised methods (MIM) (He et al., 2021). The self-supervised pre-trained models are also transferred to downstream tasks including object detection on COCO (Lin et al., 2014b) and semantic segmentation on ADE20K (Zhou et al., 2017). The detailed experimental settings are elaborated in Appendix A.

4.1 FULLY-SUPERVISED IMAGE CLASSIFICATION

ImageNet Results. The fully supervised training results are shown in Table 3. Compared to the vanilla ViT models, the HiViT variants report much better results in terms of classification accuracy and computational complexity. In particular, HiViT-T/B surpass DeiT-S/B (ViT equipped with a better training strategy) by 2.3% and 2.0%, respectively, with similar computational costs. Compared to the hierarchical baseline (*i.e.*, Swin), HiViT still shows competitive performance, with HiViT-T/S/B beating Swin-T/S/B by 0.9%, 0.4%, and 0.3%, respectively, with similar computational costs. In addition, by removing shallow attentions and Stage 4 (with a large channel number), HiViT-T/S/B requires 32.2%, 24.4% and 24.4% fewer parameters compared to Swin-T/S/B models. Hence, HiViT is a simple architecture that does not require further optimization tricks beyond Swin. We will see its generalization ability in later experiments.

We note that some recent variants of vision transformers (*e.g.*, CSWin (Dong et al., 2021a) and MViTv2 (Li et al., 2022b)) achieved higher classification accuracy on ImageNet-1K. It should be noted that these models involved convolution operations throughout the entire network. The convolution operations, like window attentions, avoid the model from the ability of serializing the input, making them difficult to be applied to masked image modeling. We classify these models into the category of mixed models (transformers w/ convolution) in Table 3. Although HiViT is inferior to these architectures in fully-supervised ImageNet classification, we will see later that HiViT better benefits from visual pre-training. For example, CSWin-B (Dong et al., 2021a), with a comparable complexity to HiViT-B, reports a 84.2% top-1 accuracy on ImageNet-1K under fully-supervised learning, higher than 83.8% reported by ViT-B, and a 50.8% AP^{box} on COCO object detection. However, after pre-training using MIM and fine-tuning, HiViT-B improves these numbers to 84.6% and 53.3% (see the following subsections), showing its advantages in self-supervised learning.

Table 4: The fine-tuning accuracy on ImageNet-1K when the model is pre-trained without labels.

Method	Network	Params	FLOPs	Epochs	Top-1 Acc.
BEiT (Bao et al., 2021)	ViT-B	86M	17.4G	400	83.2
CAE (Chen et al., 2022)	ViT-B	86M	17.4G	800	83.6
MaskFeat (Wei et al., 2021)	ViT-B	86M	17.4G	800	84.0
SimMIM (Xie et al., 2021b)	ViT-B	86M	17.4G	800	83.8
SimMIM (Xie et al., 2021b)	Swin-B	88M	15.4G	800	84.0
MixMIM (Liu et al., 2022)	Swin-B	88M	15.4G	600	84.4
MAE (He et al., 2021)	ViT-B	86M	17.4G	1600	83.6
Ours	HiViT-B	66M	15.9G	1600	84.6
SimMIM (Xie et al., 2021b)	Swin-L	197M	35.8G	800	85.4
SimMIM (Xie et al., 2021b)	SwinV2-H	658M	118.1G	800	85.7
MixMIM (Liu et al., 2022)	Swin-L	197M	35.8G	600	85.7
MAE (He et al., 2021)	ViT-L	304M	61.6G	1600	85.9
Ours	HiViT-L	266.8M	63.8G	1600	86.4

4.2 SELF-SUPERVISED VISUAL REPRESENTATION LEARNING

Fine-tuning. The fine-tuning results are provided in Table 4 and only the encoder part is used to test. As shown in Table 4, under the MAE pre-training pipeline, HiViT-B achieves 1.0% performance gain over ViT-B, validating the structural advantage of our hierarchical transformer over plain vision transformers. Our results are still competitive when compared to hierarchical transformer Swin-B pre-trained using SimMIM (Xie et al., 2021b) and MixMIM (Liu et al., 2022). When scaling to the large scale, HiViT-L maintains the advantage over the plain transformer (ViT-L) with similar computational costs and fewer parameters, and claims more significant advantage (86.4% vs. 85.7%) compared to Swin-L (using MixMIM) and SwinV2-H (using SimMIM).

Training Efficiency. HiViT only requires the active (unmasked) tokens as input so that it enjoys high efficiency during the MIM pre-training. Running on eight NVIDIA Tesla V-100 GPUs, each pre-training epoch on ImageNet-1K takes 10.5 minutes, which is almost $2\times$ as fast as the version that we feed all patches into the encoder (the case if we use a Swin-like backbone). We conjecture that this is part of the reasons that SimMIM (using Swin) reduced the input resolution to 192×192 , which may result in performance drop in downstream visual recognition tasks.

4.3 TRANSFERRING SELF-SUPERVISED MODELS TO DENSE PREDICTION

Objection Detection on COCO. For objection detection, we build a Mask RCNN detector (He et al., 2017) beyond the pre-trained models. our hierarchical model can provide feature maps at multiple resolutions as inputs for the FPN head, leading to a significant advantage of HiViT over the plain transformers. As shown in Tab. 5, we compare the performance with state-of-the-art methods. When fine-tuned for 12 epochs ($1\times$), HiViT-B significantly outperforms ViT-B (pre-trained by different methods), reached an AP^{box} of 51.3% and an AP^{mask} of 44.6%. When fine-tuned for 36 epochs ($3\times$), HiViT-B still outperforms Swin-B pre-trained by other methods by a $\sim 1.0\%$ AP.

Table 5: COCO detection fine-tuning results transferred from self-supervised pre-training.

Method	Network	Detector	Epochs	COCO	
				AP ^{box}	AP ^{mask}
MoCo v3 (Chen et al., 2021b)	ViT-B	Mask RCNN	12	45.5	40.5
BEiT (Bao et al., 2021)	ViT-B	Mask RCNN	12	42.1	37.8
PeCo (Dong et al., 2021b)	ViT-B	Mask RCNN	12	44.9	40.4
MAE (He et al., 2021)	ViT-B	Mask RCNN	12	48.4	42.6
CAE (Chen et al., 2022)	ViT-B	Mask RCNN	12	49.2	43.3
Ours	HiViT-B	Mask RCNN	12	51.3	44.6
Supervised (Li et al., 2021b)	ViT-B	Mask RCNN	100	47.9	42.9
Supervised (Dong et al., 2021a)	CSWin-B	Mask RCNN	36	50.8	44.9
Supervised (Li et al., 2022b)	MViTv2-B	Mask RCNN	36	51.0	45.7
MAE (Li et al., 2022a)	ViT-B	ViTDet	100	51.2	45.5
SimMIM (Xie et al., 2021b)	Swin-B	Mask RCNN	36	52.3	-
MixMIM (Liu et al., 2022)	MixMIM-B	Mask RCNN	36	52.2	46.5
Ours	HiViT-B	Mask RCNN	36	53.3	47.0

Semantic Segmentation on ADE20K.

The results on ADE20K are shown in Table 6. We report the mean intersection over union (mIoU) values. Similar to the situation on COCO, HiViT-B benefits from hierarchical visual features and reports a 52.8% mIoU, surpassing the ViT-B models pre-trained by MoCo-v3 (Chen et al., 2021c), BEiT (Bao et al., 2021), CAE (Chen et al., 2022), and MAE (He et al., 2021) by a significant margin of at least 4.0%. In terms of hierarchical vision transformers, HiViT-B outperforms MixMIM-B and reports the same performance as SimMIM-B. One can find that, on these dense prediction benchmarks, the advantage of HiViT (over ViT) becomes much more significant, validating the usefulness of hierarchical visual representations.

Table 6: Semantic segmentation on ADE20K results.

Method	Network	mIoU
Supervised (He et al., 2021)	ViT-B	47.0
MoCo v3 (Chen et al., 2021b)	ViT-B	47.3
BEiT (Bao et al., 2021)	ViT-B	47.1
PeCo (Dong et al., 2021b)	ViT-B	48.5
MAE (He et al., 2021)	ViT-B	48.1
CAE (Chen et al., 2022)	ViT-B	48.8
SimMIM (Xie et al., 2021b)	Swin-B	52.8
MixMIM (Liu et al., 2022)	MixMIM-B	50.3
Ours	HiViT-B	52.8

5 CONCLUSIONS

This paper presents a hierarchical vision transformer named HiViT. Starting with Swin Transformers, we remove redundant operations that cross the border of tokens in the main stage, and show that such modifications do not harm, but slightly improve the model’s performance in both fully-supervised and self-supervised visual representation learning. HiViT shows a clear advantage in integrating with masked image modeling, on which the efficient implementation of MAE can be directly transplanted from ViT to HiViT, accelerating the training speed significantly. We expect that HiViT becomes an off-the-shelf replacement of ViT and Swin in the future research, especially when the models need to be pre-trained with masked image modeling.

Limitations. Despite the improvement observed in the experiments, our method has some limitations. The most important one lies in that the masking unit size is fixed – this implies that we need to choose a single ‘main stage’. Fortunately, the 3rd stage of Swin Transformers contribute most parameters and computations, hence it is naturally chosen, however, the method may encounter difficulties in the scenarios that no dominant stages exist. In addition, we look forward to advanced architecture designs that go beyond the constraints. A possible solution lies in modifying low-level code (*e.g.*, in CUDA) to support arbitrary and variable grouping of tokens, but, more essentially, we expect a flexible learning framework beyond MIM that supports variable sizes of masking units.

ETHICS STATEMENT

Our research focuses on two fundamental topics in computer vision, namely, (i) designing an efficient architecture of deep neural networks and (ii) self-supervised visual representation learning. The datasets used for evaluation are public benchmarks that were widely used in the community. To the best of our knowledge, this research does not have ethical concerns to report.

REPRODUCIBILITY STATEMENT

We have included the code in the supplementary material. After the review process, we will also open-source the pre-trained models (which can also be obtained by running our code on public datasets, *e.g.*, ImageNet-1K) to ease the community to reproduce our results.

REFERENCES

- Hangbo Bao, Li Dong, and Furu Wei. Beit: Bert pre-training of image transformers. *arXiv preprint arXiv:2106.08254*, 2021.
- Mathilde Caron, Ishan Misra, Julien Mairal, Priya Goyal, Piotr Bojanowski, and Armand Joulin. Unsupervised learning of visual features by contrasting cluster assignments. *Advances in Neural Information Processing Systems*, 33:9912–9924, 2020.
- Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. *arXiv preprint arXiv:2104.14294*, 2021.
- Chun-Fu Chen, Quanfu Fan, and Rameswar Panda. Crossvit: Cross-attention multi-scale vision transformer for image classification. In *ICCV*, 2021a.
- Kai Chen, Jiaqi Wang, Jiangmiao Pang, Yuhang Cao, Yu Xiong, Xiaoxiao Li, Shuyang Sun, Wansen Feng, Ziwei Liu, Jiarui Xu, Zheng Zhang, Dazhi Cheng, Chenchen Zhu, Tianheng Cheng, Qijie Zhao, Buyu Li, Xin Lu, Rui Zhu, Yue Wu, Jifeng Dai, Jingdong Wang, Jianping Shi, Wanli Ouyang, Chen Change Loy, and Dahua Lin. Mmdetection: Open mmlab detection toolbox and benchmark. *arXiv preprint arXiv:1906.07155*, 2019.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pp. 1597–1607. PMLR, 2020.
- Xiaokang Chen, Mingyu Ding, Xiaodi Wang, Ying Xin, Shentong Mo, Yunhao Wang, Shumin Han, Ping Luo, Gang Zeng, and Jingdong Wang. Context autoencoder for self-supervised representation learning. *arXiv preprint arXiv:2202.03026*, 2022.
- Xinlei Chen, Saining Xie, and Kaiming He. An empirical study of training self-supervised visual transformers. *arXiv preprint arXiv:2104.02057*, 2021b.
- Xinlei Chen, Saining Xie, and Kaiming He. An empirical study of training self-supervised vision transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 9640–9649, 2021c.
- Zhengsu Chen, Lingxi Xie, Jianwei Niu, Xuefeng Liu, Longhui Wei, and Qi Tian. Visformer: The vision-friendly transformer. In *ICCV*, pp. 589–598, 2021d.
- Zihang Dai, Hanxiao Liu, Quoc Le, and Mingxing Tan. Coatnet: Marrying convolution and attention for all data sizes. *Advances in Neural Information Processing Systems*, 34, 2021.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Fei-Fei Li. Imagenet: A large-scale hierarchical image database. In *IEEE CVPR*, pp. 248–255. IEEE CS, 2009.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *NAACL-HLT (1)*, 2019.

- Xiaoyi Dong, Jianmin Bao, Dongdong Chen, Weiming Zhang, Nenghai Yu, Lu Yuan, Dong Chen, and Baining Guo. Cswin transformer: A general vision transformer backbone with cross-shaped windows. *arXiv preprint arXiv:2107.00652*, 2021a.
- Xiaoyi Dong, Jianmin Bao, Ting Zhang, Dongdong Chen, Weiming Zhang, Lu Yuan, Dong Chen, Fang Wen, and Nenghai Yu. Peco: Perceptual codebook for bert pre-training of vision transformers. *arXiv preprint arXiv:2111.12710*, 2021b.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. In *ICLR*, 2021.
- Yuxin Fang, Li Dong, Hangbo Bao, Xinggang Wang, and Furu Wei. Corrupted image modeling for self-supervised visual pre-training. *CoRR*, abs/2202.03382, 2022.
- Peng Gao, Jiasen Lu, Hongsheng Li, Roozbeh Mottaghi, and Aniruddha Kembhavi. Container: Context aggregation networks. In *NeurIPS*, pp. 19160–19171, 2021.
- Spyros Gidaris, Praveer Singh, and Nikos Komodakis. Unsupervised representation learning by predicting image rotations. In *ICLR*, 2018.
- Jean-Bastien Grill, Florian Strub, Florent Altché, Corentin Tallec, Pierre Richemond, Elena Buchatskaya, Carl Doersch, Bernardo Avila Pires, Zhaohan Guo, Mohammad Gheshlaghi Azar, et al. Bootstrap your own latent-a new approach to self-supervised learning. *Advances in Neural Information Processing Systems*, 33:21271–21284, 2020.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *IEEE CVPR*, pp. 770–778, 2016.
- Kaiming He, Georgia Gkioxari, Piotr Dollar, and Ross Girshick. Mask r-cnn. In *IEEE ICCV*, 2017.
- Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 9729–9738, 2020.
- Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. *arXiv preprint arXiv:2111.06377*, 2021.
- Alex Krizhevsky, Ilya Sutskever, and Geoffrey E. Hinton. Imagenet classification with deep convolutional neural networks. In *NIPS*, pp. 1106–1114, 2012.
- Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. Deep learning. *nature*, 521(7553):436–444, 2015.
- Chunyu Li, Jianwei Yang, Pengchuan Zhang, Mei Gao, Bin Xiao, Xiyang Dai, Lu Yuan, and Jianfeng Gao. Efficient self-supervised vision transformers for representation learning. *arXiv preprint arXiv:2106.09785*, 2021a.
- Yanghao Li, Saining Xie, Xinlei Chen, Piotr Dollar, Kaiming He, and Ross Girshick. Benchmarking detection transfer learning with vision transformers. *arXiv preprint arXiv:2111.11429*, 2021b.
- Yanghao Li, Mao Hanzi Mao, Ross Girshick, and Kaiming He. Exploring plain vision transformer backbones for object detection. *arXiv preprint arXiv:2203.16527*, 2022a.
- Yanghao Li, Chao-Yuan Wu, Haoqi Fan, Karttikeya Mangalam, Bo Xiong, Jitendra Malik, and Christoph Feichtenhofer. Mvitv2: Improved multiscale vision transformers for classification and detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 4804–4814, 2022b.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *ECCV*, pp. 740–755. Springer, 2014a.

- Tsung-Yi Lin, Michael Maire, Serge J. Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft COCO: common objects in context. In *ECCV*, pp. 740–755, 2014b.
- Jihao Liu, Xin Huang, Yu Liu, and Hongsheng Li. Mixmim: Mixed and masked image modeling for efficient visual representation learning. *arXiv preprint arXiv:2205.13137*, 2022.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. *arXiv preprint arXiv:2103.14030*, 2021.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- Mehdi Noroozi and Paolo Favaro. Unsupervised learning of visual representations by solving jigsaw puzzles. In *ECCV*, pp. 69–84. Springer, 2016.
- Deepak Pathak, Philipp Krahenbuhl, Jeff Donahue, Trevor Darrell, and Alexei A Efros. Context encoders: Feature learning by inpainting. In *CVPR*, pp. 2536–2544, 2016.
- Zhiliang Peng, Wei Huang, Shanzhi Gu, Lingxi Xie, Yaowei Wang, Jianbin Jiao, and Qixiang Ye. Conformer: Local features coupling global representations for visual recognition. *arXiv preprint arXiv:2105.03889*, 2021.
- Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. In *ICLR*, 2015.
- Aravind Srinivas, Tsung-Yi Lin, Niki Parmar, Jonathon Shlens, Pieter Abbeel, and Ashish Vaswani. Bottleneck transformers for visual recognition. In *CVPR*, pp. 16519–16529, 2021.
- Mingxing Tan and Quoc V. Le. Efficientnet: Rethinking model scaling for convolutional neural networks. In *ICML*, pp. 6105–6114, 2019.
- Yunjie Tian, Lingxi Xie, Xiaopeng Zhang, Jiemin Fang, Haohang Xu, Wei Huang, Jianbin Jiao, Qi Tian, and Qixiang Ye. Semantic-aware generation for self-supervised visual representation learning. *CoRR*, abs/2111.13163, 2021.
- Yunjie Tian, Lingxi Xie, Jiemin Fang, Mengnan Shi, Junran Peng, Xiaopeng Zhang, Jianbin Jiao, Qi Tian, and Qixiang Ye. Beyond masking: Demystifying token-based pre-training for vision transformers. *CoRR*, abs/2203.14313, 2022.
- Ilya O Tolstikhin, Neil Houlsby, Alexander Kolesnikov, Lucas Beyer, Xiaohua Zhai, Thomas Unterthiner, Jessica Yung, Andreas Steiner, Daniel Keysers, Jakob Uszkoreit, et al. Mlp-mixer: An all-mlp architecture for vision. *NeurIPS*, 34, 2021.
- Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *ICML*, volume 139, pp. 10347–10357, 2021.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- Ashish Vaswani, Prajit Ramachandran, Aravind Srinivas, Niki Parmar, Blake Hechtman, and Jonathon Shlens. Scaling local self-attention for parameter efficient visual backbones. In *CVPR*, pp. 12894–12904, 2021.
- Wenhai Wang, Enze Xie, Xiang Li, Deng-Ping Fan, Kaitao Song, Ding Liang, Tong Lu, Ping Luo, and Ling Shao. Pvtv2: Improved baselines with pyramid vision transformer. *arXiv preprint arXiv:2106.13797*, 2021.
- Chen Wei, Lingxi Xie, Xutong Ren, Yingda Xia, Chi Su, Jiaying Liu, Qi Tian, and Alan L Yuille. Iterative reorganization with weak spatial constraints: Solving arbitrary jigsaw puzzles for unsupervised representation learning. In *CVPR*, pp. 1910–1919, 2019.

- Chen Wei, Haoqi Fan, Saining Xie, Chao-Yuan Wu, Alan Yuille, and Christoph Feichtenhofer. Masked feature prediction for self-supervised visual pre-training. *arXiv preprint arXiv:2112.09133*, 2021.
- Haiping Wu, Bin Xiao, Noel Codella, Mengchen Liu, Xiyang Dai, Lu Yuan, and Lei Zhang. Cvt: Introducing convolutions to vision transformers. *arXiv preprint arXiv:2103.15808*, 2021.
- Tete Xiao, Yingcheng Liu, Bolei Zhou, Yuning Jiang, and Jian Sun. Unified perceptual parsing for scene understanding. In *ECCV*, pp. 418–434, 2018.
- Zhenda Xie, Yutong Lin, Zheng Zhang, Yue Cao, Stephen Lin, and Han Hu. Propagate yourself: Exploring pixel-level consistency for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 16684–16693, 2021a.
- Zhenda Xie, Zheng Zhang, Yue Cao, Yutong Lin, Jianmin Bao, Zhuliang Yao, Qi Dai, and Han Hu. Simmim: A simple framework for masked image modeling. *arXiv preprint arXiv:2111.09886*, 2021b.
- Jianwei Yang, Chunyuan Li, Pengchuan Zhang, Xiyang Dai, Bin Xiao, Lu Yuan, and Jianfeng Gao. Focal self-attention for local-global interactions in vision transformers. *arXiv preprint arXiv:2107.00641*, 2021.
- Richard Zhang, Phillip Isola, and Alexei A Efros. Colorful image colorization. In *ECCV*, pp. 649–666. Springer, 2016.
- Bolei Zhou, Hang Zhao, Xavier Puig, Sanja Fidler, Adela Barriuso, and Antonio Torralba. Scene parsing through ade20k dataset. In *CVPR*, pp. 633–641, 2017.
- Daquan Zhou, Bingyi Kang, Xiaojie Jin, Linjie Yang, Xiaochen Lian, Zihang Jiang, Qibin Hou, and Jiashi Feng. Deepvit: Towards deeper vision transformer. *arXiv preprint arXiv:2103.11886*, 2021.

A APPENDIX

Table 7: Configurations for HiViT variants.

Model	Depth			Dim			Heads			Params (M)	FLOPs (G)
	56^2	28^2	14^2	56^2	28^2	14^2	56^2	28^2	14^2		
HiViT-T (tiny)	1	1	10	96	192	384	-	-	6	19.2	4.6
HiViT-S (small)	2	2	20	96	192	384	-	-	6	37.5	9.1
HiViT-B (base)	2	2	20	128	256	512	-	-	8	66.4	15.9
HiViT-L (large)	4	4	36	192	384	768	-	-	12	266.8	63.8

Model Configurations Three models including HiViT-T/S/B/L are tested on fully supervised learning or self-supervised learning and their configurations are shown in Tab. 7. The “Depth” represents the block number on different stages (56^2 , 28^2 , and 14^2 are the 1st, 2nd, and 3rd stage respectively). The “Dim” and “Heads” represent the dimension and attention head of 3 stages. We align our models on FLOPs, and the parameters are less compared to other works. We report the inference throughput speed in Tab. 3 by testing the 224^2 images on V100 GPU with the same script.

Fully Supervised Experimental Details We first evaluate our models with fully supervised learning on ImageNet-1K (Deng et al., 2009) which contains 1.28M training images and 50K validation ones divided into 1,000 categories. We follow Swin (Liu et al., 2021) and use the same training settings without other tricks. Specifically, we use AdamW optimizer (Loshchilov & Hutter, 2017) with an initial learning rate of 0.001, a weight decay of 0.05, batch size of 1024, a cosine decay learning rate scheduler, and a linearly warm-up for 20 epochs. All the models are trained for 300 epochs with augmentation and regularization strategies of (Liu et al., 2021) and exponential moving average (EMA) technique. The input size is 224×224 in default. The output feature of 3rd stage is followed by an average pooling layer and then a classifier layer. We adopt drop path rate of 0.05, 0.3, and 0.5 for HiViT-T/S/B.

Self Supervised Experimental Details For self-supervised pre-training, we use ImageNet-1K training dataset without using labels, and test the pre-trained models by fine-tuning metric in validation dataset. We inherit the pre-training settings of MAE (He et al., 2021) for pre-training. Specifically, we set the mask ratio to 75% in default. The normalized target trick is also adopted. We use the AdamW optimizer (Loshchilov & Hutter, 2017) with the an initial learning rate of 1.5×10^{-4} , a weight decay of 0.05, and the learning rate follows the cosine decay learning schedule with a warm-up for 40 epochs. The batch size is set to 4096 and the input size is 224×224 . The overall pipeline is an encoder-decoder framework and the decoder is designed to have 8 transformer layers followed by a reshape operation to cast the feature to $3 \times 224 \times 224$. As for data augmentation, we only employ random cropping and random horizontal flip. We test HiViT-B and HiViT-L pre-trained for 1600 epochs. When fine-tuning, we inherit the training settings from (He et al., 2021) and the models are trained for 100 epochs using AdamW optimizer with a warm-up for 5 epochs, a weight decay of 0.05, and input size of 224×224 . We use the layer-wise learning rate decay of 0.85. The initial learning rate is set to 5×10^{-4} and batch size is set to 1024.

Dense Prediction Experimental Details We transfer the self-supervised pre-trained models above to object detection on COCO and semantic segmentation on ADE20K. We follow the convention to perform object detection and semantic segmentation experiments. For the COCO experiments, we use the Mask R-CNN (He et al., 2017) head implemented by MMDetection library (Chen et al., 2019). We use the AdamW optimizer (Loshchilov & Hutter, 2017) with an initial learning rate of 3×10^{-4} which decays by $10\times$ after the 9-th and 11-th epochs. The layer-wise decay rate is set to 0.9 and $1\times$ training schedule (12 epochs) is adopted. We also apply multi-scale training strategy and single-scale testing. For ADE20K, we use the UperNet (Xiao et al., 2018) head following BEiT (Bao et al., 2021). We also choose AdamW optimizer and the learning rate is 4×10^{-5} . We totally train the model for 80 iterations and the batch size is 32.